



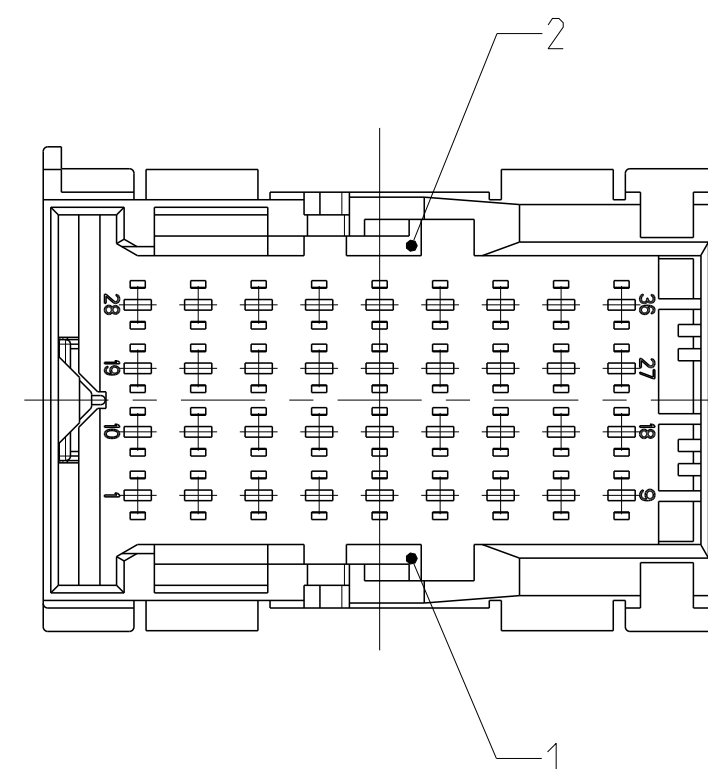

Materialdicke
nach DIN EN 10131 $t = 2.0^{+0.1}_{-0.1}$

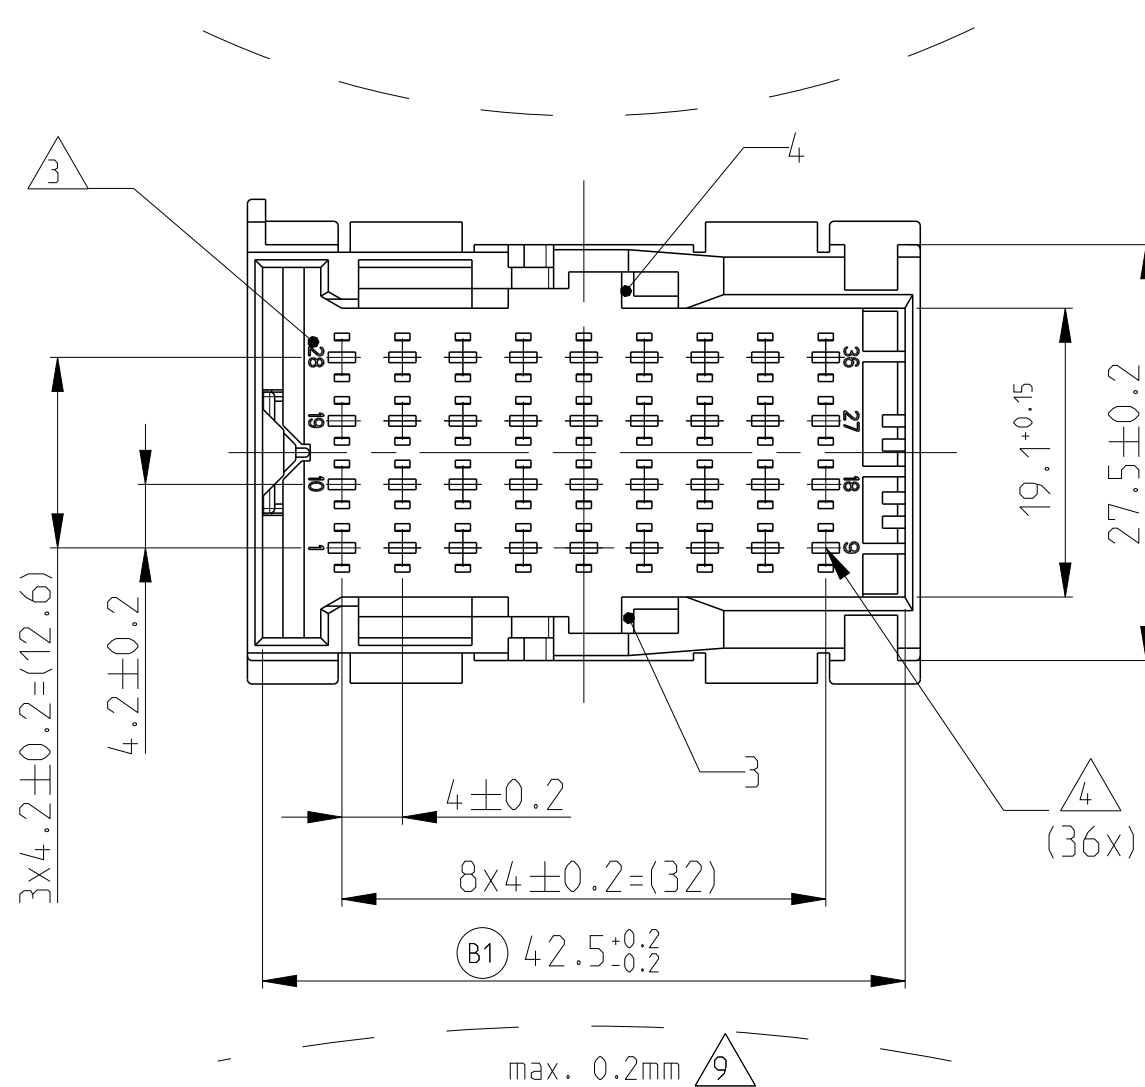

THIS DRAWING IS A CONTROLLED DOCUMENT.

DUKES TECHNOLOGICAL GROUP LTD. UND/ANDER BEFUGTIGTE PERSONEN DÜRFEN KEINE KOPIEEN VON DIESER ZEICHNUNG HERSTELLEN, VERBREITEN ODER AN DREI TERZIERTE VERLEIHEN. IT IS UNLAWFUL FOR ANY PERSONS EMPLOYED BY OR ON BEHALF OF DUKES TECHNOLOGICAL GROUP LTD. TO MAKE, REPRODUCE OR LOAN THIS DRAWING TO ANY OTHER PERSON.

DIMENSIONS:
MASSENEIHEITEN:
mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:
AC. TO ISO 8005
AC. TO DIN, 9001-1:10

0 PLC
1 PLC
2 PLC
3 PLC
4 PLC

ANGLES/WINKEL $\pm 20^\circ$

MATERIAL SEE TABLE
siehe Tabelle

FINISH/OBERFLÄCHE/FARBE
siehe Tabelle

CODING A AS SHOWN
Kodierung A wie gezeigt

This isometric view shows the front of the connector assembly. It features a large, rectangular front panel with a series of 100 pins arranged in two rows of 50. The pins are organized into two main sections, each with a 25-pin row. The assembly is mounted on a base with various mounting tabs and a central latch mechanism.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1718492-2](#)