

PBE-1700



COM Express Type 2 Evaluation Board in ATX Form Factor



Features

- Integrated Gigabit Ethernet
- **COM Express Type 2 Evaluation Board**
- Support Analog RGB, LVDS and TV-out

I/O

I/O Chipset	Winbond W83627HG or Fintek F71869
Serial Port	2 x COM ports (2 x RS-232)
Parallel Port	SPP/EPP/ECP mode
USB Port	6 x USB 2.0 ports
KB/MS	1 x PS/2 keyboard connector 1 x PS/2 mouse connector
Digital I/O	8-bit Digital Input/Output
Expansion Bus	2 x PCIe x1 slots 1 x PCIe x16 slot 4 x PCI slots 2 x Mini-card sockets
Storage	4 x Serial ATA connectors 1 x Ultra ATA 100/66/33 port connector, supporting 2 IDE devices 1 x Floppy disk connector (shared with parallel port) 1 x CompactFlash Type II socket
Ethernet Chipset	1 x RJ-45 Ethernet connector with LED
Audio Interface	Realtek ALC888 7.1 Channel HD Audio CODEC, Mic-in/Line-in/Line-out


Display

Graphics Interface	Analog RGB, LVDS, TV-out connector (depending on CPU module)
---------------------------	--


Mechanical & Environmental

Power Requirement	AT or ATX power connector
Operating Temp.	-20 ~ 70°C (-4 ~ 158°F)
Operating Humidity	10 ~ 95% @ 70°C (non-condensing)
Dimensions (L x W)	305 x 244 mm (12" x 9.6")

Dimensions

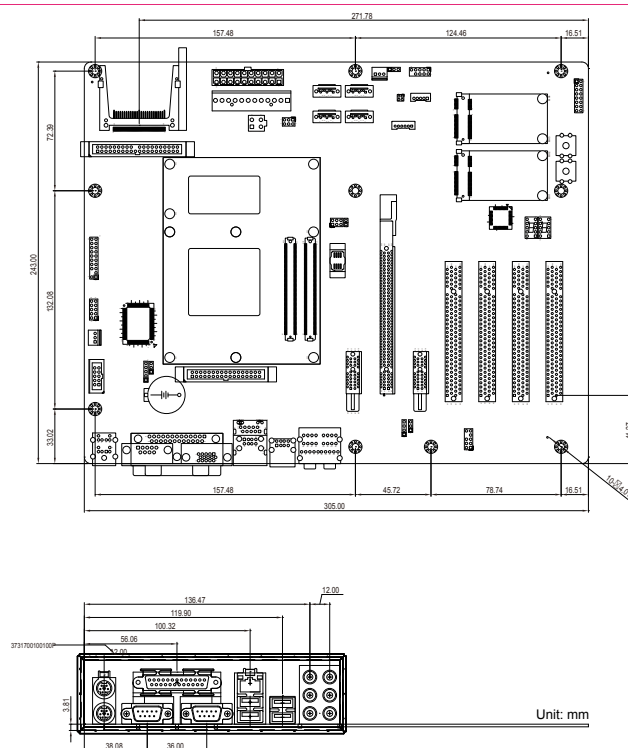

Block Diagram

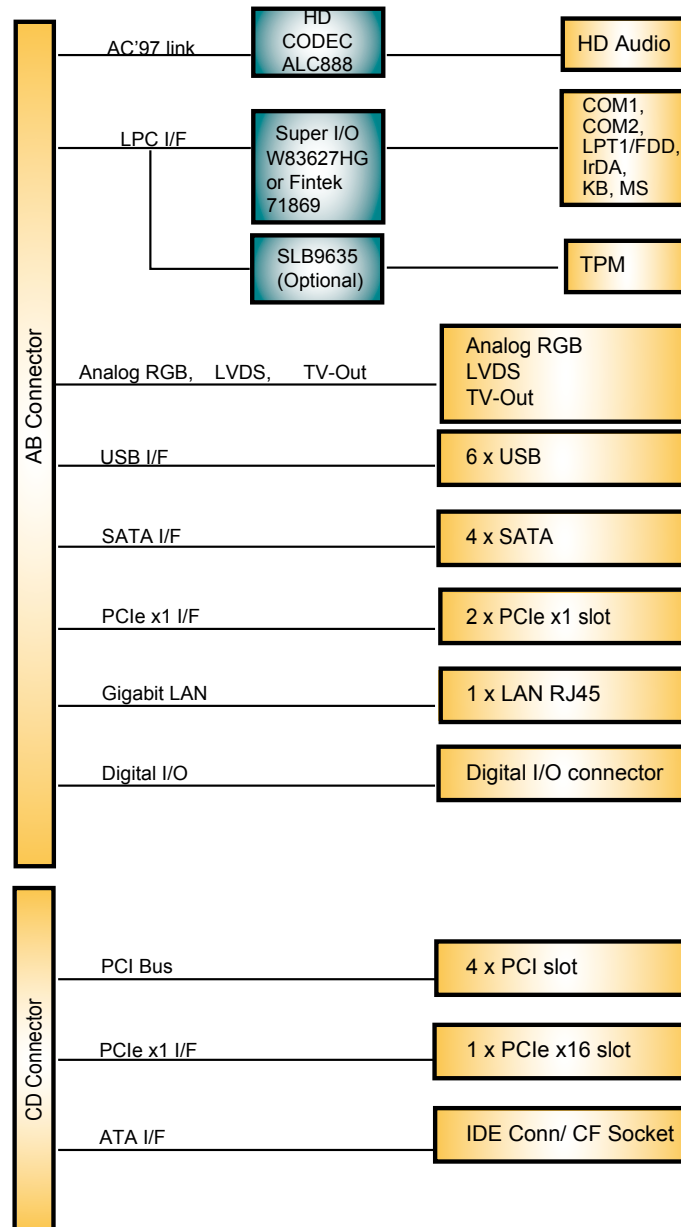

Ordering Information

PBE-1700-W R1.3	COM Express type 2 evaluation board in ATX form factor w/ W83627 Super IO
PBE-1700-F R1.3	COM Express Type 2 evaluation board in ATX form factor w/ F71869 Super IO

Optional Accessories

CBK-04-1700-00	Cable kit • 1 x SATA cable • 1 x COM port cable • 1 x FDD cable • 1 x IDE cable
-----------------------	---

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ARBOR Technology:](#)

[PBE-1700-F](#) [PBE-1700](#)