
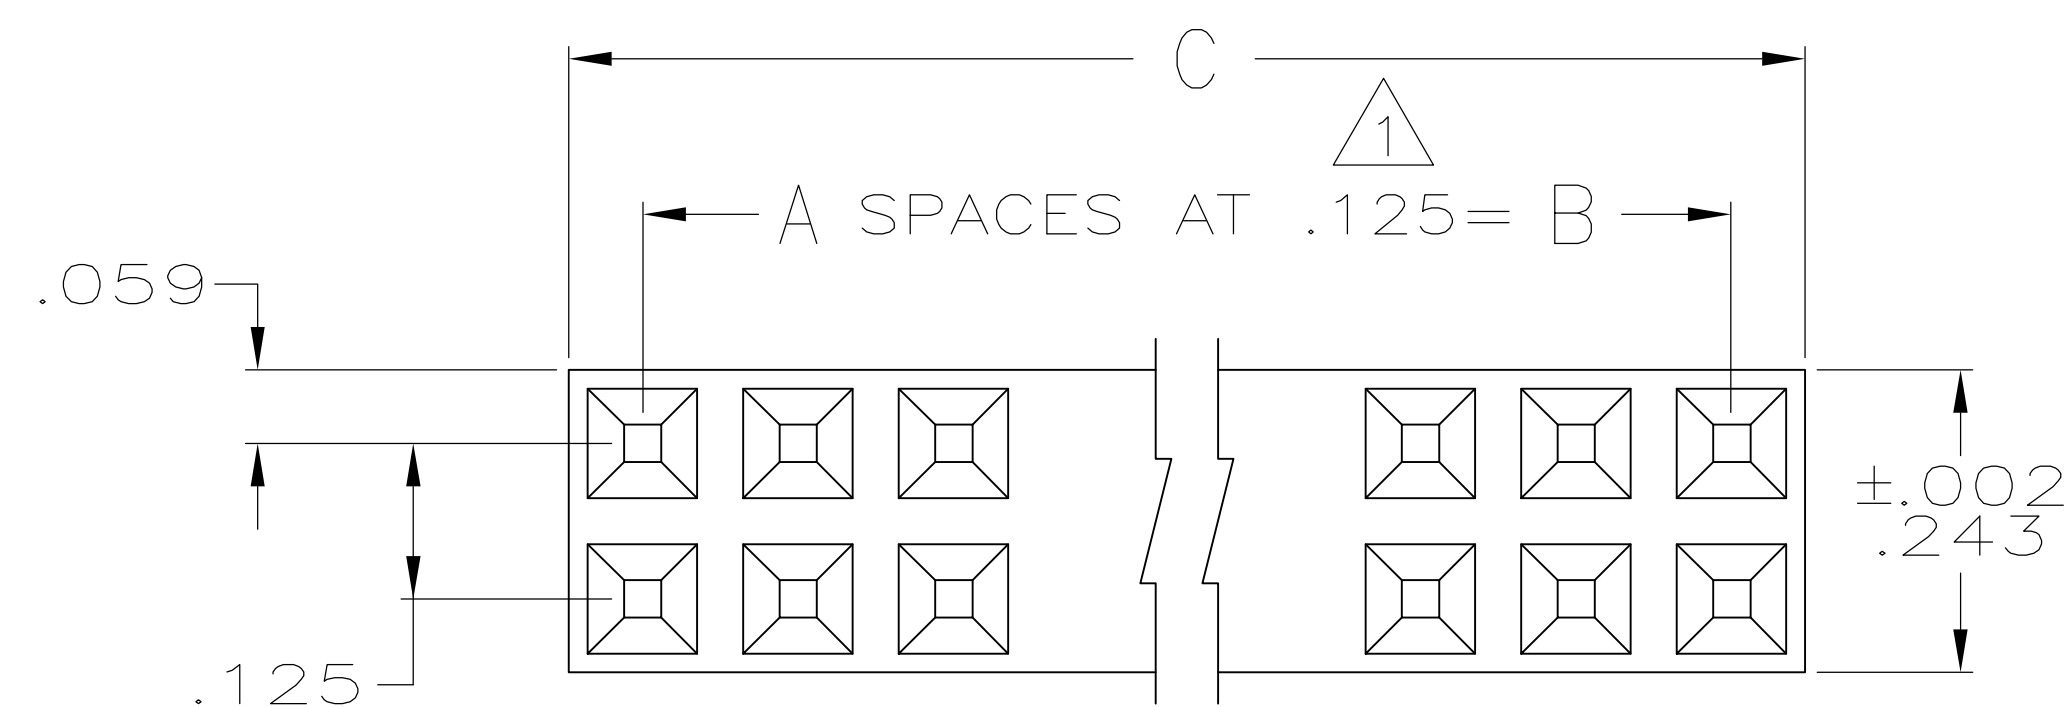
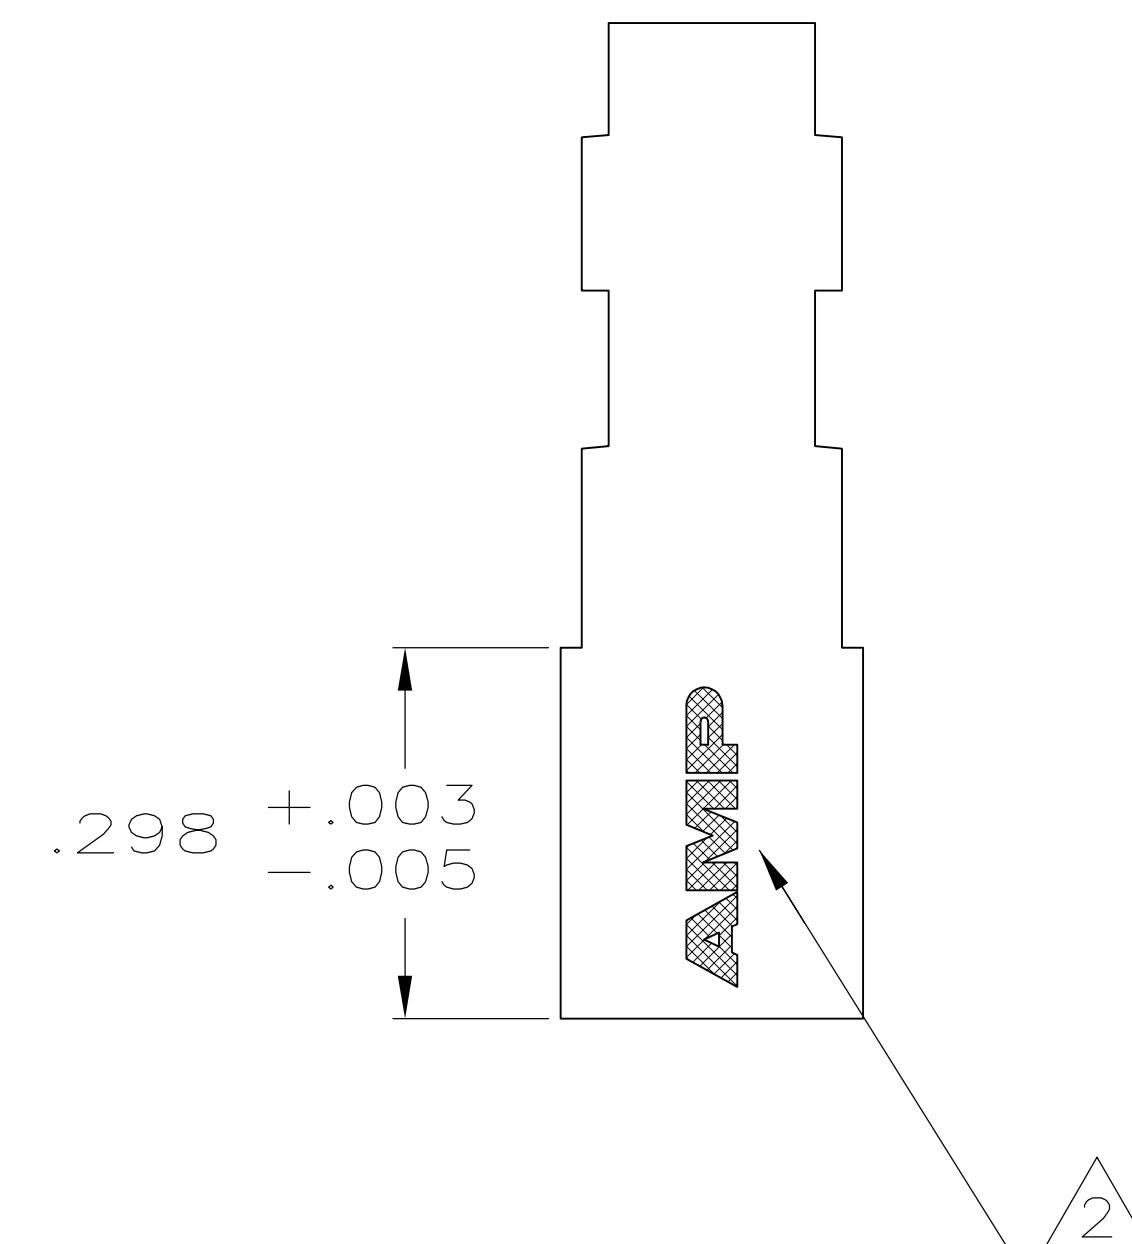
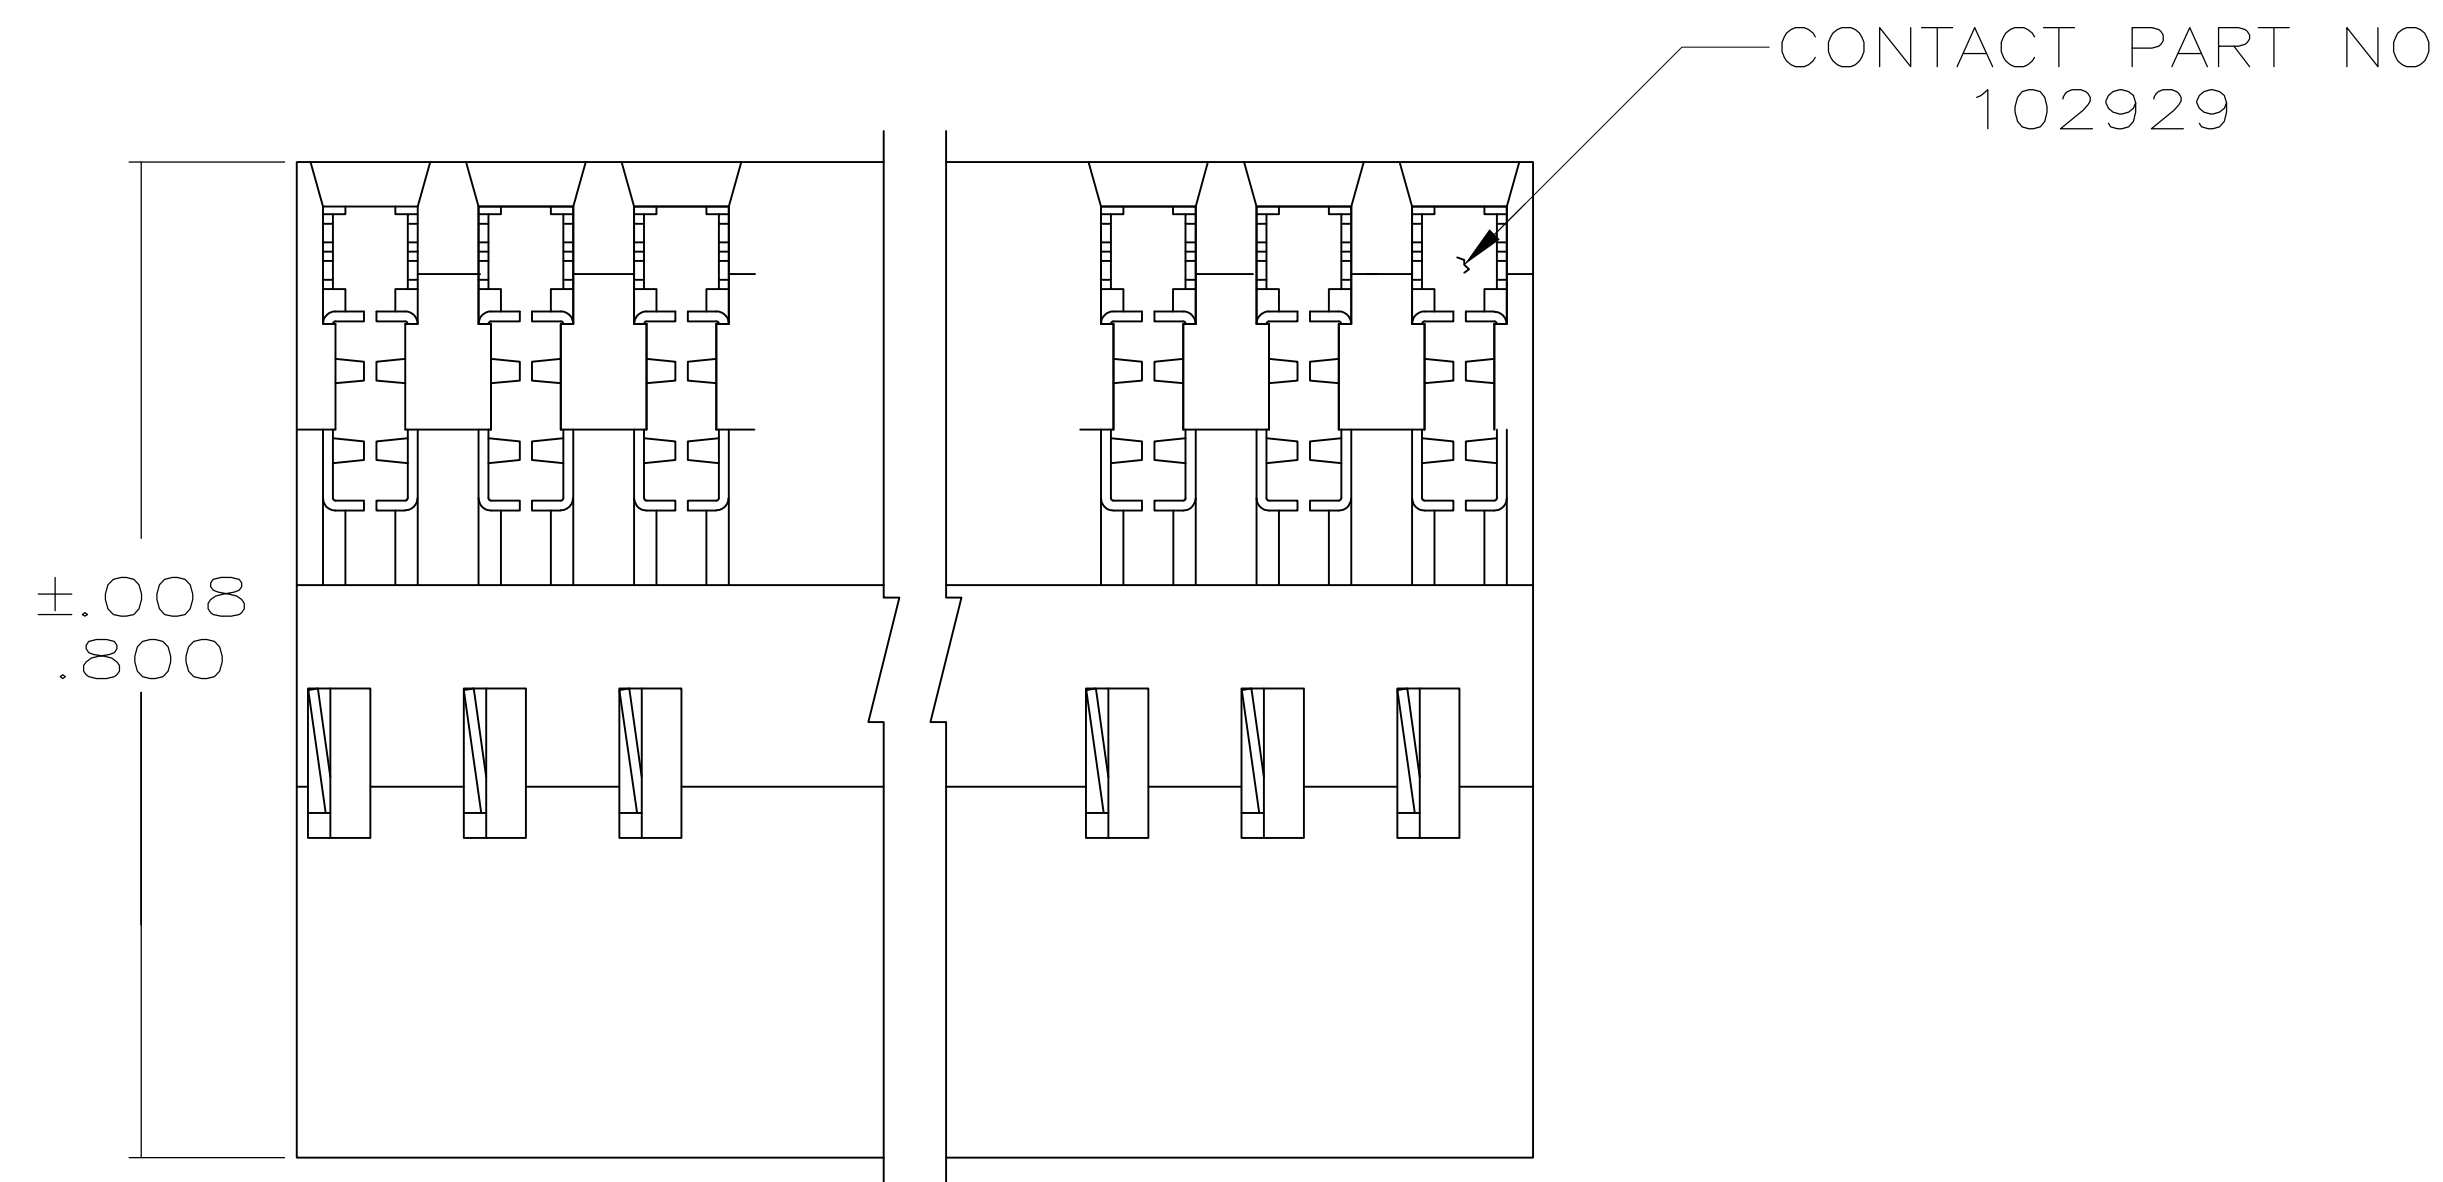


- 1 CAVITY LOCATION DIMENSIONS INCREASE IN INCREMENTS OF .125 – TOLERANCE NON-CUMULATIVE
- 2 AMP LOGO MOLDED IN APPROXIMATE AREA SHOWN.
- 3 .000050 GOLD IN CONTACT AREA, .000100—.000200 TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 4 .000030 GOLD IN CONTACT AREA, .000100—.000200 TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.



		1.868	1.750	14	30	5-5102935-7
		2.493	2.375	19	40	3-5102935-6
		1.993	1.875	15	32	2-5102935-8
		1.493	1.375	11	24	1-5102935-9
		1.243	1.125	7	20	1-5102935-6
		.993	.875	9	16	1-5102935-2
		.743	.625	5	12	5102935-8
		.618	.500	4	10	5102935-6
		.493	.375	3	8	5102935-4
		.368	.250	2	6	5102935-2
REMARKS	FINISH	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN 040CT20B4 S. BURKHOLDER		 TE Connectivity	
DIMENSIONS:		CHK M. YEOMANS 22NOV04			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. YEOMANS 22NOV04		NAME RECEPTACLE ASSY, LEVEL V DOUBLE ROW, .125 x .125 CL #22 - #26 Gage, LEAD FREE	
INCHES		PRODUCT SPEC			
		APPLICATION SPEC			
		SIZE			
		GAGE CODE			
		DRAWING NO			
MATERIAL		FINISH		RESTRICTED TO	
-		-		-	
CUSTOMER DRAWING		WEIGHT		A1 00779 © 5102935	
				SCALE 4:1 SHEET 1 of 1 REV D2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5102935-6](#)