




- 1. RECOMMENDED SPARE PARTS.
- 2. GREASE RAM, CAM, CAM FOLLOWER AND FEED ROD LIGHTLY.
- 3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
- 4. CUT TO LENGTH AT ASSY.
- 5. HOLD DOWN AND TERMINAL SUPPORT NOT REQUIRED FOR SOCKET. REPOSITION WHEN USED FOR PIN VERSION.

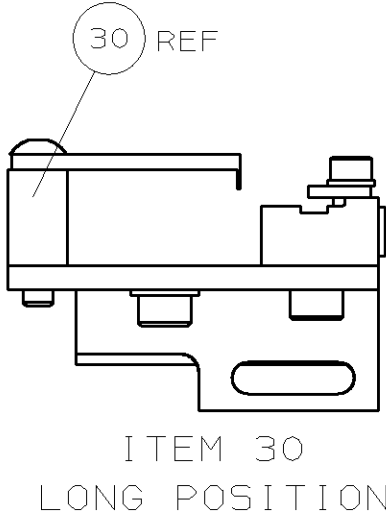

		B	0150-0813-03
		A	SEE ECN 015A-0397-C
P	F	LTR	REVISION RECORD

QTY REQD PER ASSY				PARTS LIST			
BH JUL03 JUL02 APP	DATE	DIMENSIONS: mm (INCHES) DO NOT SCALE PRINT.		MATL	HT TR	FIN	
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DR 05JUN02	APP 05JUN02		
		1 PLC DEC ± 0.5 [0.02 IN]		L: LOFHOUSE	F: BACKHURST		
		2 PLC DEC $\pm$		CHK -	REL 05JUN02		
		3 PLC DEC $\pm$			L: LOFHOUSE		
ANGLES $\pm$		NAME			MACHINE REF		
SURF TEXTURE: ☒		SIDE FEED HD-I APPLICATOR			HD-I APPL		
REMOVE BURRS, BREAK SHARP EDGES RO. 38 MAX		SCALE	DWG NO	SHEET			
		-	D	1426344	1 OF 1		
		CASE CODE	CUSTOMER AND ASSEMBLY DRAWING				
		000779	RESTRICTED TO				
			-				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1426344-6](#)