
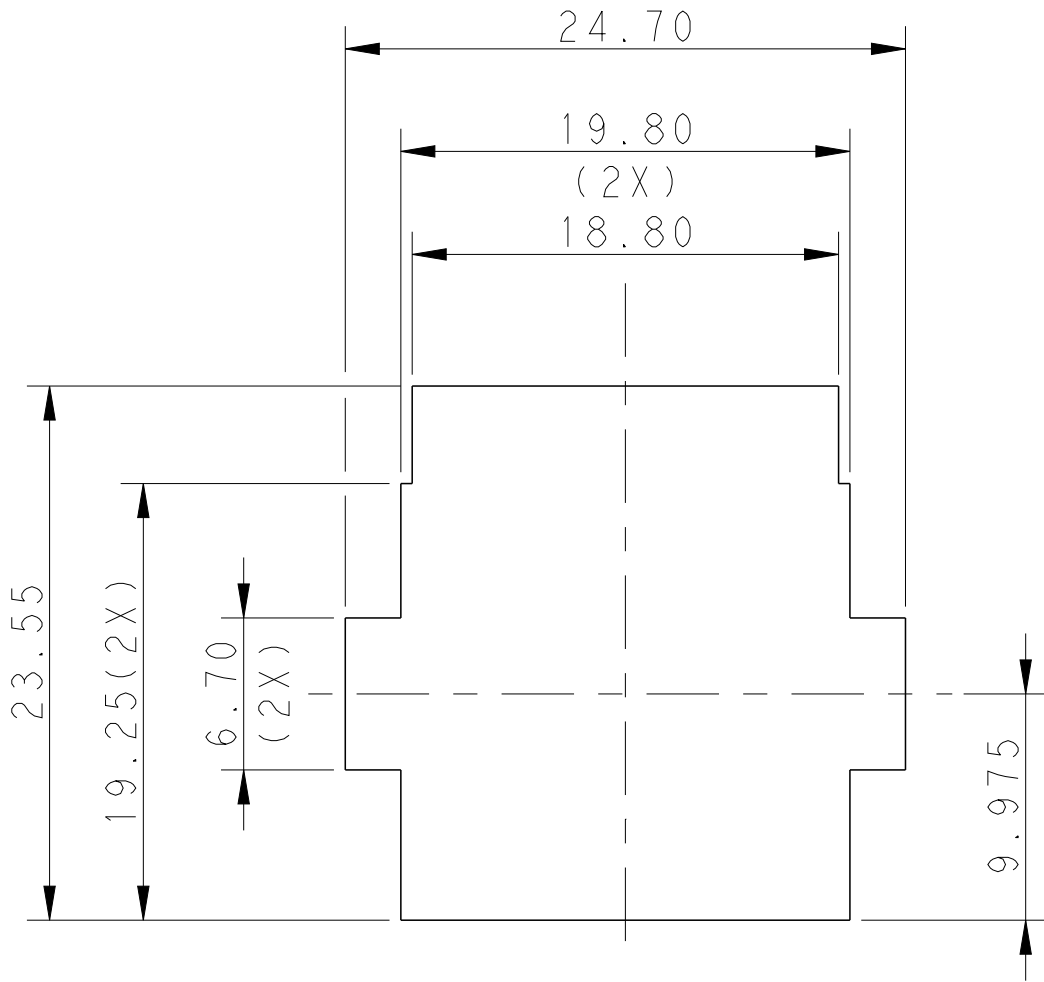
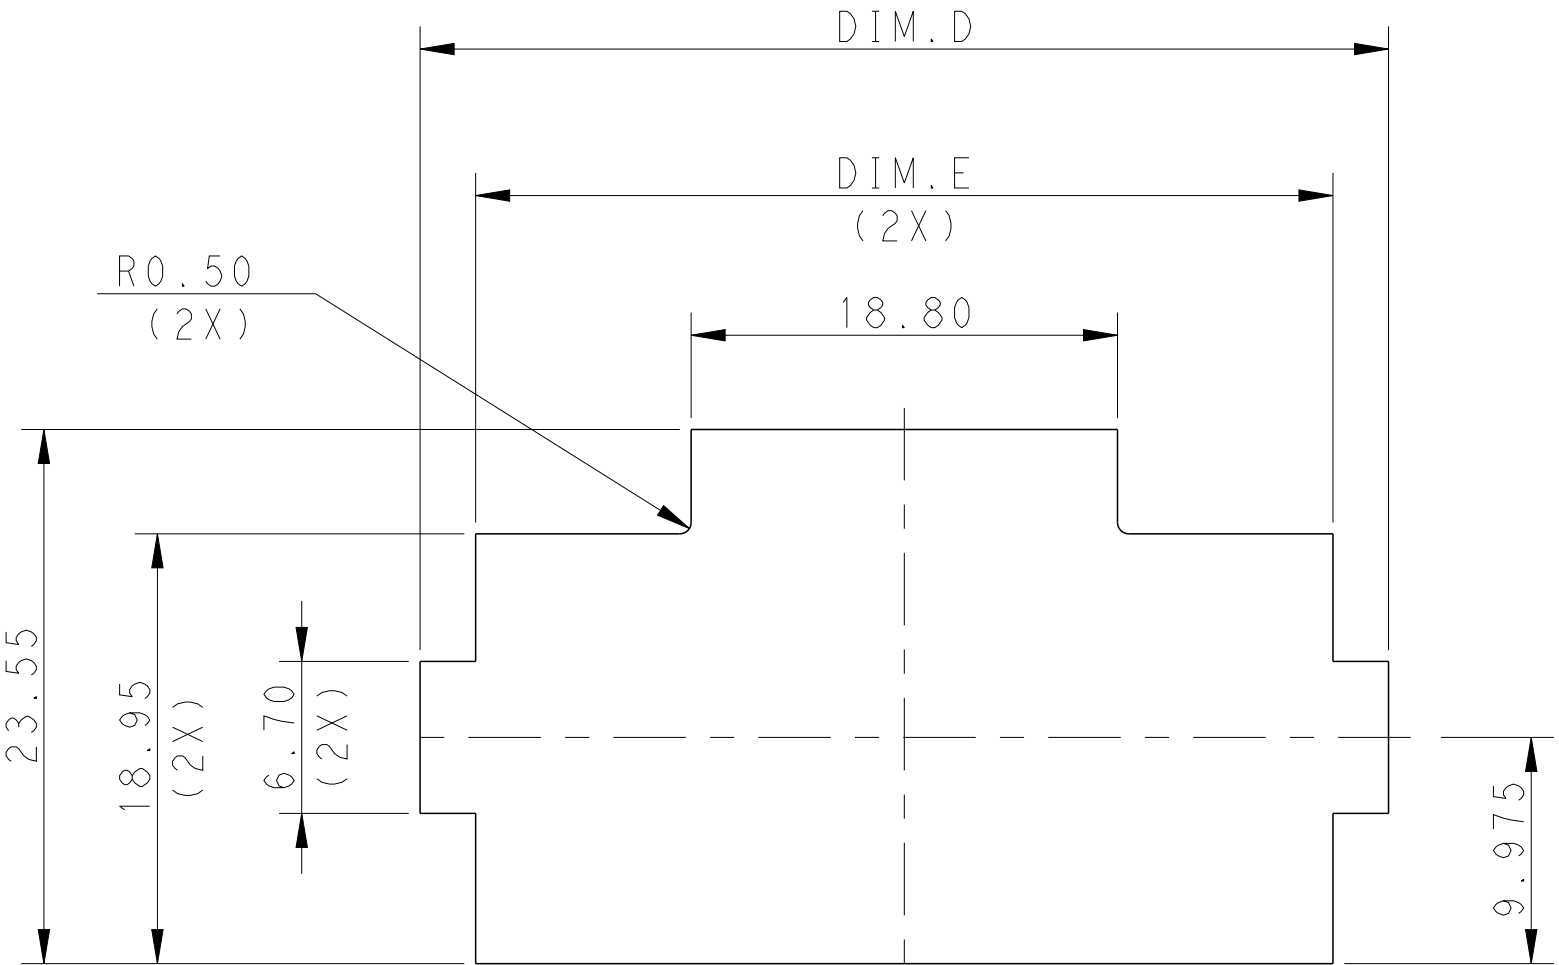






REVISIONS					
LOC	DIST	P	LTR	DESCRIPTION	DATE
-	-	B		REVISED PER ECR-16-003314	18JUL2016

DWN	APVD
BW	GJ

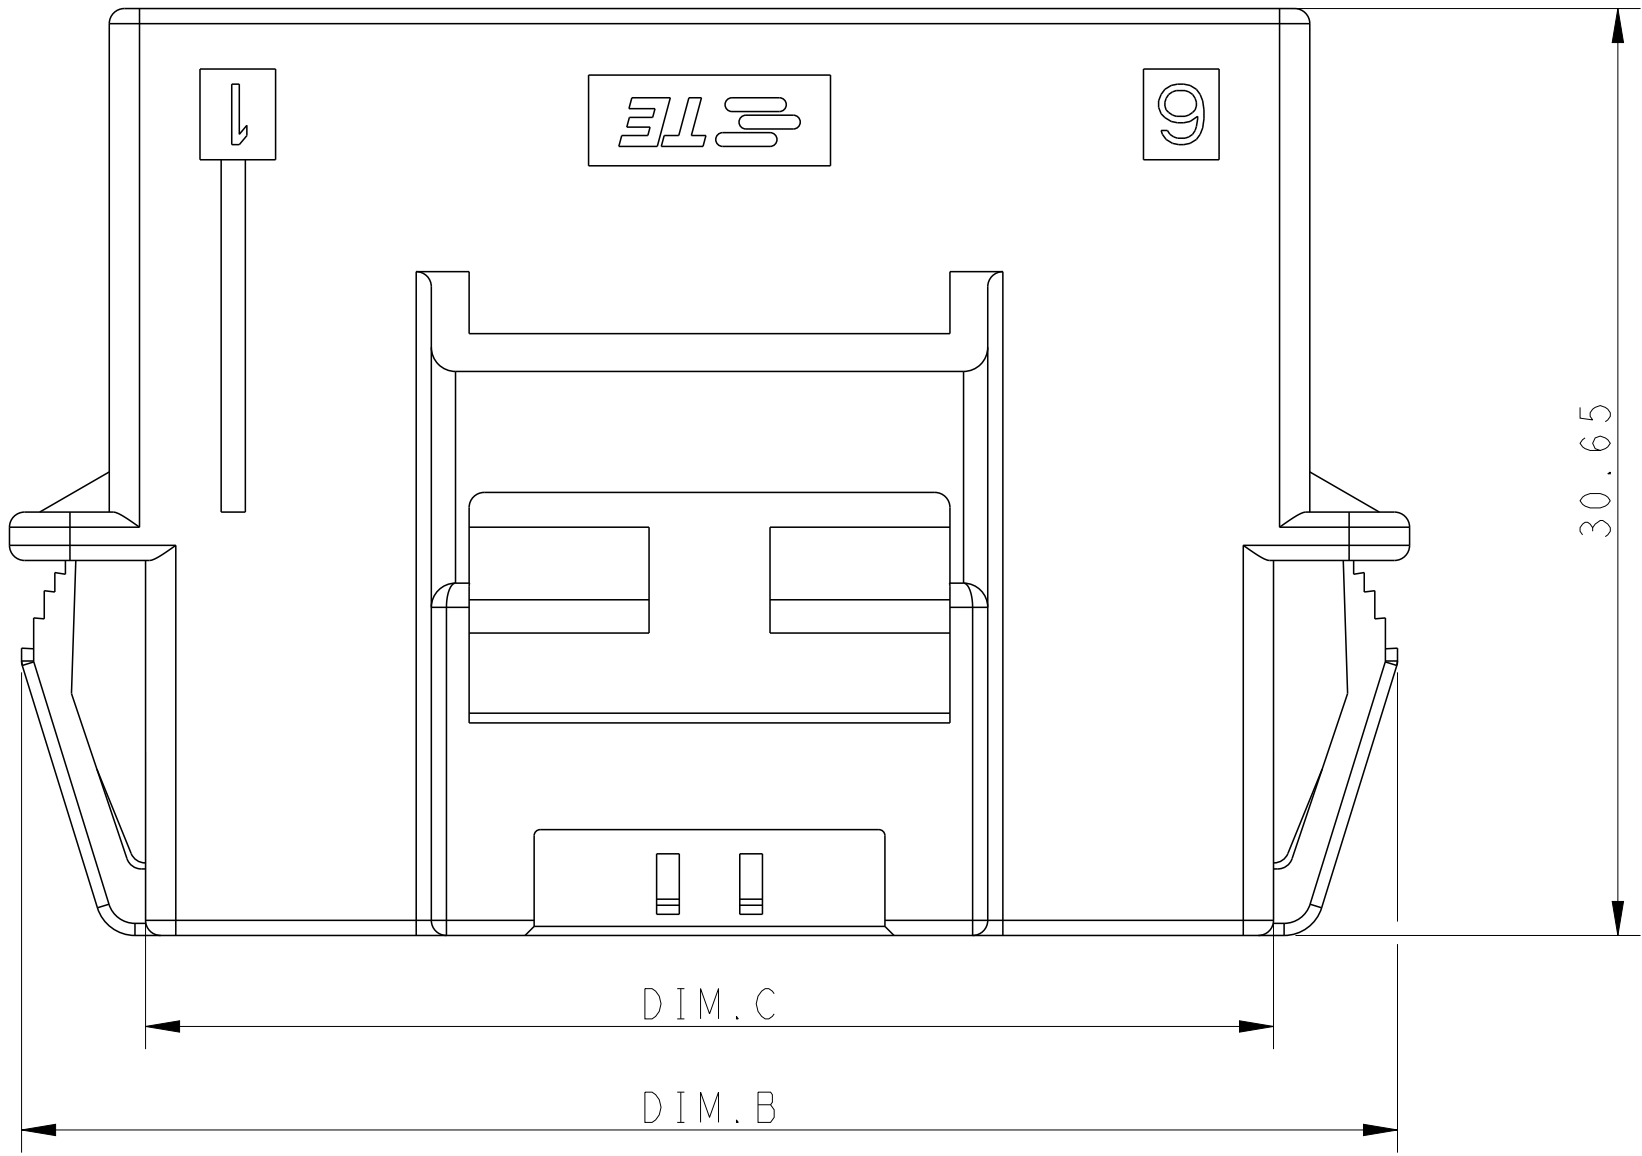

RECOMMENDED PANEL OPENING DEMENSIONS
FOR CAP HOUSING 2*6 AND 2*5 AND 2*4 POSITIONS
(TOLERANCE: ±0.15mm)

RECOMMENDED PANEL OPENING DEMENSIONS
FOR CAP HOUSING 2*3 POSITION
(TOLERANCE: ±0.15mm)

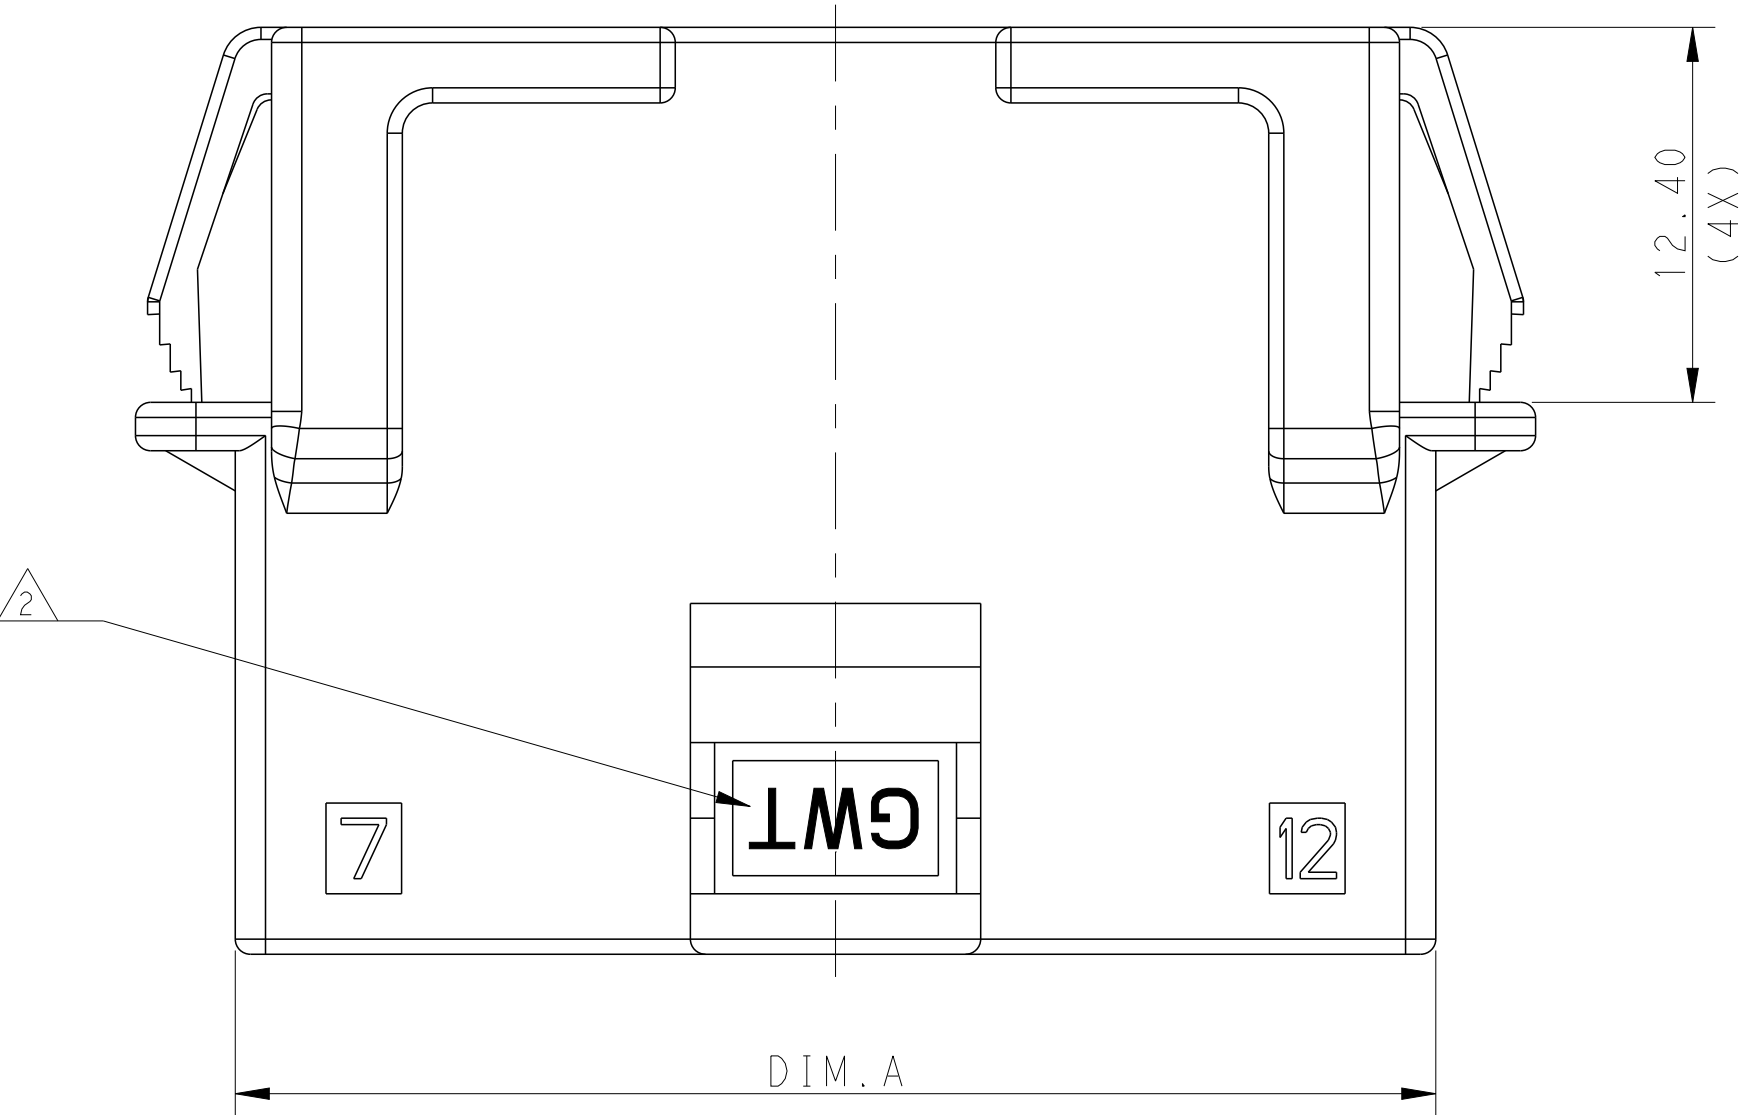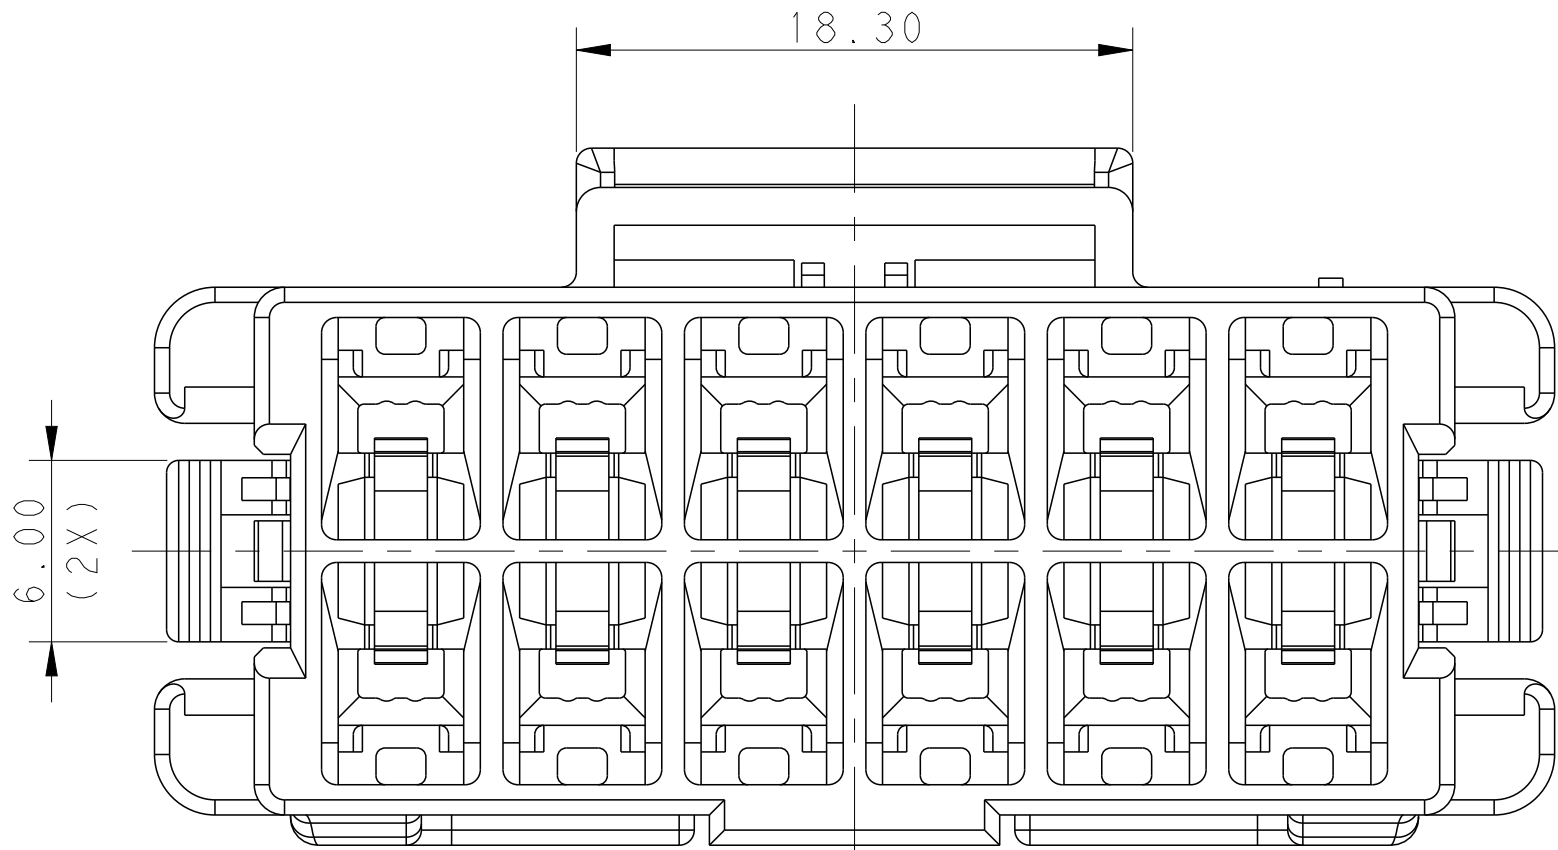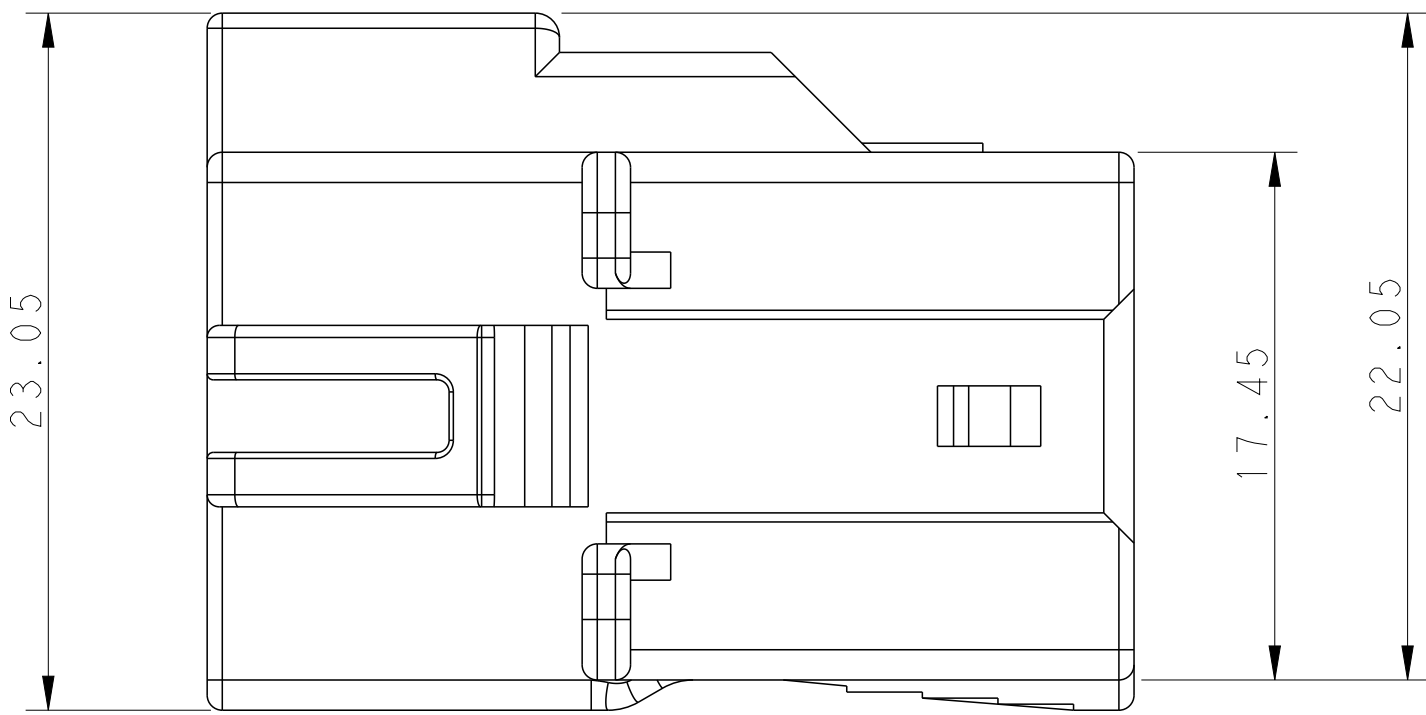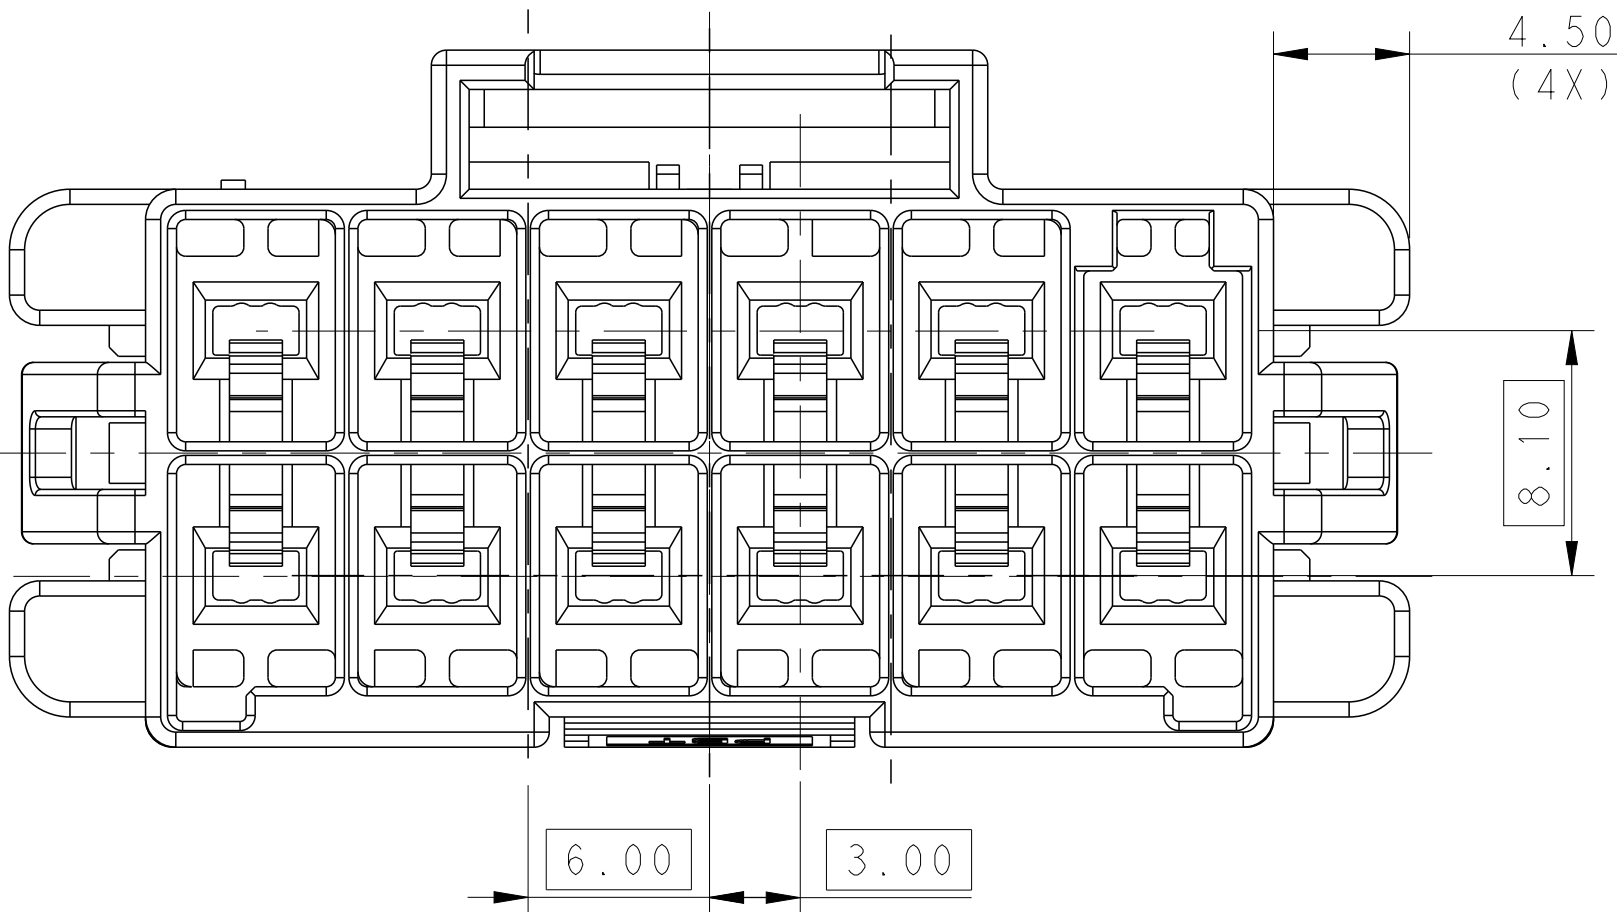

1. MATERIAL:
LEVEL A: PA6 GLASS FILLED, COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION DETAILED IN IEC 60335-1, SECTION 30 (GWT),UL 94V-0
LEVEL B: PBT GLASS FILLED, HOT WIRE IGNITION (HWI) VERSION ARE MOLDED IN A RESIN THAT COMPLIES WITH TE HOT WIRE IGNITION TEST 109-32026 AND ARE RECOMMENDED FOR USE WITH HWI HOUSINGS THAT ALSO COMPLY, UL 94V-0

2. MATERIAL MARK:
LEVEL A:GWT,LEVEL B:HWT

3. APPLICABLE CONTACT P/N
TAB CONTACT:1971238/1971780/82/84/86/88-*,2238067-*

4. MATING CONN, P/N
PLUG HSG: *-2232266-
TPA (LOCK PLATE): *-1971778-*



5. RECOMMENDED PANEL THICKNESS:1.0~2.0mm

6. THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING.



POS	A	B	C	D	E
2*6	39.70	45.5	37.30	42.70	37.80
2*5	33.70	39.5	31.30	36.70	31.80
2*4	27.70	33.5	25.30	30.70	25.80
2*3	21.70	27.5	19.30		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TOMMY_WU		26MAR2013		 TE Connectivity	
		CHK	HAPYE_WU		26MAR2013			
DIMENSIONS:	mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	YUZHONG_MAO		26MAR2013	
				PRODUCT SPEC				
		0 P/LC ±		108-106118				
		1 P/LC ±.35		APPLICATION SPEC				
		2 P/LC ±.25		114-106118				
		3 P/LC ±		WEIGHT				
MATERIAL		4 P/LC ±						
		ANGLES ±						
FINISH								



LOC		DIST		REVISONS			
P	LYR	DESCRIPTION			DATE	OWN	APVD
-	-	SEE SHEET 1			-	-	-

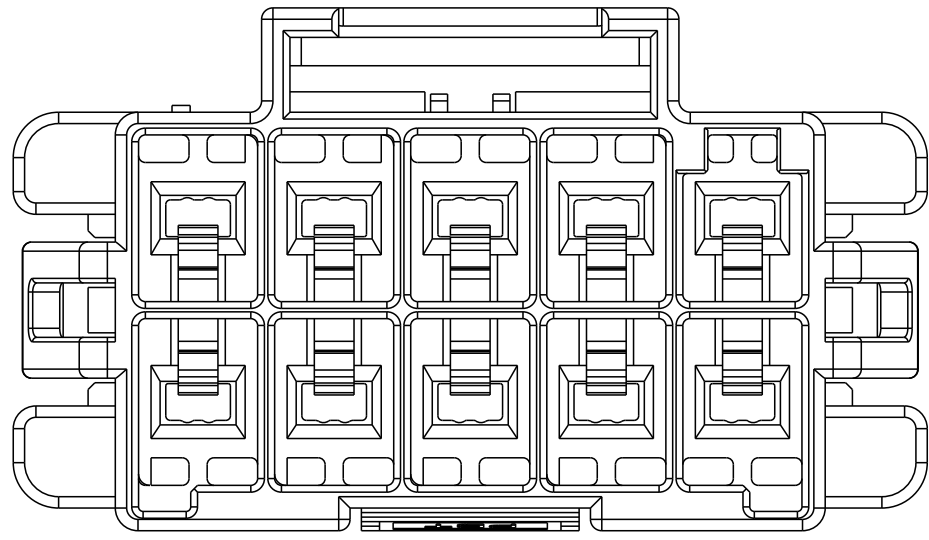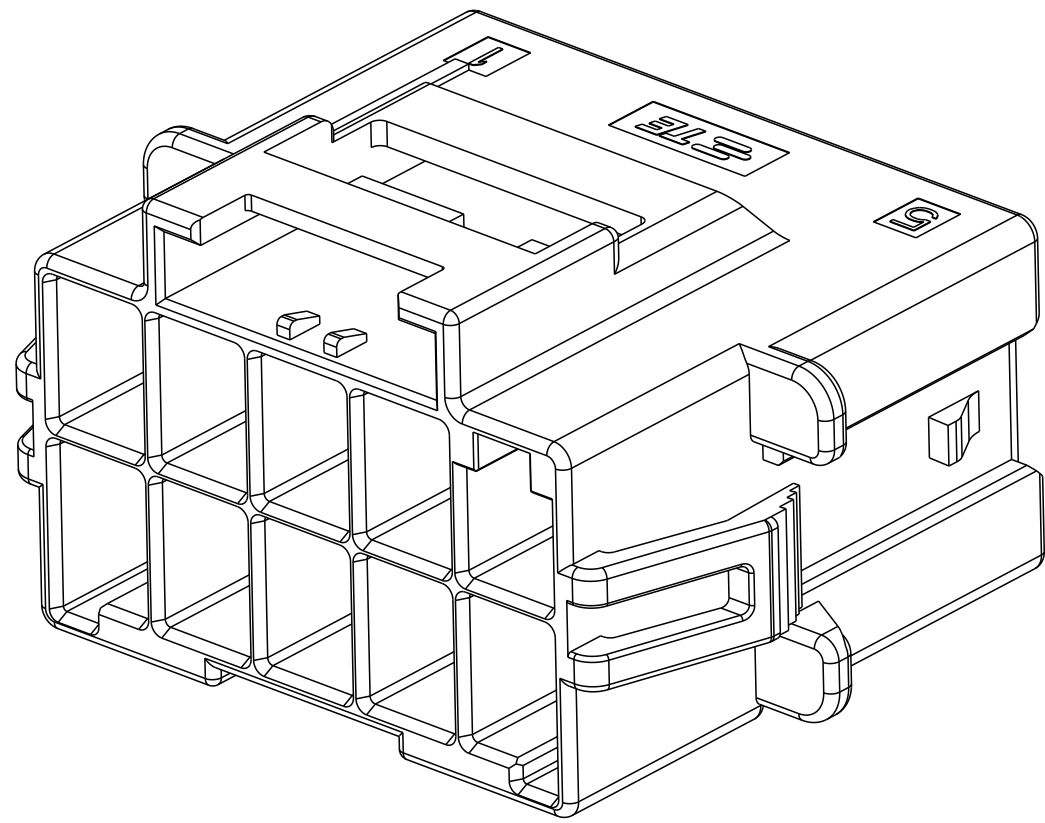





2*5 POSITIONS

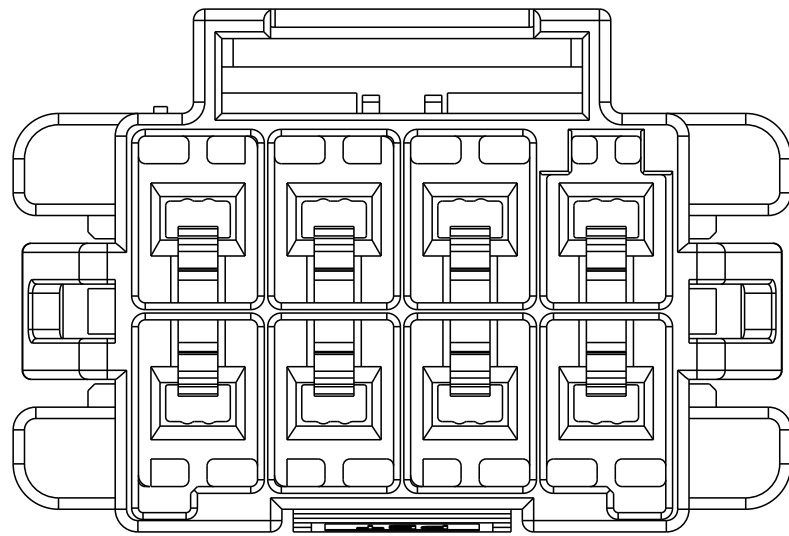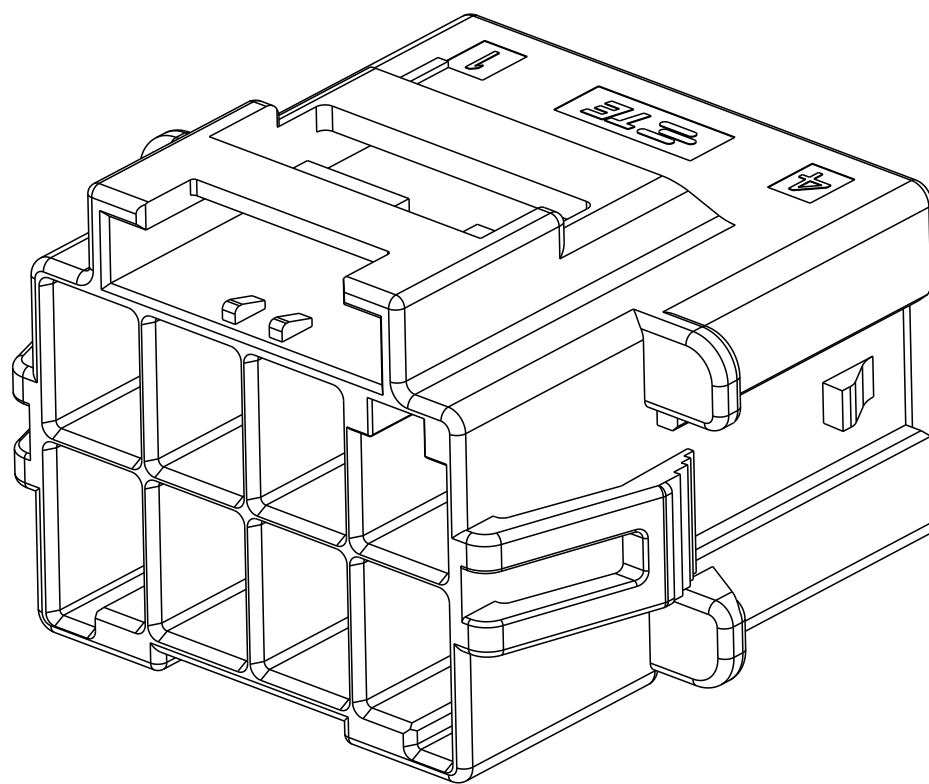





2*4 POSITIONS

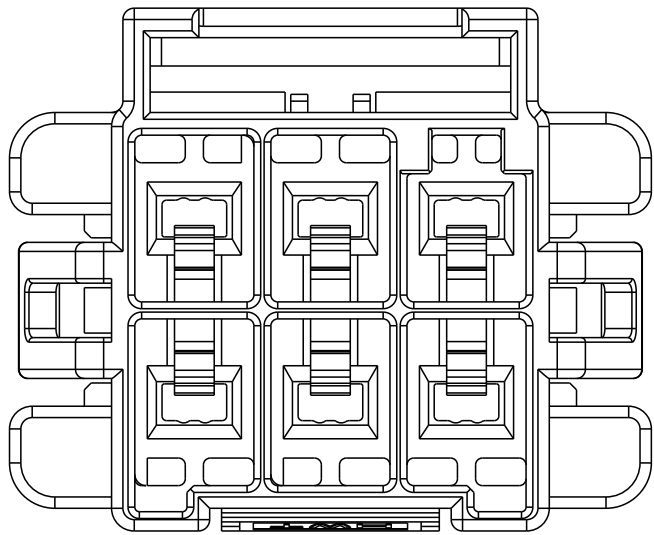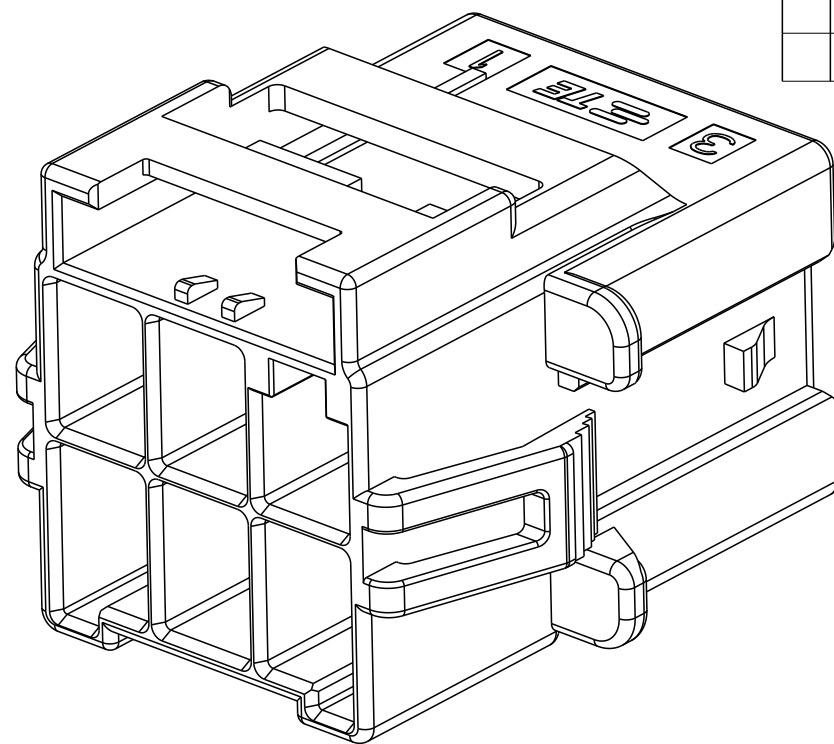





2*3 POSITIONS

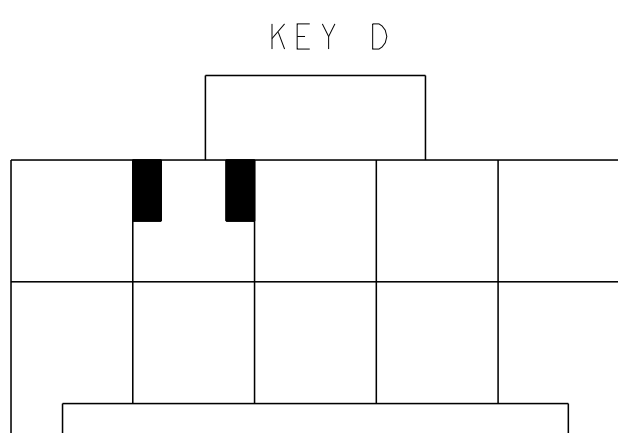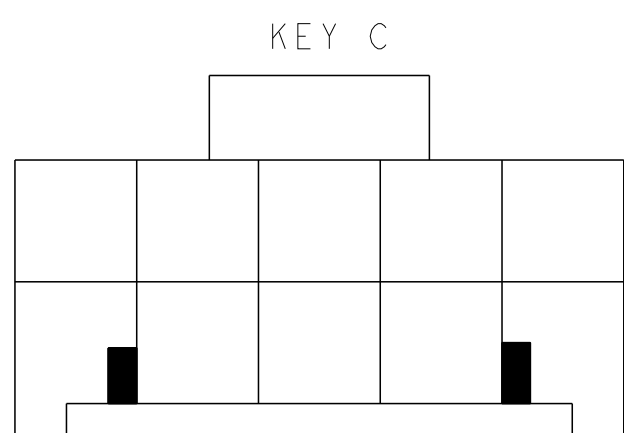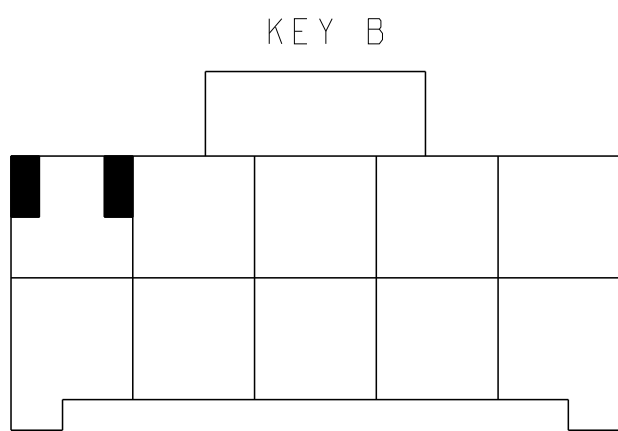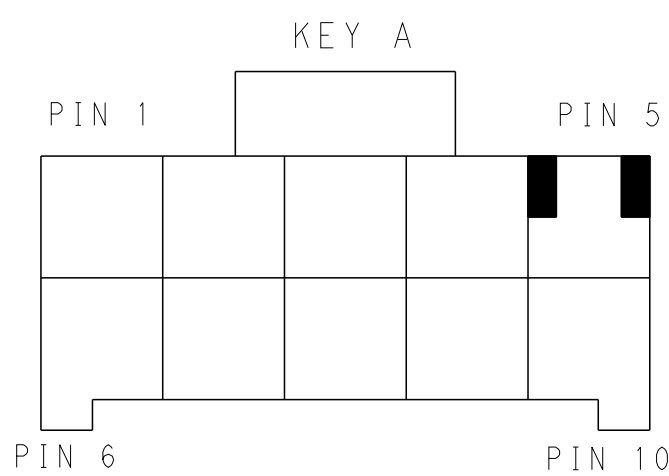



KEYING FOR 2*5 POS.

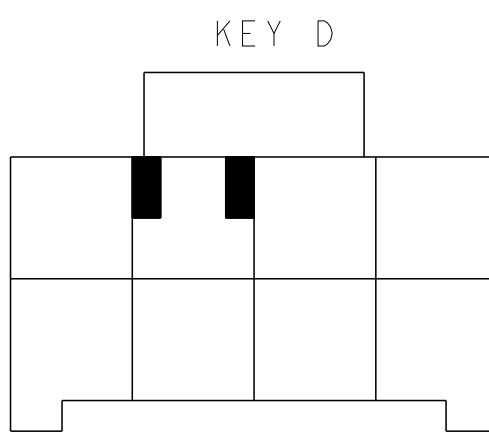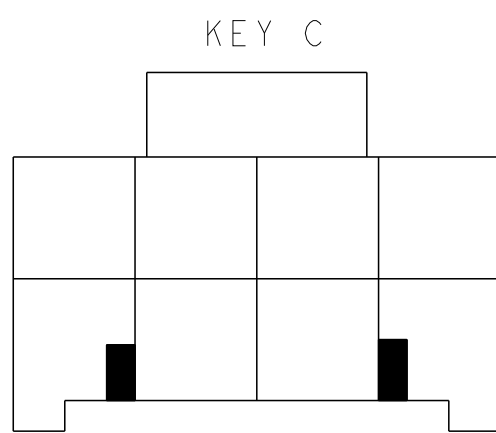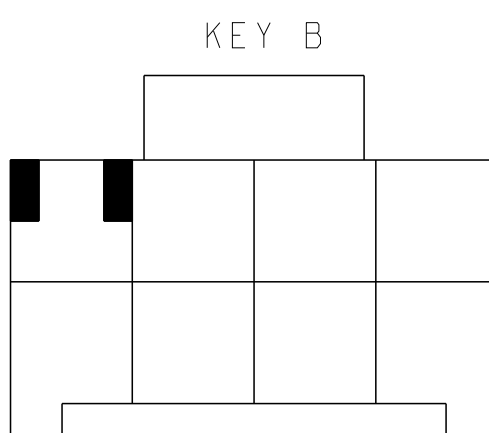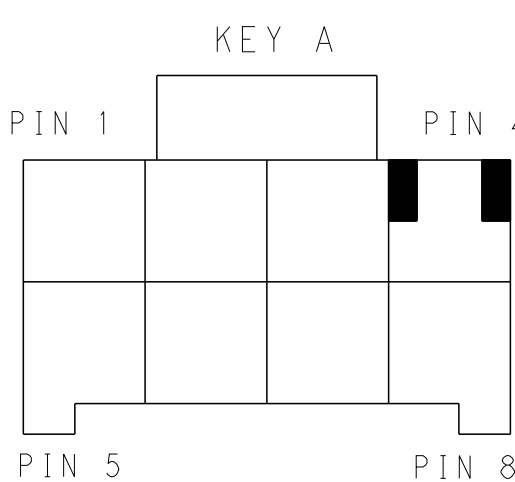





KEYING FOR 2*4 POS.

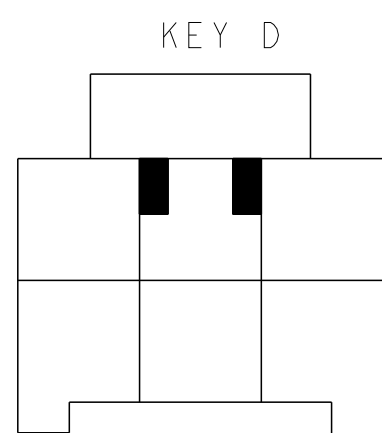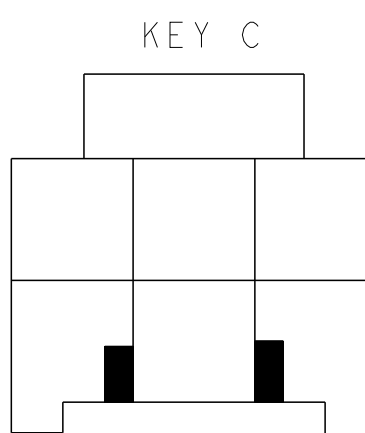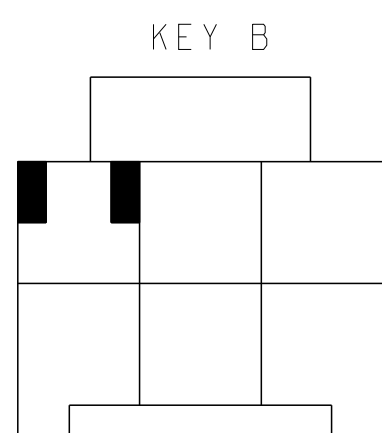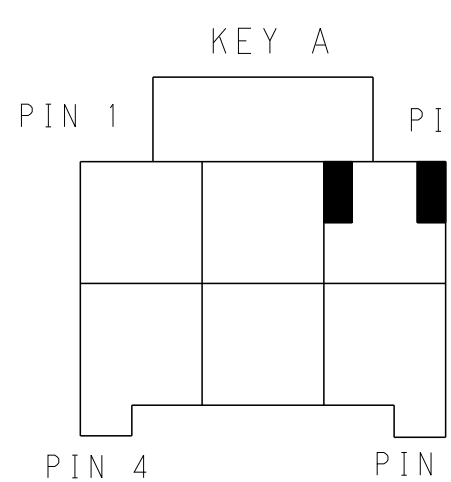

KEYING FOR 2*3 POS.

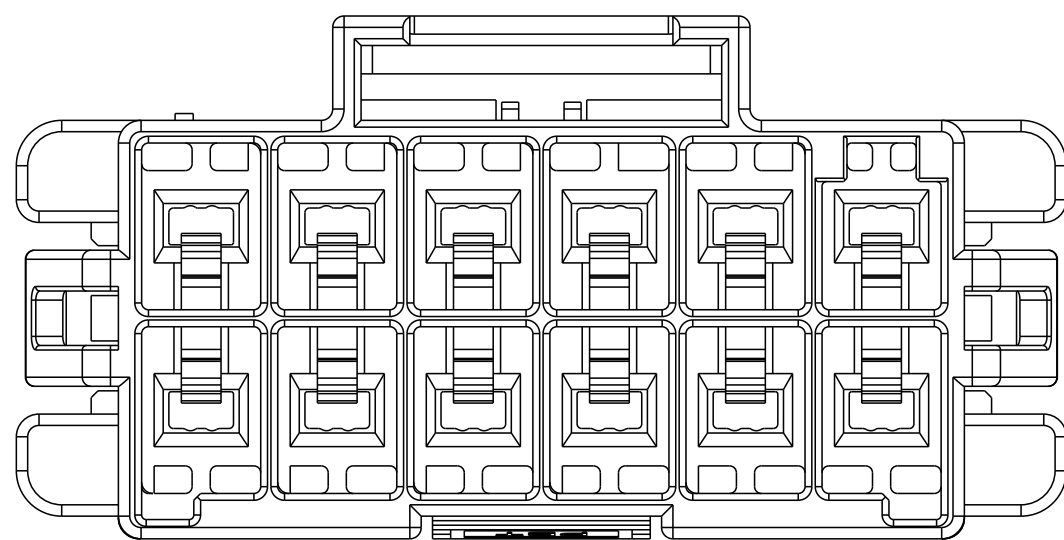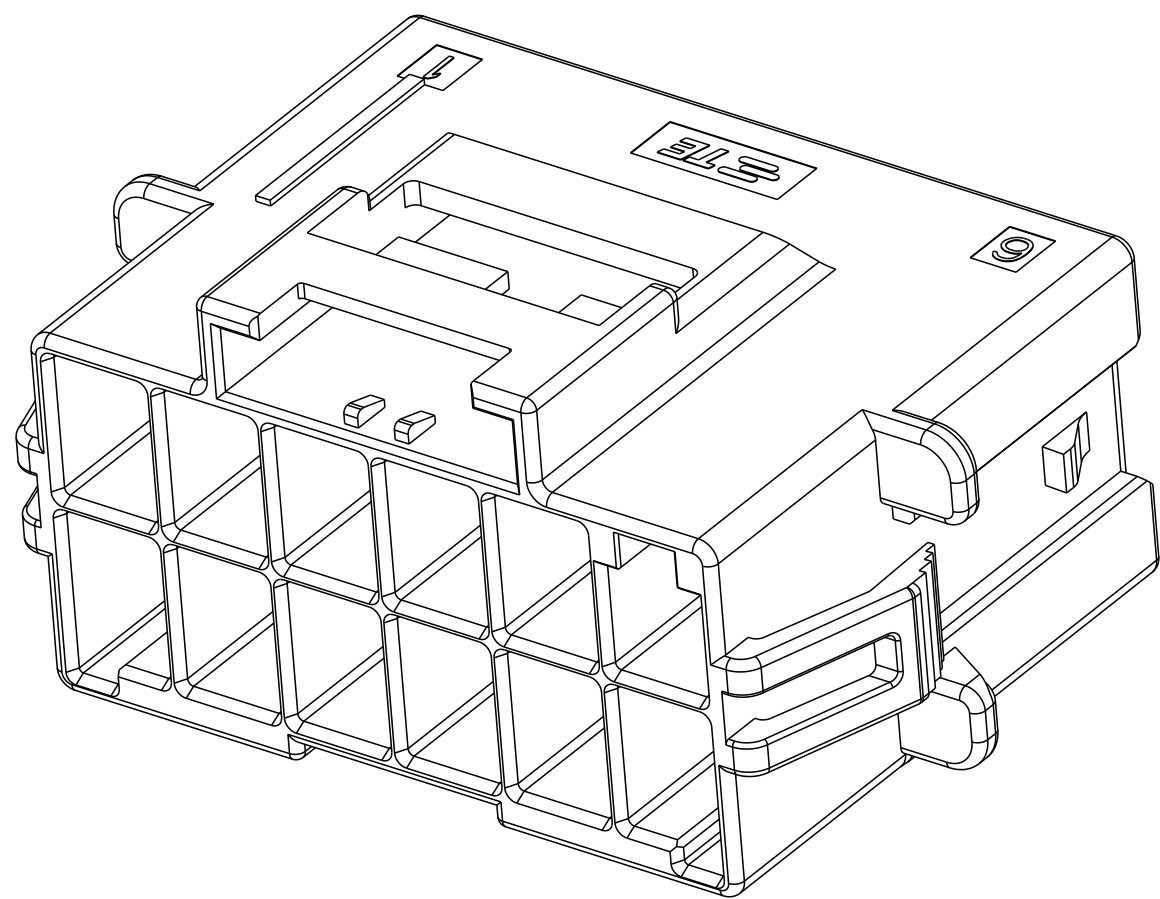

2*6 POSITIONS

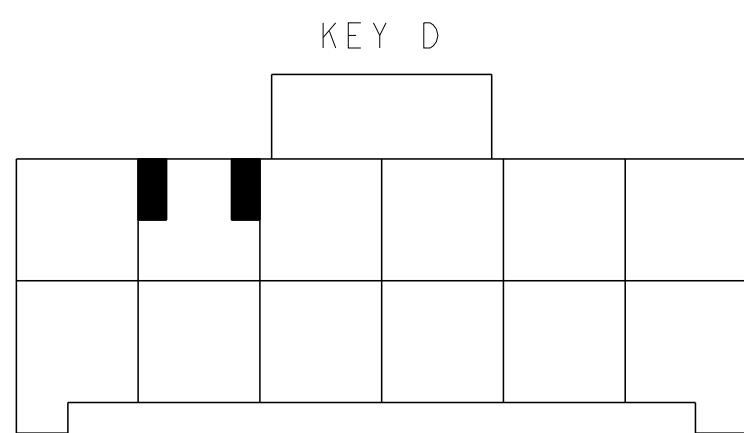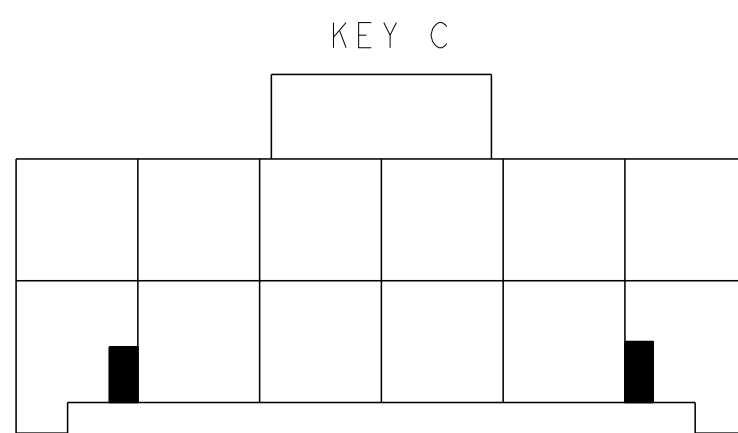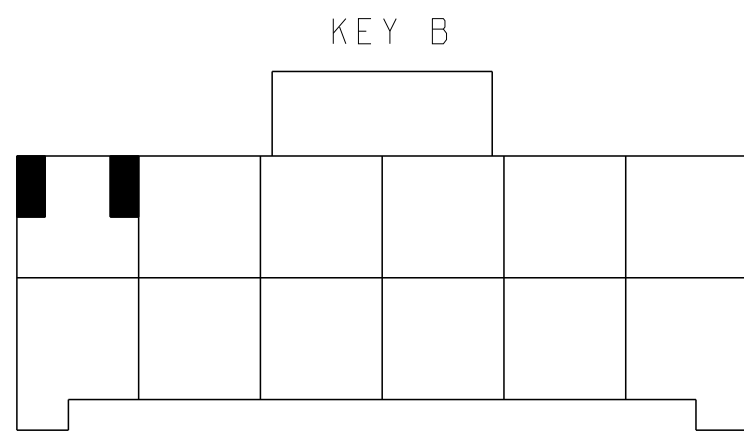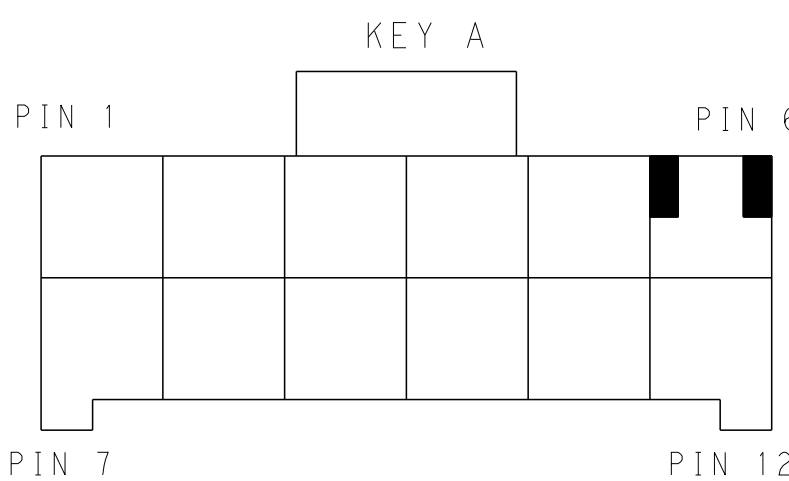

KEYING FOR 2*6 POS.

2*6	LEVEL A	DARK GREY	KEY A	5-2232264-6
		BROWN	KEY B	6-2232264-6
		GREEN	KEY C	7-2232264-6
		ORANGE	KEY D	8-2232264-6
2*5	LEVEL A	DARK GREY	KEY A	5-2232264-5
		BROWN	KEY B	6-2232264-5
		GREEN	KEY C	7-2232264-5
		ORANGE	KEY D	8-2232264-5
2*4	LEVEL A	DARK GREY	KEY A	5-2232264-4
		BROWN	KEY B	6-2232264-4
		GREEN	KEY C	7-2232264-4
		ORANGE	KEY D	8-2232264-4
2*3	LEVEL A	DARK GREY	KEY A	5-2232264-3
		BROWN	KEY B	6-2232264-3
		GREEN	KEY C	7-2232264-3
		ORANGE	KEY D	8-2232264-3
	LEVEL B	BLACK	KEY A	1-2232264-1
POS.	MATERIAL	COLOR	KEY	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TOMMY_WU 26MAR2013		 TE Connectivity	
		CHK HAPYE_WU 26MAR2013			
		APVD YUZHONG_MAO 26MAR2013			
		PRODUCT SPEC			
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME CAP HOUSING,PANEL MOUNT,DOUBLE ROW POWER TRIPLE LOCK	
mm		108-106118			
		114-106118			
		WEIGHT			
				SIZE	
MATERIAL		FINISH		CAGE CODE	
				DRAWING NO	
				RESTRICTED TO	
				A100779G-2232264	
		Customer Drawing		SCALE	
				SHEET	
				2 of 2	
				REV B	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-2232264-5](#)