

FED. MFR. CODE 91929

ASSEMBLY - TOGGLE SWITCH

CATALOG LISTING

5ATI

(M) 5A T I
ISSUE 4

REPLACES

5ATI

Σ

DRAWING
NUMBER

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----

8

NAME

RELEASE NO.

33

—

3
CK

25. CH

三

1

CHECK

3.

3

FY

55 | CHECK


ENR

L. Z. 2

R

DRAWN

74-98

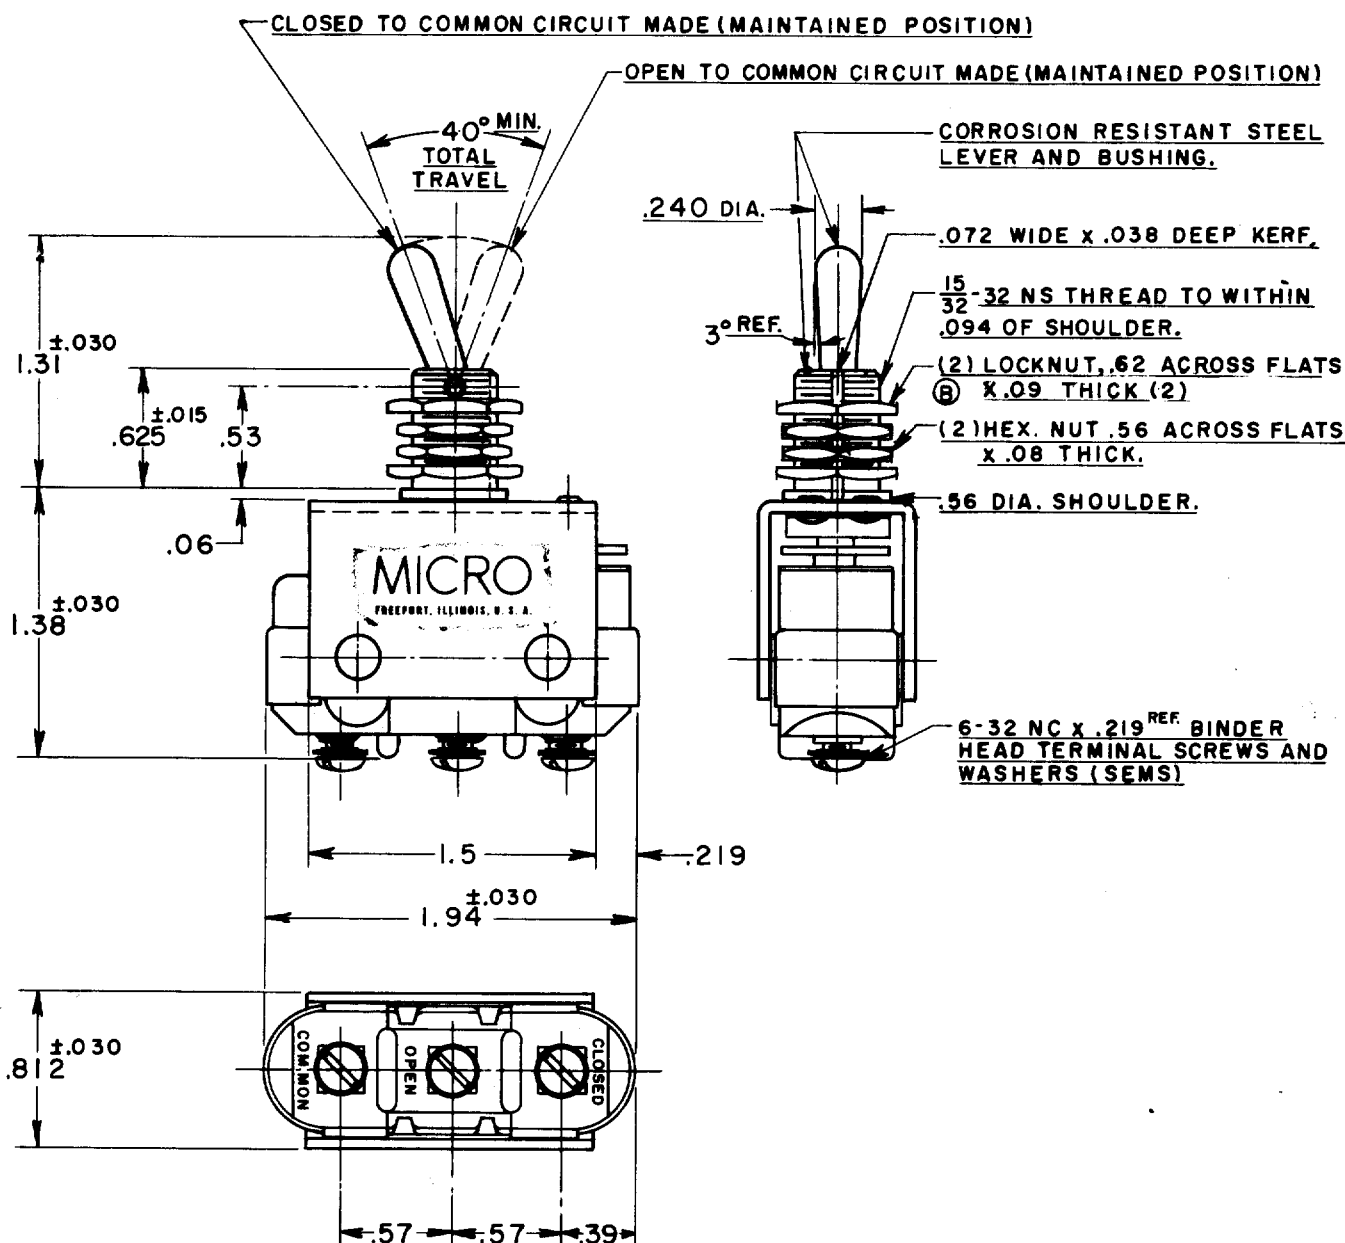

NOTE -

- 1- UNIT INCLUDES (1) CAT. LIST. IHSI BASIC SWITCH.
2- UNIT WILL PERFORM SATISFACTORILY IN TEMPERATURES TO MINUS 65°F

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA			SCALE FULL
	CONTACT ARRANGEMENT		BREAK DISTANCE	DO NOT SCALE PRINT
	S. P. D. T.		.036 MIN.	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±
	LINE VOLTAGE	INDUCTIVE LOAD	RESISTIVE LOAD	
	28 V.D.C.	10 AMP.	25 AMP.	
	SEA LEVEL - 100,000 FT			
	125 V.A.C.	1 AMP	1 AMP.	WEIGHT
SEA LEVEL - 70,000 FT				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[5AT1](#)