
3M[™] Card Connector microSD[™]

Normal Polarization, Push-Push, Surfacemount

2900 Series

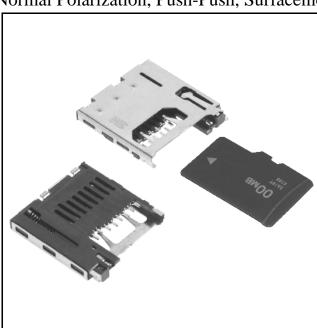

- 1.85 mm low profile height
- Small size of 14.0 mm × 14.2 mm footprint
- Smooth push–push eject mechanism
- · Card is retained when mated
- Card polarization
- Will accept a card thickness of 0.8 mm
- Mechanism prevents card from flying out upon ejection
- Card detection indicator
- Metal-shielded cover
- microSDTM specification compliant
- RoHS* compliant

TS-2197-02
Date Modified: October 31, 2006
Sheet 1 of 3

Physical

Insulation Material: High Temperature Thermoplastic

Flammability: UL 94V-0

Color: Black

Contact Material: Copper Alloy

Plating

Underplating: $50 \mu''$ [$1.27 \mu m$] min. Nickel Wiping Area: $15 \mu''$ [$0.38 \mu m$] min. Gold Termination Area: $3 \mu''$ [$0.076 \mu m$] max. Gold flash

Cover Material: Stainless Steel

Underplating: $40 \mu''$ [$1.02 \mu m$] min. Nickel

Solder Area: Gold flash **Lock Pin and Link Pin Material:** Stainless Steel

Spring Material: Copper Alloy

Plating: $30 \mu'' [0.762 \mu m] min. Nickel$

Marking: 3M Logo

Electrical

Current Rating: 0.5 AInsulation Resistance: $100 \text{ M}\Omega \text{ min.}$

Withstanding Voltage: 500 VAC for one minute

Environmental


Operating Temperature: -25°C to +85°C **Storage Temperature:** -40°C to +85°C

Process Rating: Maximum 250°C, with 40 seconds over 230°C


microSD is a trademark of SD Association in Japan.

^{*&}quot;RoHS compliant" means that the product or part does not contain any of the following substances in excess of the following maximum concentration values in any homogeneous material, unless the substance is in an application that is exempt under RoHS: (a) 0.1% (by weight) for lead, mercury, hexavalent chromium, polybrominated biphenyls or polybrominated diphenyl ethers; or (b) 0.01% (by weight) for cadmium. Unless otherwise stated by 3M in writing, this information represents 3M's knowledge and belief based upon information provided by third party suppliers to 3M.

Normal Polarization, Push-Push, Surfacemount

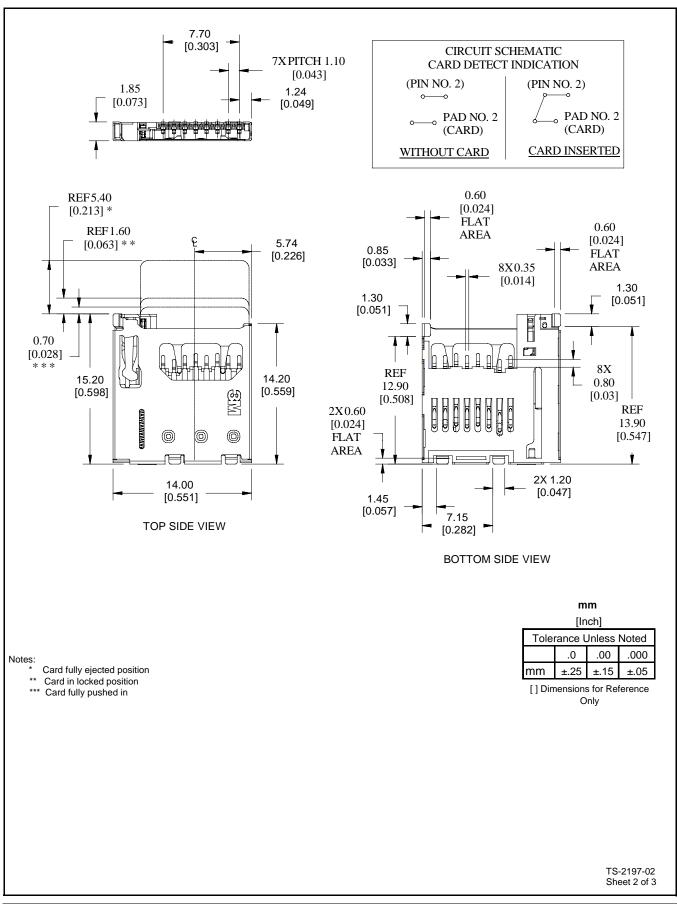

Normal Polarization, Push-Push, Surfacemount

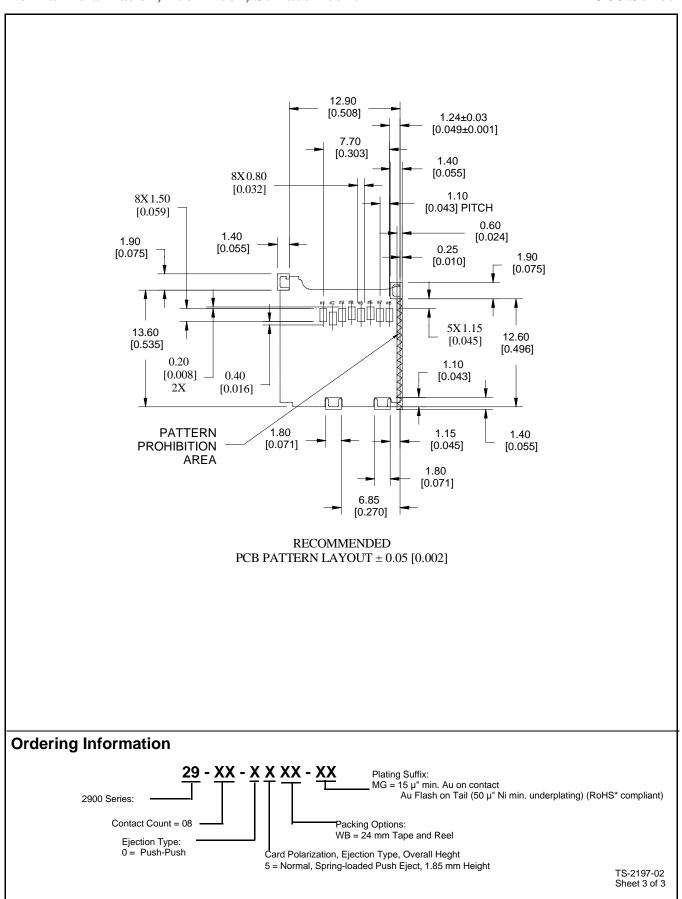

Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.



3M Electronics

6801 River Place Blvd. Austin, TX 78726-9000 800/225-5373 www.3M.com/electronics

Warranty; Limited Remedy; Limited Liability.

This product will be free from defects in material and manufacture for a period of one (1) year from the time of purchase. 3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.



Minimum 10% Post-Consumer Fiber Printed in USA.

© 3M 2006

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

3M:

2908-05WB-MG