

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0740612512

Status:


Active

Overview:

VHDM® Backplane Connector Systems

Description:

2.00mm Pitch VHDM® Single-Ended Board-to-Board Backplane Header, Vertical, 8-Row, Guide Pin Signal Module, Pin End Version, 200 Circuits, Pin Length 6.25mm. Series:74075 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm25, 4.75, 5.15 and 6.25mm

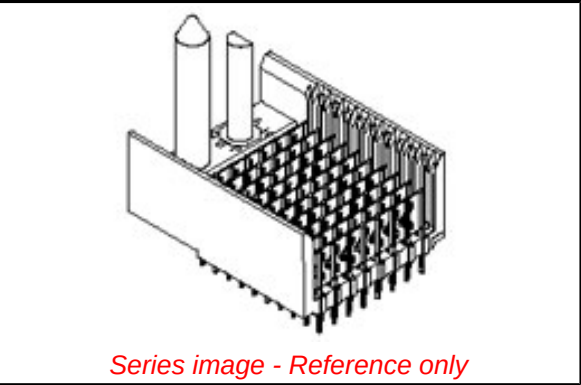

Series image - Reference only

Documents:

3D Model

Packaging Specification PK-74061-003 (PDF)

Drawing (PDF)

RoHS Certificate of Compliance (PDF)

Product Specification PS-74031-999 (PDF)

General	
Product Family	Backplane Connectors
Series	74061
Application	Backplane
Application Tooling Documents	TM-622010999
Comments	Keying Position A
Component Type	PCB Header
Overview	VHDM® Backplane Connector Systems
Product Name	VHDM®
UPC	800754816601
Physical	
Circuits (Loaded)	200
Circuits (maximum)	200
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Guide to Mating Part	Yes
Keying to Mating Part	Yes
Material - Metal	Beryllium Copper, High Performance Alloy (HPA), Stainless Steel
Material - Plating Mating	Gold
Material - Plating Termination	Tin-Lead
Material - Resin	High Temperature Thermoplastic
Net Weight	17.592/g
Number of Columns	25
Number of Pairs	Open Pin Field
Number of Rows	8
Orientation	Vertical
PC Tail Length	2.50mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.80mm
Packaging Type	Tube
Pitch - Mating Interface	2.00mm
Pitch - Termination Interface	1.00mm
Plating min - Mating	0.762µm
Plating min - Termination	0.762µm
Polarized to PCB	Yes
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	105°C max
Termination Interface: Style	Through Hole - Compliant Pin

Electrical

EU ELV

Not Relevant

EU RoHS

Not Compliant

China RoHS

REACH SVHC

Not Contained Per -

ED/21/2016 (20 June

2016)

Halogen-Free

Status

Low-Halogen

Need more information on product

environmental compliance?

Email productcompliance@molex.com

Please visit the [Contact Us](#) section for any

non-product compliance questions.

China ROHS

50 Image

ELV

Not Relevant

Search Parts in this Series

74061 Series

Mates With

74040 VHDM® Board-to-Board

Daughtercard Receptacle

Application Tooling | FAQ

Tooling specifications and manuals are

found by selecting the products below.

Crimp Height Specifications are then

contained in the Application Tooling

Specification document.

Global

Description

Product #

Insertion Module

0622020210

for Standard Shield

Signal Header, 8-

Row by 25-Wide,

50.00mm

Current - Maximum per Contact	3.0A	Signal Pin Inserter	0622015700
Data Rate	3.125 Gbps	Repair Tool	
Shield Type	Ground Plane Shield	8-Row Pin and	0622015900
Shielded	Yes	Shield Repair Tool	
Voltage - Maximum	120V AC (RMS)/DC	Insertion Module	0622020206
		for Advanced Mate	
Solder Process Data		Signal Header, 6-	
Lead-freeProcess Capability	N/A	Row by 25-Wide,	
		50.00mm	
Material Info		8-Row Shield	0622016100
		Extraction Tool	
Reference - Drawing Numbers			
Packaging Specification	PK-74061-003		
Product Specification	PS-74031-999		
Sales Drawing	SD-74061-002		
Note: HDM, HDM+, VHDM, VHDM-HSD and GbX are trademarks or registered trademarks of Amphenol TCS.			

This document was generated on 09/30/2016

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[74061-2512](#)