
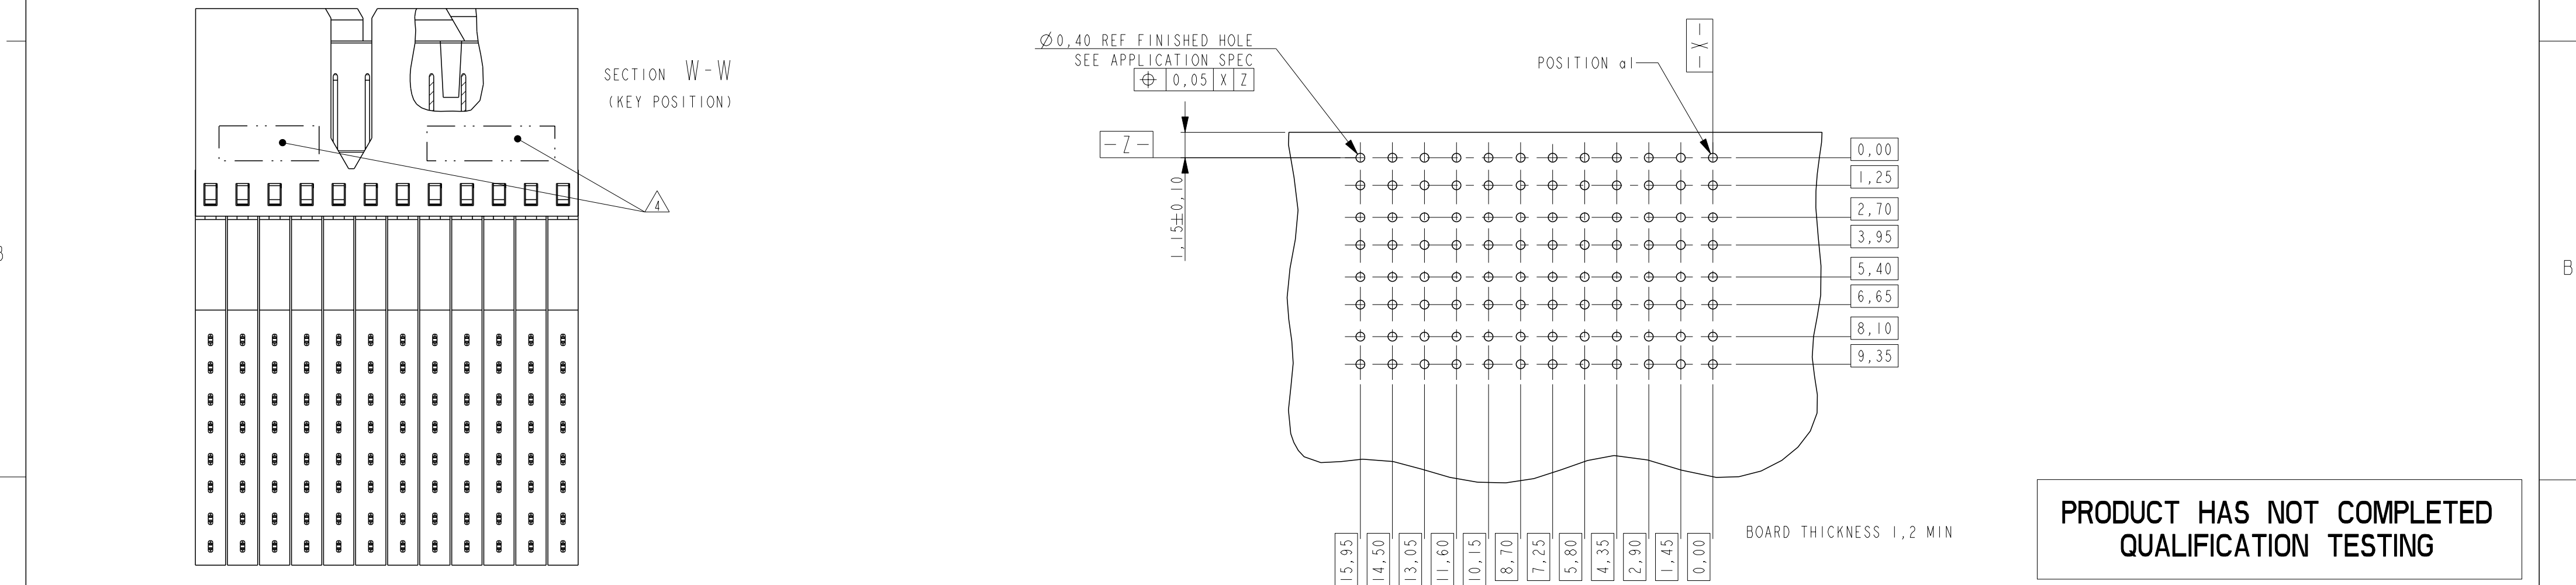


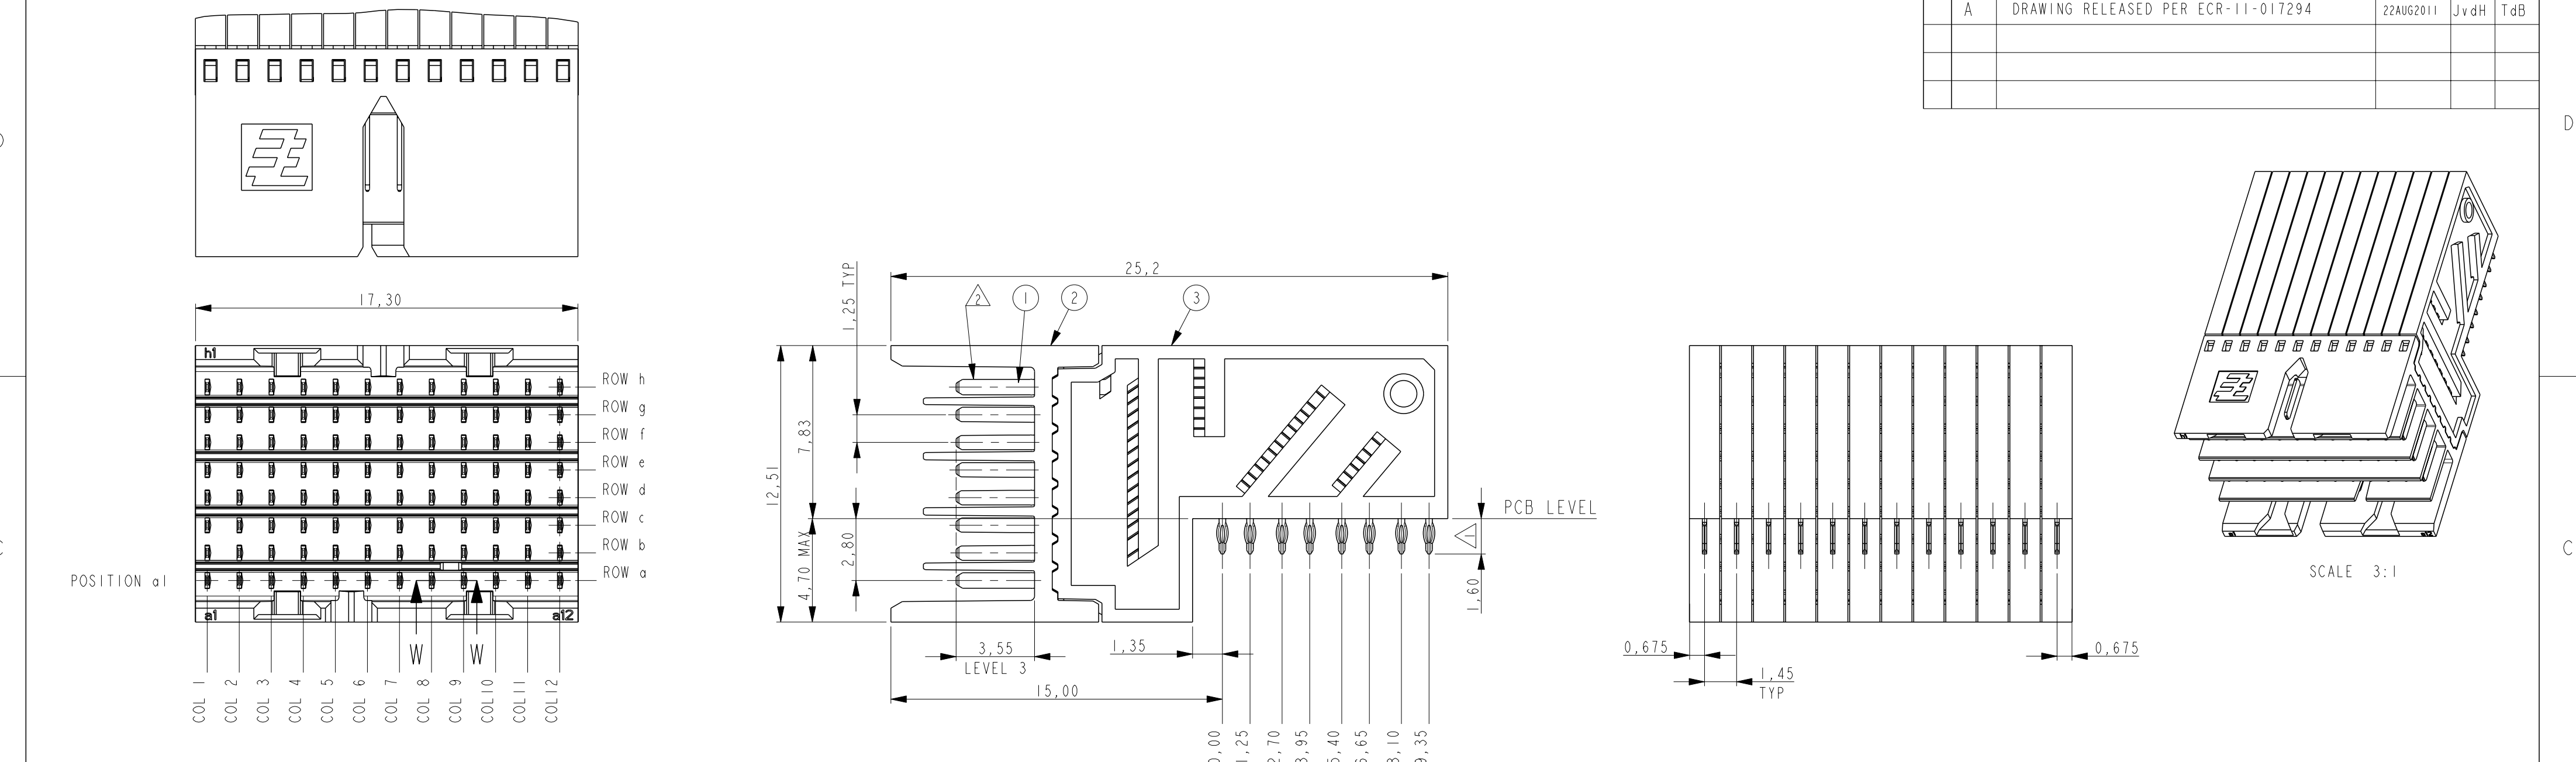

NOTES:

1

PLATING: 0,5µm MIN. TIN OVER NICKEL.

2

PLATING:

PARTNUMBER	PERFORMANCE LEVEL
2042139-1	PERFORMANCE LEVEL 1: CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III: UNCONTROLLED ENVIRONMENT APPLICATIONS. SEE PRODUCT SPEC 108-19353
2042139-2	PERFORMANCE LEVEL 2: CONFORMS TO ALL TESTING ACCORDING PRODUCT SPEC 108-19320, -250 MATING CYCLES, 4 DAYS MIXED GAS TEST PER IEC 60068-2-60 METHOD I

3 CONSULT APPLICATION SPEC OR CONTACT TE CONNECTIVITY FOR PERMISSIBLE CONTACT ASSIGNMENTS.

4

CONNECTOR MARKED WITH PARTNUMBER AND DATE CODE.

5 FOR PC-BOARD ROUTING RECOMMENDATIONS SEE SPEC 114-19140

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±

1 PLC ±

2 PLC ±

3 PLC ±

4 PLC ±

ANGLES ±

FINISH

MATERIAL

-

DWN
RA
15-Apr-09

CHK
RA
15-Apr-09

APVD
-

PRODUCT SPEC
SEE NOTE 1

APPLICATION SPEC
114-19106

WEIGHT
-

CUSTOMER DRAWING

3	OVERMOLD	PBT 20% GF GREY
2	HOUSING	LCP 30% GF NATURAL
1	CONTACT	COPPER ALLOY

ITEM NO. DESCRIPTION MATERIAL

TE Connectivity

NAME
RIGHT ANGLE MALE CONNECTOR
Z-PACK Slim UHD Common Speed

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-2042139	-

SCALE 5:1 SHEET 1 OF 1 REV A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2042139-1](#)