


REV. 6
DCO 102710

| | |
|-----------------|---------------|
| COIL: @ 25°C | |
| RESISTANCE | 300 OHMS ±10% |
| NOMINAL VOLTAGE | 26.5 VDC |
| MUST OPERATE | 13.0 VDC |
| MUST RELEASE | 2.3 VDC |

| | |
|--------------|-----------------------------|
| ENVIRONMENT: | |
| VIBRATION | 10 CPS TO 2000 CPS @ 20 g's |
| SHOCK | 50 g's 11 MS. DURATION |
| TEMPERATURE | -65 °C TO +125 °C |

NOTES: OPERATE & RELEASE 15 MS MAX
 OPERATE BOUNCE 5 MS MAX.
 RELEASE BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET

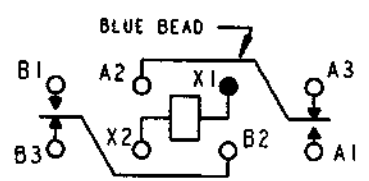

TERMINAL VIEW

| | |
|-----------------|---------------------------------|
| CONTACT RATING: | 10 AMPS 28 VDC |
| | 5 AMPS 115 VAC/400 Hz RESISTIVE |
| | 50,000 OPERATIONS |

DR. BSH 8/17/01 CK. TLG 8-17-01



CUST. OPL
 CUST. NO. M5757/23-002 REV.

"07" RELAY

B07D992BZ2-0050

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[B07D992BZ2-0050](#)