
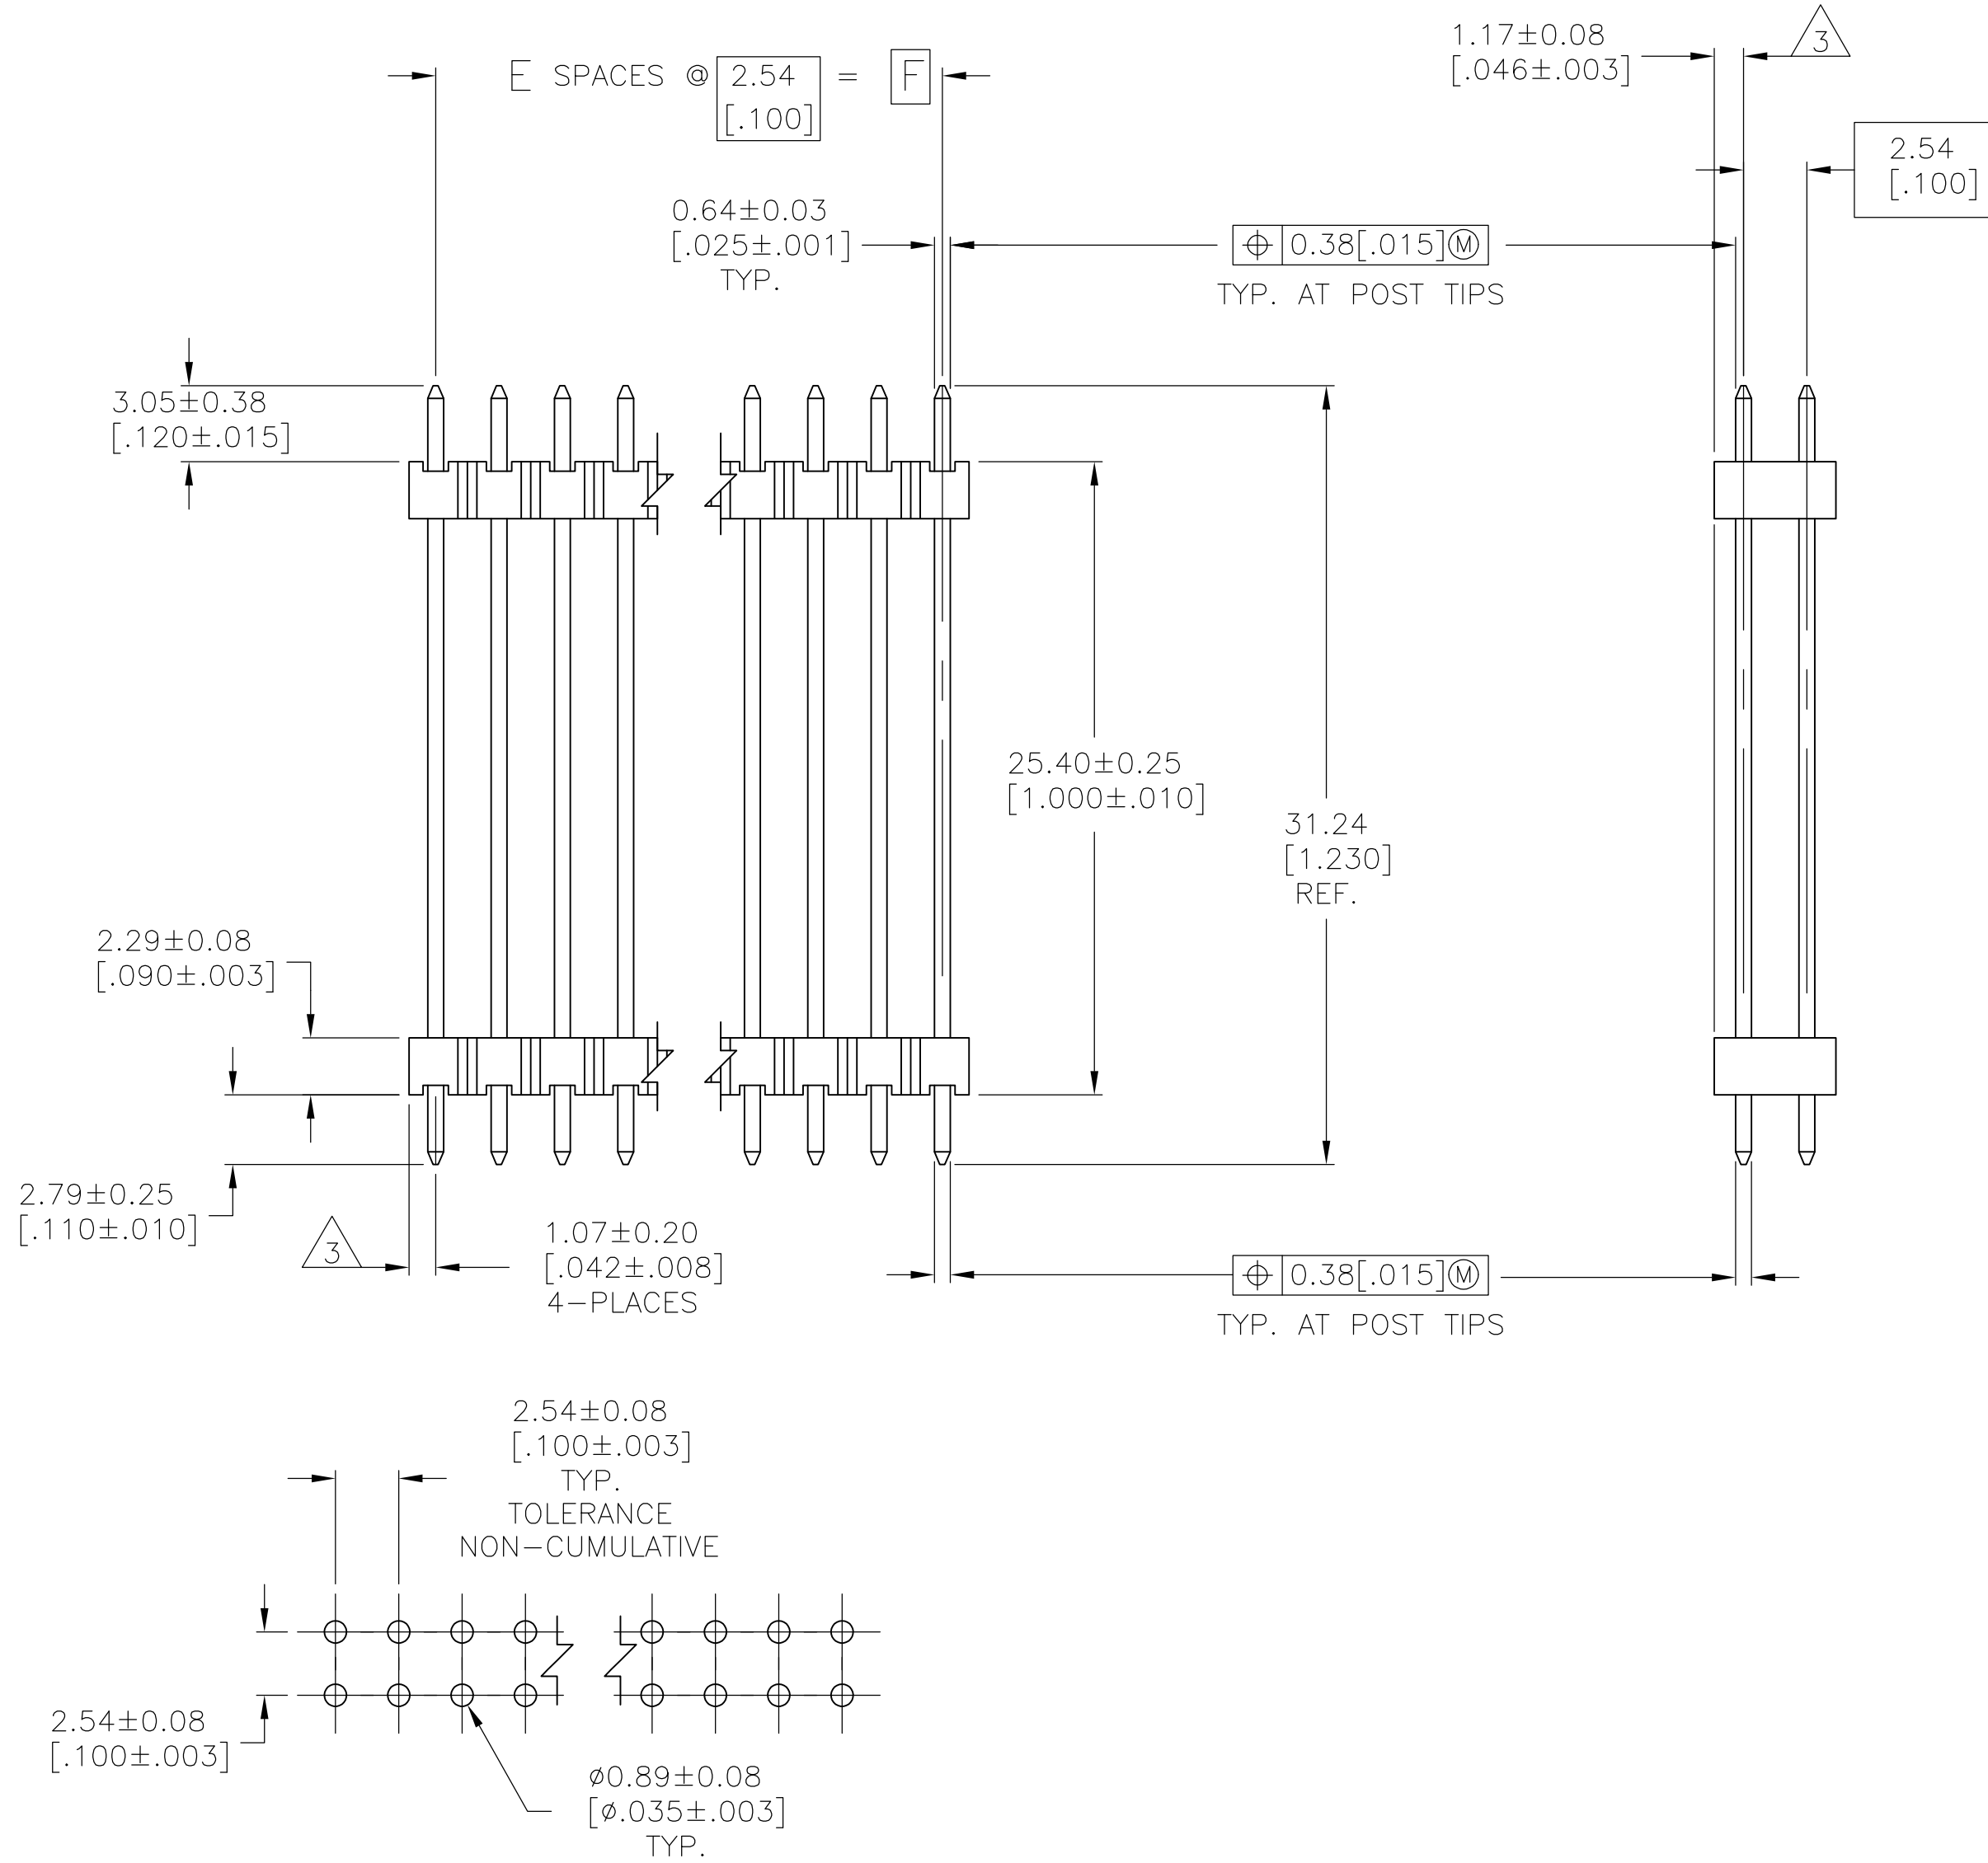
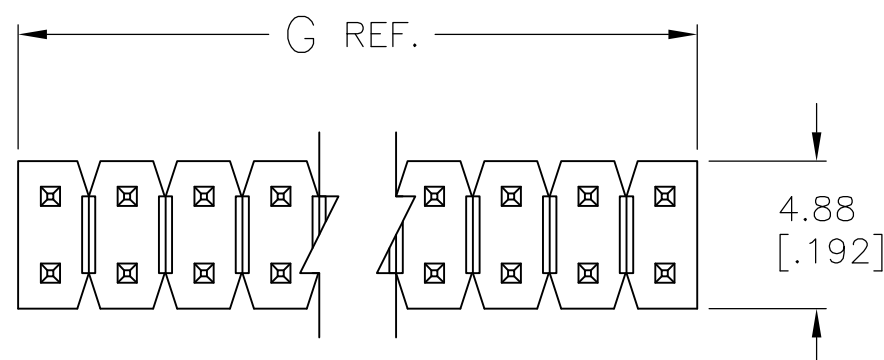










LOC	DIST	REVISIONS					
AD	39	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A1	REVISED PER ECO-11-004820	11MAR11	RK	HMR



RECOMMENDED HOLE LAYOUT

1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
4. HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
5. FINISH: 0.00254-0.00508 [.000100-.000200] BRIGHT TIN-LEAD OVER 0.00127 [.000050] NICKEL ENTIRE POST.
6. FINISH: 0.00254-0.00508 [.000100-.000200] MATTE TIN OVER 0.00127 [.000050] NICKEL ENTIRE POST.

	101.19 [3.984]	99.06 [3.900]	39	80	9-146502-0
	98.65 [3.884]	96.52 [3.800]	38	78	8-146502-9
	96.11 [3.784]	93.98 [3.700]	37	76	8-146502-8
	93.57 [3.684]	91.44 [3.600]	36	74	8-146502-7
	91.03 [3.584]	88.90 [3.500]	35	72	8-146502-6
	88.49 [3.484]	86.36 [3.400]	34	70	8-146502-5
	85.95 [3.384]	83.82 [3.300]	33	68	8-146502-4
	83.41 [3.284]	81.28 [3.200]	32	66	8-146502-3
	80.87 [3.184]	78.74 [3.100]	31	64	8-146502-2
	78.33 [3.084]	76.20 [3.000]	30	62	8-146502-1
	75.79 [2.984]	73.66 [2.900]	29	60	8-146502-0
	73.25 [2.884]	71.12 [2.800]	28	58	7-146502-9
	70.71 [2.784]	68.58 [2.700]	27	56	7-146502-8
	68.17 [2.684]	66.04 [2.600]	26	54	7-146502-7
	65.63 [2.584]	63.50 [2.500]	25	52	7-146502-6
	63.09 [2.484]	60.96 [2.400]	24	50	7-146502-5
	60.55 [2.384]	58.42 [2.300]	23	48	7-146502-4
	58.01 [2.284]	55.88 [2.200]	22	46	7-146502-3
	55.47 [2.184]	53.34 [2.100]	21	44	7-146502-2
	52.93 [2.084]	50.80 [2.000]	20	42	7-146502-1
	50.39 [1.984]	48.26 [1.900]	19	40	7-146502-0
	47.85 [1.884]	45.72 [1.800]	18	38	6-146502-9
	45.31 [1.784]	43.18 [1.700]	17	36	6-146502-8
	42.77 [1.684]	40.64 [1.600]	16	34	6-146502-7
	40.23 [1.584]	38.10 [1.500]	15	32	6-146502-6
	37.69 [1.484]	35.56 [1.400]	14	30	6-146502-5
	35.15 [1.384]	33.02 [1.300]	13	28	6-146502-4
	32.61 [1.284]	30.48 [1.200]	12	26	6-146502-3
	30.07 [1.184]	27.94 [1.100]	11	24	6-146502-2
	27.53 [1.084]	25.40 [1.000]	10	22	6-146502-1
	24.99 [.984]	22.86 [.900]	9	20	6-146502-0
	22.45 [.884]	20.32 [.800]	8	18	5-146502-9
	19.91 [.784]	17.78 [.700]	7	16	5-146502-8
	17.37 [.684]	15.24 [.600]	6	14	5-146502-7
	14.83 [.584]	12.70 [.500]	5	12	5-146502-6
	12.29 [.484]	10.16 [.400]	4	10	5-146502-5
	9.75 [.384]	7.62 [.300]	3	8	5-146502-4
	7.21 [.284]	5.08 [.200]	2	6	5-146502-3

	101.19 [3.984]	99.06 [3.900]	39	80	4-146502-0
	98.65 [3.884]	96.52 [3.800]	38	78	3-146502-9
	96.11 [3.784]	93.98 [3.700]	37	76	3-146502-8
	93.57 [3.684]	91.44 [3.600]	36	74	3-146502-7
	91.03 [3.584]	88.90 [3.500]	35	72	3-146502-6
	88.49 [3.484]	86.36 [3.400]	34	70	3-146502-5
	85.95 [3.384]	83.82 [3.300]	33	68	3-146502-4
	83.41 [3.284]	81.28 [3.200]	32	66	3-146502-3
	80.87 [3.184]	78.74 [3.100]	31	64	3-146502-2
	78.33 [3.084]	76.20 [3.000]	30	62	3-146502-1
	75.79 [2.984]	73.66 [2.900]	29	60	3-146502-0
	73.25 [2.884]	71.12 [2.800]	28	58	2-146502-9
	70.71 [2.784]	68.58 [2.700]	27	56	2-146502-8
	68.17 [2.684]	66.04 [2.600]	26	54	2-146502-7
	65.63 [2.584]	63.50 [2.500]	25	52	2-146502-6
	63.09 [2.484]	60.96 [2.400]	24	50	2-146502-5
	60.55 [2.384]	58.42 [2.300]	23	48	2-146502-4
	58.01 [2.284]	55.88 [2.200]	22	46	2-146502-3
	55.47 [2.184]	53.34 [2.100]	21	44	2-146502-2
	52.93 [2.084]	50.80 [2.000]	20	42	2-146502-1
	50.39 [1.984]	48.26 [1.900]	19	40	2-146502-0
	47.85 [1.884]	45.72 [1.800]	18	38	1-146502-9
	45.31 [1.784]	43.18 [1.700]	17	36	1-146502-8
	42.77 [1.684]	40.64 [1.600]	16	34	1-146502-7
	40.23 [1.584]	38.10 [1.500]	15	32	1-146502-6
	37.69 [1.484]	35.56 [1.400]	14	30	1-146502-5
	35.15 [1.384]	33.02 [1.300]	13	28	1-146502-4
	32.61 [1.284]	30.48 [1.200]	12	26	1-146502-3
	30.07 [1.184]	27.94 [1.100]	11	24	1-146502-2
	27.53 [1.084]	25.40 [1.000]	10	22	1-146502-1
	24.99 [.984]	22.86 [.900]	9	20	1-146502-0
	22.45 [.884]	20.32 [.800]	8	18	146502-9
	19.91 [.784]	17.78 [.700]	7	16	146502-8
	17.37 [.684]	15.24 [.600]	6	14	146502-7
	14.83 [.584]	12.70 [.500]	5	12	146502-6
	12.29 [.484]	10.16 [.400]	4	10	146502-5
	9.75 [.384]	7.62 [.300]	3	8	146502-4
	7.21 [.284]	5.08 [.200]	2	6	146502-3
	4.67 [.184]	2.54 [.100]	1	4	146502-2
	2.13 [.084]	-	-	2	146502-1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG. 11-NOV-96 CHK. BRANDBERG G. DUBNICZKI APVD. G. DUBNICZKI 11-NOV-96		 TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 P L C ± 1 P L C ± 2 P L C ± 0.51 [0.02] 3 P L C ± 0.127 [0.005] 4 P L C ± 0.0127 [0.0005] ANGLES ±		NAME HEADER ASSEMBLY, MOD II, STACKING, DOUBLE ROW, .025 SO. POST, UNSHROUDED	
MATERIAL  SEE TABLE		PRODUCT SPEC APPLICATION SPEC WEIGHT —		SIZE CAGE CODE DRAWING NO A1 00779 C 146502	
		CUSTOMER DRAWING		RESTRICTED TO — SCALE 4:1 SHEET 1 OF 1 REV A	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-146502-5](#)