
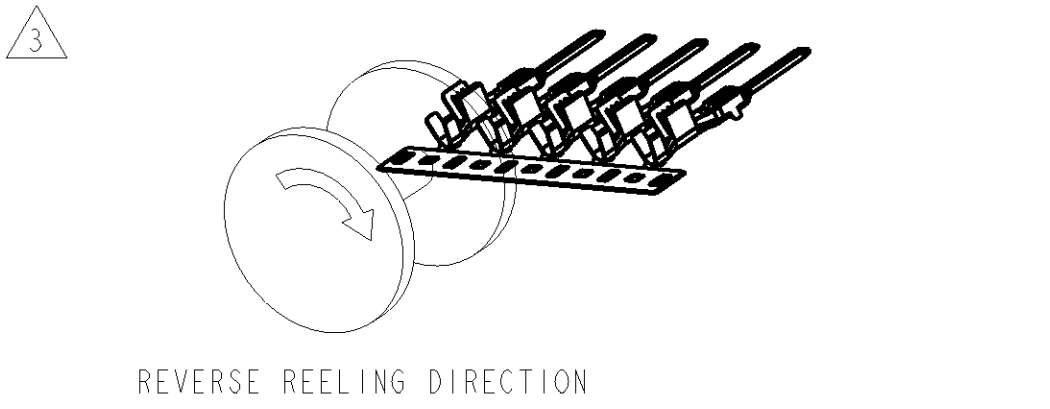
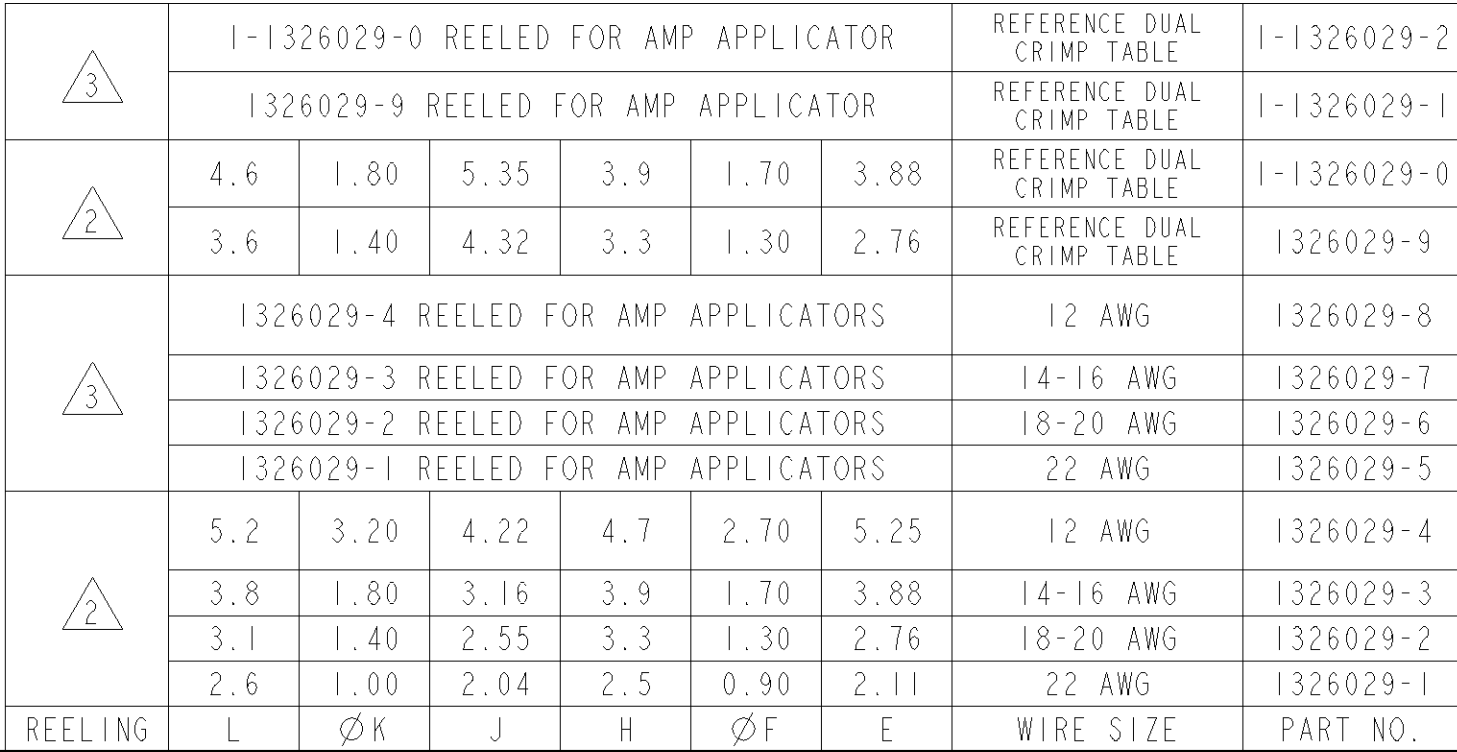
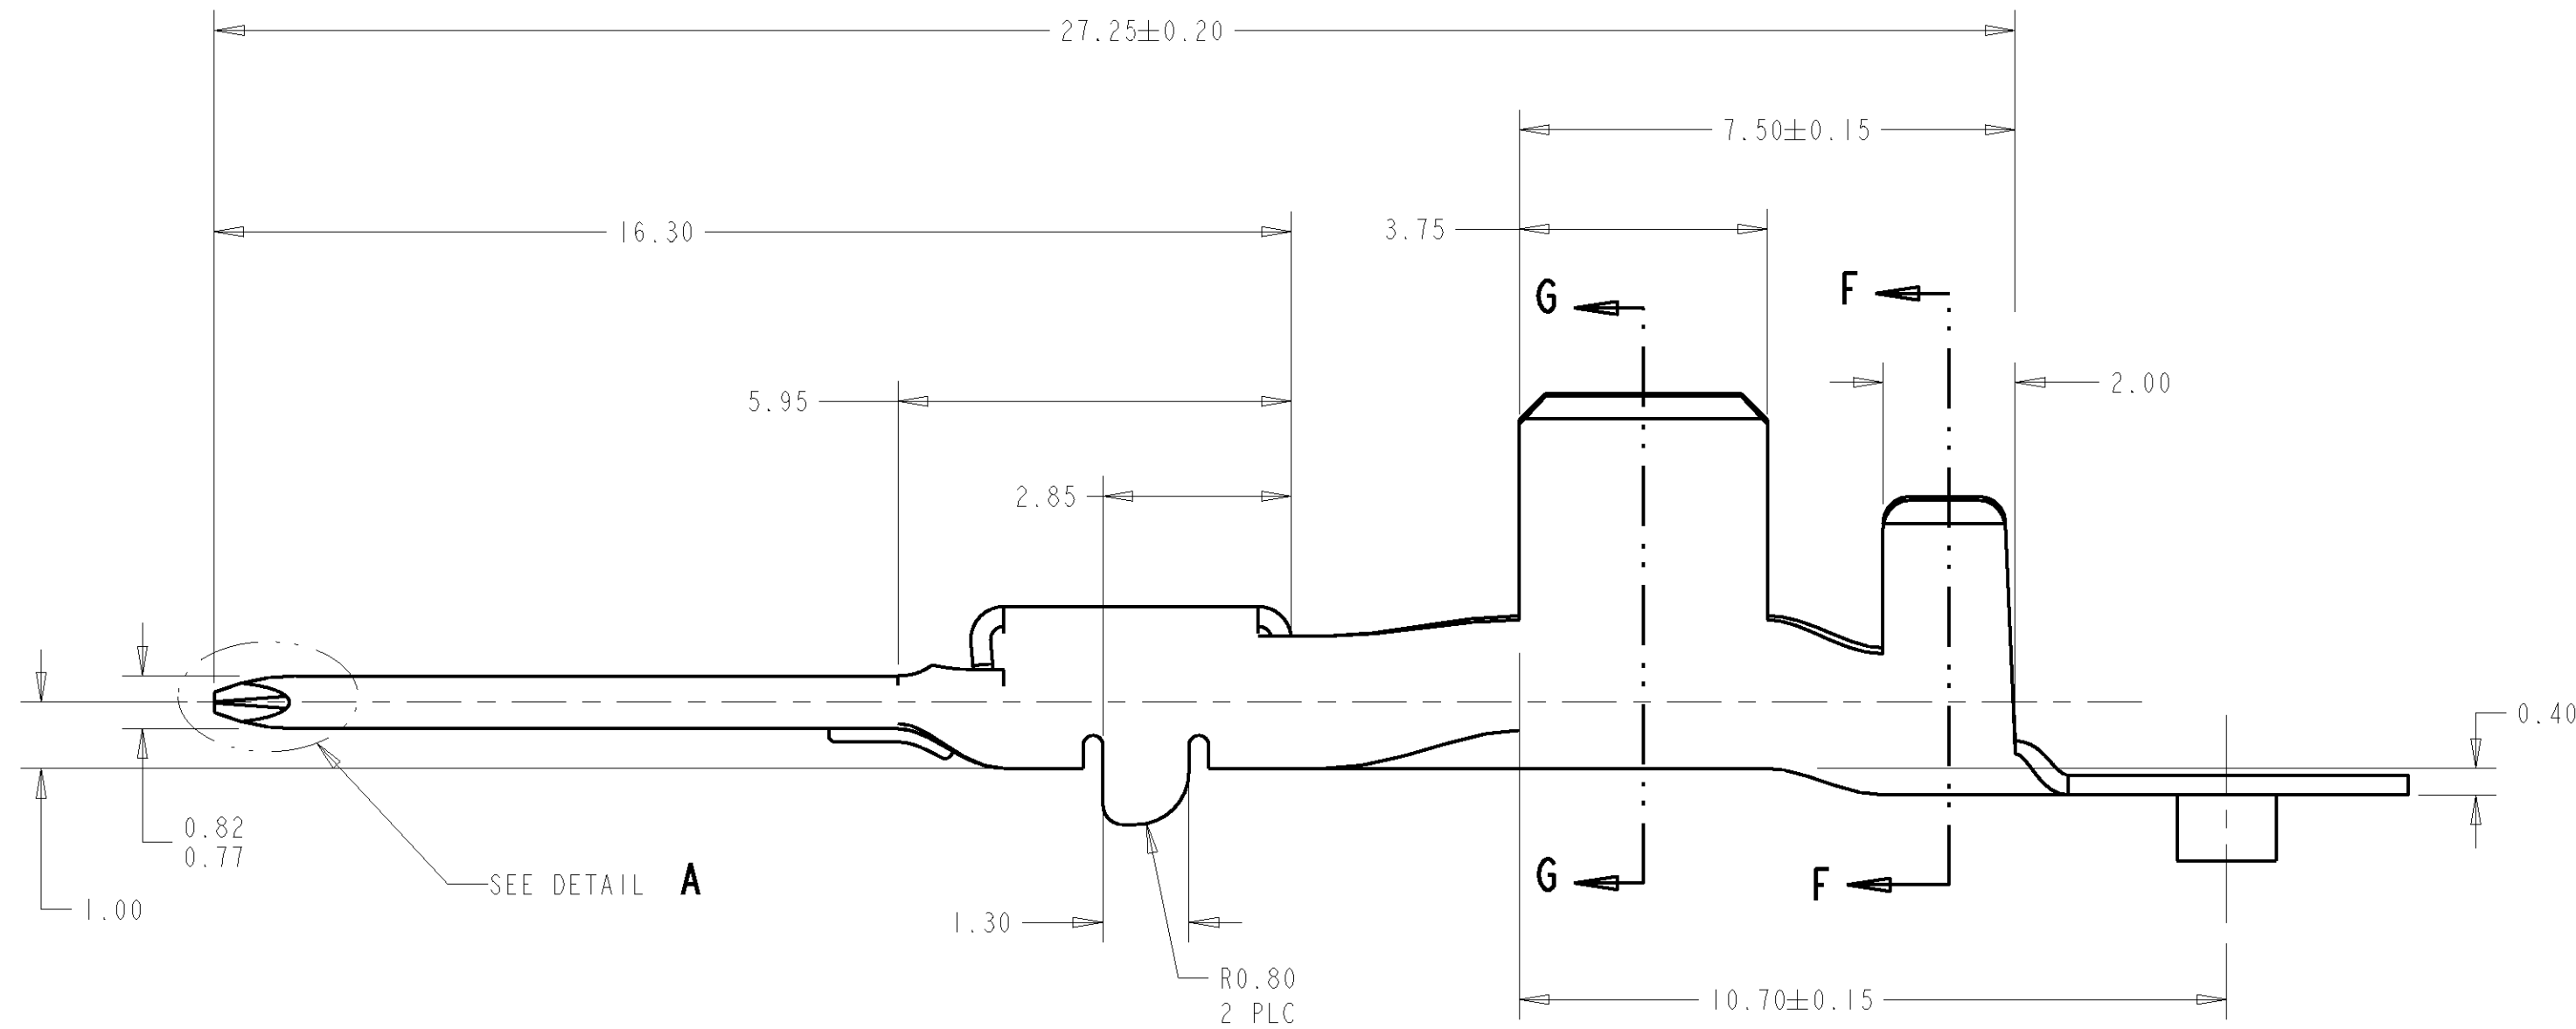


 MATERIAL: 0.30 THICK COPPER ALLOY, PREPLATED
WITH 0.0008 MINIMUM THICK MATTE TIN (ELV COMPLIANT).

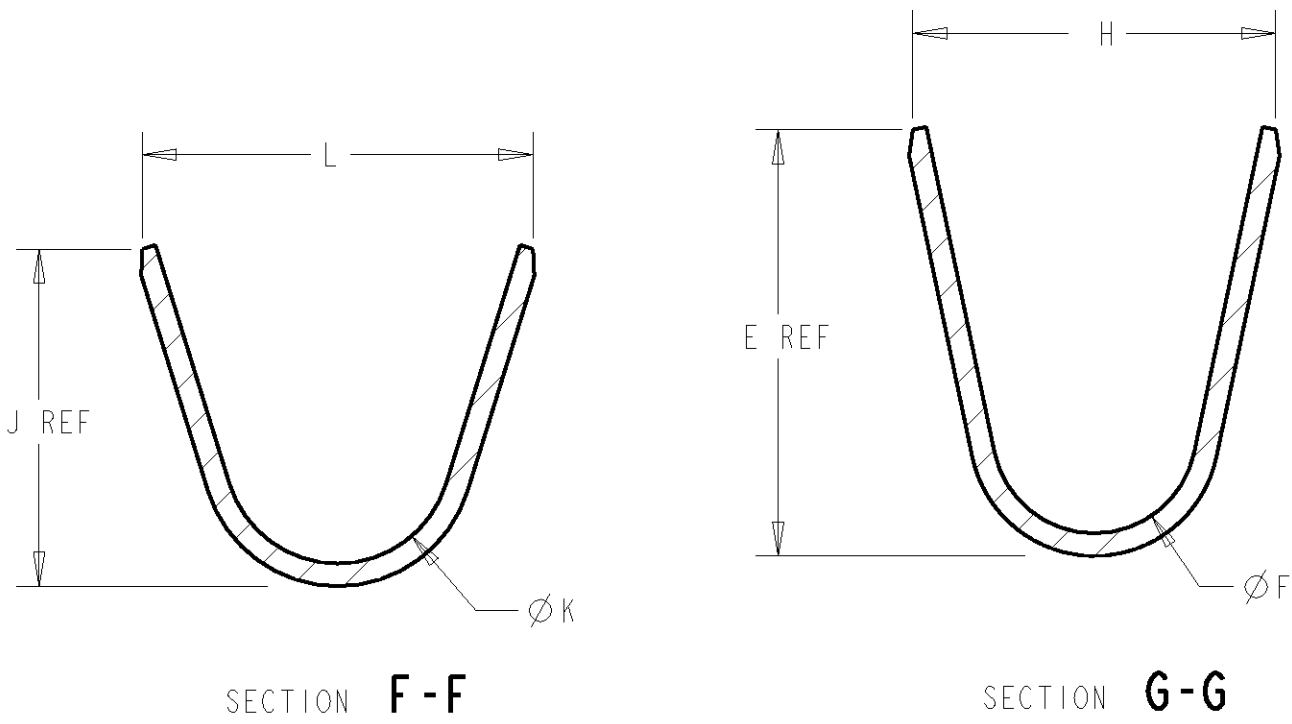

5. QUALIFICATION OF THE CRIMP APPLICATION TOOLING SHALL BE CONTROLLED BY THE REQUIREMENTS ESTABLISHED UNDER USCAR 21.

6. LOOSE END SPLICING TO BE USED.

AMP 4805 REV 31MAR2000

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1326029-1](#)