

## Sensor/actuator cable - SAC-3P-M8Y/2X10,0-PUR - 1458651

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sensor/actuator cable, 3-position, PUR halogen-free, black-gray RAL 7021, Plug straight M8, on free cable end and free cable end, cable length: 10 m

RoHS

### Key Commercial Data

|              |                                                                                                         |
|--------------|---------------------------------------------------------------------------------------------------------|
| Packing unit | 1 pc                                                                                                    |
| GTIN         | <br>4 046356 638005 |
| GTIN         | 4046356638005                                                                                           |

### Technical data

#### Dimensions

|                 |      |
|-----------------|------|
| Length of cable | 10 m |
|-----------------|------|

#### Ambient conditions

|                                 |                                  |
|---------------------------------|----------------------------------|
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |
| Degree of protection            | IP65                             |
|                                 | IP67                             |
|                                 | IP68                             |

#### General

|                       |                              |
|-----------------------|------------------------------|
| Rated current at 40°C | 4 A                          |
| Rated voltage         | 48 V AC                      |
|                       | 60 V DC                      |
| Number of positions   | 3                            |
| Insulation resistance | ≥ 100 MΩ                     |
| Coding                | A - standard                 |
| Standards/regulations | M8 connector IEC 61076-2-104 |
| Status display        | No                           |
| Overvoltage category  | II                           |
| Degree of pollution   | 3                            |

# Sensor/actuator cable - SAC-3P-M8Y/2X10,0-PUR - 1458651

## Technical data

### General

|        |                   |
|--------|-------------------|
| Torque | 0.2 Nm (M8 knurl) |
|--------|-------------------|

### Material

|                                        |                                             |
|----------------------------------------|---------------------------------------------|
| Flammability rating according to UL 94 | HB                                          |
| Contact material                       | CuSn                                        |
| Contact surface material               | Ni/Au                                       |
| Contact carrier material               | TPU GF                                      |
| Material of grip body                  | TPU, hardly inflammable, self-extinguishing |
| Material, knurls                       | Zinc die-cast, nickel-plated                |
| Sealing material                       | NBR                                         |

### Standards and Regulations

|                                        |                 |
|----------------------------------------|-----------------|
| Standard designation                   | M8 connector    |
| Standards/regulations                  | IEC 61076-2-104 |
| Flammability rating according to UL 94 | HB              |

### Cable

|                                               |                             |
|-----------------------------------------------|-----------------------------|
| Cable type                                    | PUR halogen-free black      |
| Cable type (abbreviation)                     | PUR                         |
| Cable abbreviation                            | Li9Y11Y-HF                  |
| UL AWM style                                  | 20549                       |
| Conductor cross section                       | 3x 0.25 mm <sup>2</sup>     |
| AWG signal line                               | 24                          |
| Conductor structure signal line               | 32x 0.10 mm                 |
| Core diameter including insulation            | 1.17 mm ±0.02 mm            |
| Thickness, insulation                         | ≥ 0.21 mm (Core insulation) |
| Wire colors                                   | brown, blue, black          |
| Overall twist                                 | 3 wires, twisted            |
| Length of twist, overall twist                | 40 mm                       |
| External sheath, color                        | black-gray RAL 7021         |
| Outer sheath thickness                        | approx. 0.5 mm              |
| External cable diameter D                     | 3.6 mm ±0.15 mm             |
| Smallest bending radius, fixed installation   | 18 mm                       |
| Smallest bending radius, movable installation | 36 mm                       |
| Number of bending cycles                      | 10000000                    |
| Bending radius                                | 44 mm                       |
| Traversing path                               | 10 m                        |
| Traversing rate                               | 3 m/s                       |
| Acceleration                                  | 10 m/s <sup>2</sup>         |
| Cable weight                                  | 18 kg/km                    |
| Outer sheath, material                        | PUR                         |
| Material conductor insulation                 | PP                          |

## Sensor/actuator cable - SAC-3P-M8Y/2X10,0-PUR - 1458651

### Technical data

#### Cable


|                                 |                                                                     |
|---------------------------------|---------------------------------------------------------------------|
| Conductor material              | Bare Cu litz wires                                                  |
| Insulation resistance           | $\geq 100 \text{ G}\Omega \cdot \text{km}$ (at 20 °C)               |
| Conductor resistance            | $\leq 78 \text{ }\Omega/\text{km}$ (at 20 °C)                       |
| Nominal voltage, cable          | $\leq 300 \text{ V}$                                                |
| Test voltage, cable             | $\geq 3000 \text{ V}$                                               |
| Special properties              | Flexible cable conduit capable                                      |
|                                 | Silicone-free                                                       |
|                                 | Free of substances which would hinder coating with paint or varnish |
| Flame resistance                | in accordance with UL 758/1581 FT2                                  |
|                                 | DIN EN 60332-2-2 (20 s)                                             |
| Halogen-free                    | in accordance with DIN VDE 0472 part 815                            |
| Resistance to oil               | in accordance with DIN EN 60811-2-1                                 |
| Other resistance                | hydrolysis and microbe resistant                                    |
|                                 | Highly resistant to acids, alkaline solutions and solvents          |
|                                 | Resistant to salt water                                             |
|                                 | partly UV-resistant in accordance with DIN EN ISO 4892-2-A          |
| Ambient temperature (operation) | -40 °C ... 80 °C (cable, fixed installation)                        |
|                                 | -25 °C ... 80 °C (cable, flexible installation)                     |

#### Environmental Product Compliance

|            |                                                                                                     |
|------------|-----------------------------------------------------------------------------------------------------|
|            | Lead 7439-92-1                                                                                      |
| China RoHS | Environmentally Friendly Use Period = 50                                                            |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |


### Drawings

Schematic diagram



Pin assignment M8 plug, 4-pos., view male side


Cable cross section



PUR halogen-free black [PUR]


Sensor/actuator cable - SAC-3P-M8Y/2X10,0-PUR - 1458651

Dimensional drawing

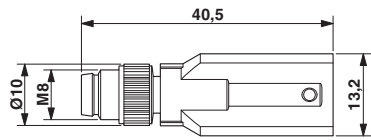


Plug M8 x 1, Y-distributor

Circuit diagram

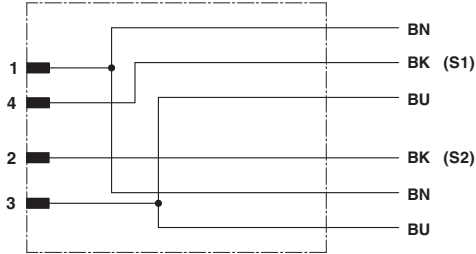

Contact assignment of the M8 Y distributor

Schematic diagram



Alignment of the connector pin assignment

Approvals

Approvals

Approvals

UL Listed / cUL Listed / EAC / cULus Listed

Ex Approvals

Approval details

|                    |                                                                                     |                                                                                                                                                       |               |
|--------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| UL Listed          |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 221474 |
| Nominal voltage UN |                                                                                     | 30 V                                                                                                                                                  |               |
| Nominal current IN |                                                                                     | 4 A                                                                                                                                                   |               |

|                    |                                                                                     |                                                                                                                                                       |               |
|--------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| cUL Listed         |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 221474 |
| Nominal voltage UN |                                                                                     | 30 V                                                                                                                                                  |               |
| Nominal current IN |                                                                                     | 4 A                                                                                                                                                   |               |

## Sensor/actuator cable - SAC-3P-M8Y/2X10,0-PUR - 1458651

### Approvals

EAC



RU C-  
DE.AI30.B.00767

cULus Listed



Phoenix Contact 2019 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>