
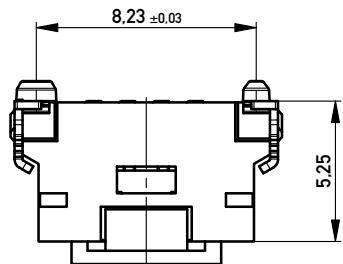


Anforderungsstufe 1
Performance Level 1


Kontaktbereich vergoldet
Mating Area gold plating

Anschlussbereich verzinkt 4-6 µm
Terminal Area 4-6 µm tin plating





Koplanarität der Anschlüsse ≤ 0,1 mm
Coplanarity Area of Termination ≤ 0,1 mm

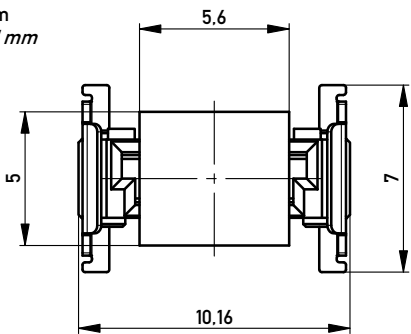


Leiterplatten-Layout für SMT
PCB-Layout for SMT

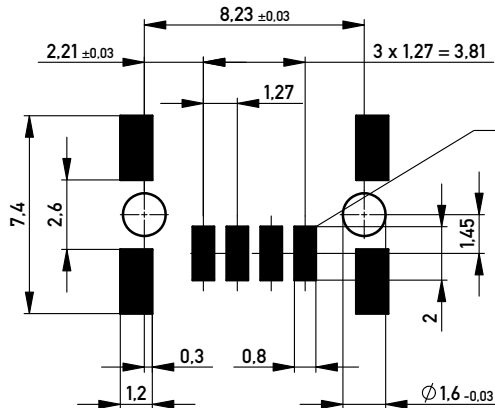


Kontaktbezeichnung bei Pin 1
contact marking at pin 1

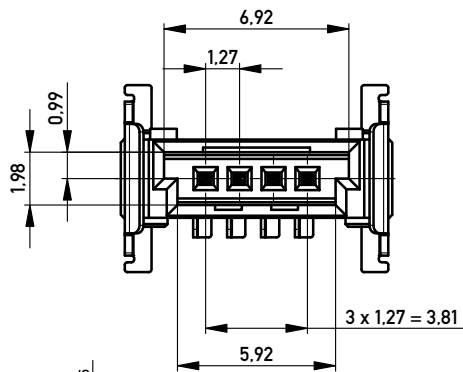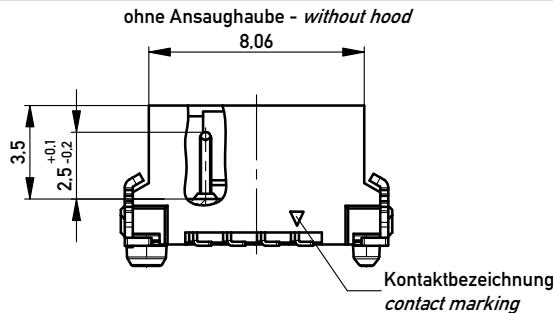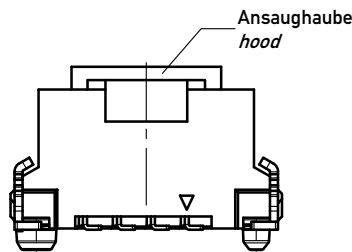

Verpackt in Gurtverpackung
Tape on Reel Packaging
Verpackungseinheit: 650 Stück
Packaging unit: 650 pcs



Abspulrichtung - Reel off Direction

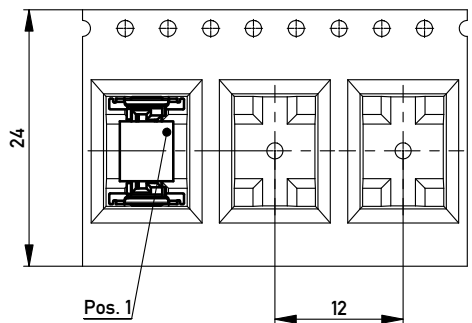

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 14004 to be observed.

Information:				Tolerances		 All Dimensions in mm		Scale 5:1					
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.				Designation					
								M 1.27 SRC P, 4-polig BA1					
d				03.04.2013				 www.ERNI.com		284697		I	
Index		Date				A3							
								Class		SRCP			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[284697](#)