



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
E	B		BA1	REVISED PER ECO-11-005150	28MAR2011	RK	HMR

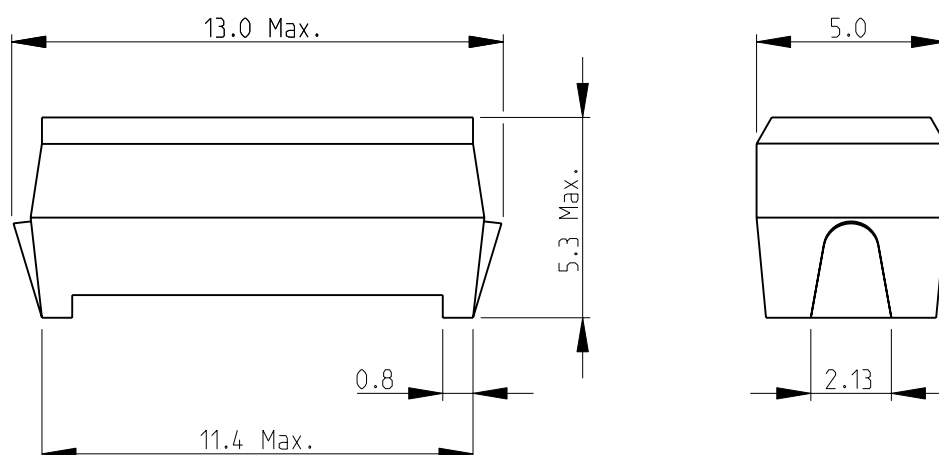


1 PACKAGING: SUPPLIED TAPED AND REELED ON 13" REELS IN QUANTITIES OF 1500 PIECES

2 FOR FURTHER INFORMATION SEE DATA SHEET FOR 3615 SERIES-HIGH CURRENT INDUCTOR SMD

RECOMMENDED LAND PATTERN

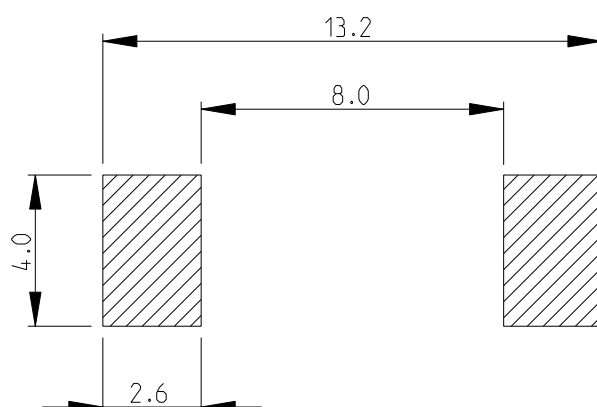

RoHS Compliant

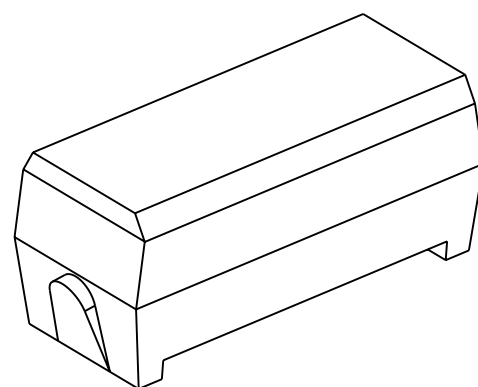

2008


RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.

BY -

© COPYRIGHT 2008

DIMENSIONS:		DWN	13-NOV-08	MATERIAL		FINISH	
mm		SUBHASH.M		-		-	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK	13-NOV-08	TE Connectivity			
		PRAKASH.S					
		APVD	13-NOV-08				
0 PLC ±0.2		STEPHEN.P		NAME HIGH CURRENT INDUCTOR SMD SERIES 3615			
1 PLC ±0.1		PRODUCT SPEC					
2 PLC ±-		-					
3 PLC ±-		APPLICATION SPEC		SIZECAGE CODEDRAWING NORESTRICTED TO			
4 PLC ±-		-					
ANGLES ±5°							
		WEIGHT	0.7g max.	A 400779		©- 1624097	
		CUSTOMER DRAWING					
				SCALE	5:1	SHEET	1 OF 1
						REV	BA1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3615A471K](#)