



Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
Wire Size	2/0 STR/FLEX
Wire Type	Stranded Copper: Class B & C Compact, Class G, H, I, K, M, Locomotive
Wire Strip Length	1-9/16 in.
Stud Size	3/8 in.
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90° C
C.S.A Certified Wire Connector	Yes
Panduit Color Code on Barrel	BLACK
Panduit Die Index No. on Barrel	P45
Alternate Industry Die Index No. () on Barrel	(13)

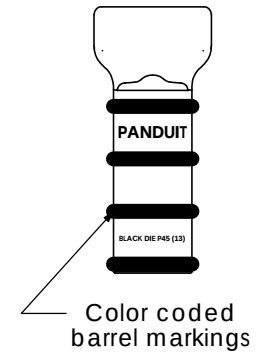

Technical drawing of a wire probe assembly. The drawing shows a cylindrical body with a conical tip. Key dimensions and labels include:

- Overall height: $.96 \pm .04$
- Overall width: $.39 \pm .04$
- Distance from left face to center of first hole: $1.00 \pm .02$
- Distance from center of first hole to center of second hole: $.41 \pm .02$ DIA (2) PLS
- Labels on the body: PANDUIT, 2/0 STR/FLEX, LCCX2/0-38DF
- Label for the conical tip: Wire inspection window

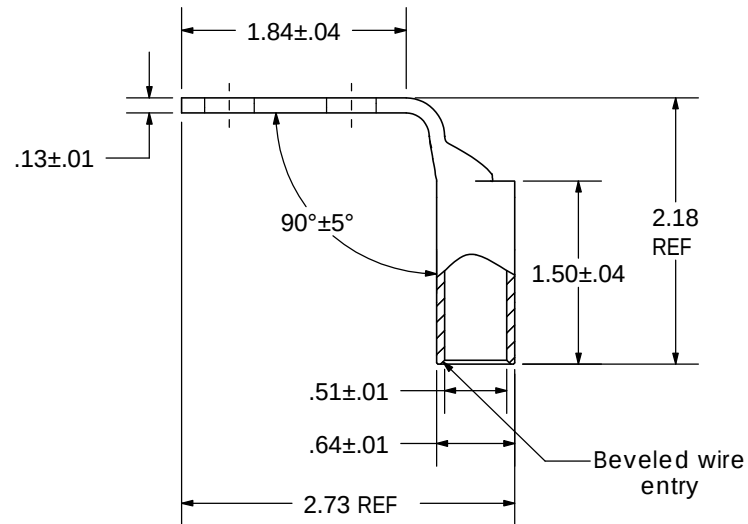

						PANDUIT CORP. TINLEY PARK, ILLINOIS	
						LCCX2/0-38DF-X Copper Lug - Two-Hole, Long Flex Barrel with Window, 90° Angle Tongue	
00	6/03	SAC	SAC	RELEASED	10850		
REV	DATE	BY	CHK	DESCRIPTION	ECN	SCALE N/A	DRAWING NO / CAD FILE LCCX2 0-38DF-CUST

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[LCCX2/0-38DF-X](#)