


SPECIFICATION CONTROL DRAWING

55PC1134TITLE
THREE CONDUCTOR CABLE, SHIELDED, JACKETED, 600 VOLTDate
1-15-93Revision
B

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

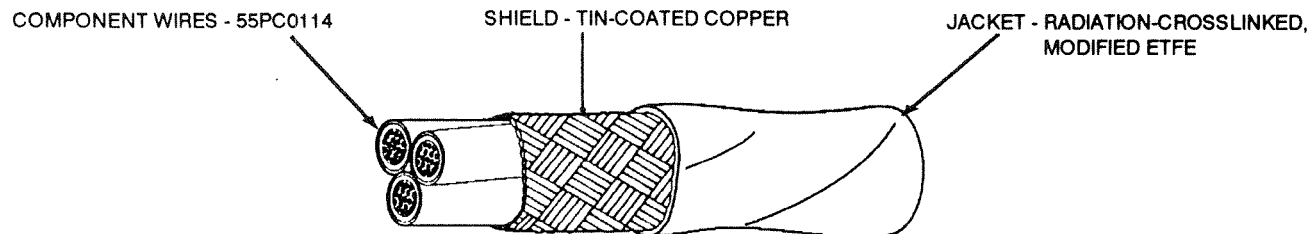

CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (in.)		DIAMETER (in.)			WEIGHT (lbs/1000 ft.)	
			LOWER SPEC LIMIT	TARGET WALL	LOWER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT
55PC1134-26-*	26	38	.0055	.0070	.094	.098	.102	8.87	9.32
55PC1134-24-*	24	38	.0055	.0070	.104	.108	.113	11.23	11.67
55PC1134-22-*	22	38	.0060	.0075	.118	.122	.127	14.85	15.39
55PC1134-20-*	20	38	.0060	.0075	.135	.139	.144	20.30	20.91
55PC1134-18-*	18	38	.0060	.0075	.155	.160	.165	28.14	28.94
55PC1134-16-*	16	38	.0060	.0080	.172	.177	.182	34.67	35.57

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms)**DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz****CROSSLINKING PROOF TEST: 300 ± 3°C for 1 hour****JACKET COLOR: White preferred****JACKET ELONGATION AND TENSILE STRENGTH:**

Elongation, 50% (minimum)

Tensile Strength, 5000 lbf/in² (minimum)**JACKET FLAWS:**

Spark Test, 1000 volts (rms), 60 Hz, 100% test

Impulse Dielectric Test, 6.0 kV (peak), 100 % test

SHIELD COVERAGE: 85% (minimum)**VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):**

1000 volts (rms), 60 Hz, 1 minute

PART NUMBER:

The *** in the part numbers above shall be replaced by a color code designator with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color.

Example: AWG 22, red, blue and yellow component wires;
white jacket: 55PC1134-22-2/6/4-9

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-881.

RaychemRaychem Corporation
300 Constitution Drive, Menlo Park, California 94025
(415) 361 3333 TWX 910 373 1728

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[55PC1134-24-3/6/9-3](#) [55PC1133-20-3/6/9-9CS3331](#) [55PC1134-24-2/4/6-9CS2970](#) [55PC1134-24-2/4/6-9CS2502](#)
[55PC1134-26-3/6/9-9](#) [55PC1134-24-3/6/9-9](#)