

**Micro Commercial Components** 



**Micro Commercial Components** 20736 Marilla Street Chatsworth CA 91311 Phone: (818) 701-4933 (818) 701-4939 Fax:

### Features

- Halogen free available upon request by adding suffix "-HF"
- Lead Free Finish/RoHS Compliant (NOTE 1)("P" Suffix designates RoHS Compliant. See ordering information)
- Low forward voltage drop, high current capability.
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- · Ideal for printed circuit board

#### Maxi mum Rati nas

- Mounting Torgue: 5 in-lbs Maximum
- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C
- UL Recognized File # E165989

MCC	Device	Maximum	Maximum	Maximum	
Catalog	Marking	Reccurrent	RMS	DC	
Number	-	Peak Reverse	Voltage	Blocking	
		Voltage	-	Voltage	
GBJ35005	GBJ35005	50V	35V	50V	
GBJ3501	GBJ3501	100V	70V	100V	
GBJ3502	GBJ3502	200V	140V	200V	
GBJ3504	GBJ3504	400V	280V	400V	
GBJ3506	GBJ3506	600V	420V	600V	
GBJ3508	GBJ3508	800V	560V	800V	
GBJ3510	GBJ3510	1000V	700V	1000V	

### Flectrical Characteristics @ 25°C Unless Atherwise Snecified


$10011001010101001010000 \otimes 2000010000000000$				
Average Forward Current	I <sub>F(AV)</sub>	35 A	Tc = 100°C	
Peak Forward Surge Current	I <sub>FSM</sub>	350A	8.3ms, half sine	
Maximum Instantaneous Forward Voltage	V <sub>F</sub>	1.05V	I <sub>FM</sub> = 17.5 A T <sub>J</sub> = 25°C	
Maximum DC Reverse Current At Rated DC Blocking Voltage	I <sub>R</sub>	10 μA 500uA	TJ = 25°C TJ= 125°C	
Typical thermal resistance	R <sub>ojc</sub>	0.6°C/W		
Typical Junction Capacitance	CJ	85 pF	Measured at 1.0MHz, V <sub>R</sub> =4.0V	


Notes: 1. High Temperature Solder Exemption Applied, see EU Directive Annex Notes 7

## www.mccsemi.com

# **GBJ35005** THRU **GBJ3510**

### 35 Amp **Glass Passivated Bridge Rectifier** 50 to 1000 Volts

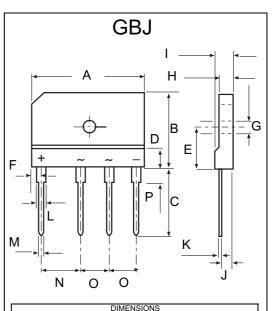

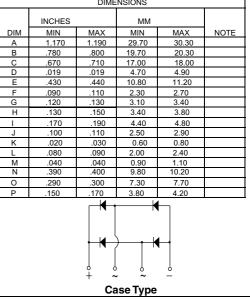

### **RATING AND CHARACTERISTIC CURVES GBJ35005 thru GBJ3510**

TJ = 25℃, f = 1MHz

4.0


10.0


**REVERSE VOLTAGE**, VOLTS

1.0

1.0



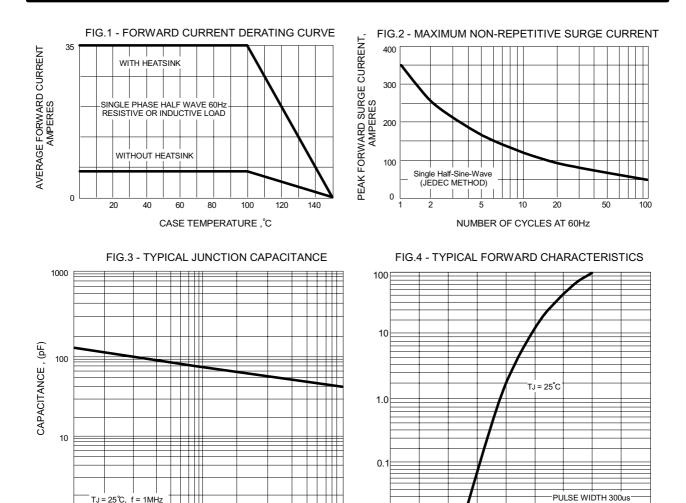



100

FIG.5 - TYPICAL REVERSE CHARACTERISTICS

0.01

0

0.2

0.4

0.6

0.8

INSTANTANEOUS FORWARD VOLTAGE, VOLTS


1.0

1.2

1.4

1.6

1.8

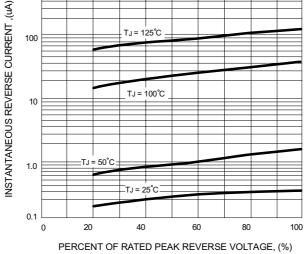

## www.mccsemi.com



### **Ordering Information :**

Device	Packing	
Part Number-BP	Bulk: 1.5K/Ctn	

Note : Adding "-HF" suffix for halogen free, eg. Part Number-BP-HF

#### **\*\*\*IMPORTANT NOTICE\*\*\***

*Micro Commercial Components Corp.* reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp*. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp*. and all the companies whose products are represented on our website, harmless against all damages.

#### \*\*\*LIFE SUPPORT\*\*\*

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

#### \*\*\*CUSTOMER AWARENESS\*\*\*

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

## www.mccsemi.com

### **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Micro Commercial Components (MCC):

GBJ3502-BP GBJ3506-BP GBJ3508-BP GBJ3501-BP GBJ3504-BP GBJ3510-BP GBJ35005-BP