
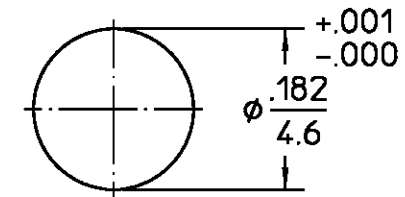


DESIGNED FOR USE WITH	.085 S/R
CABLE ENTRY DIAMETER MINIMUM	
CONTACT	.0225
HOUSING	.089

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
B1	REVISED PER ECO-11-005030	30MAR11	HMR

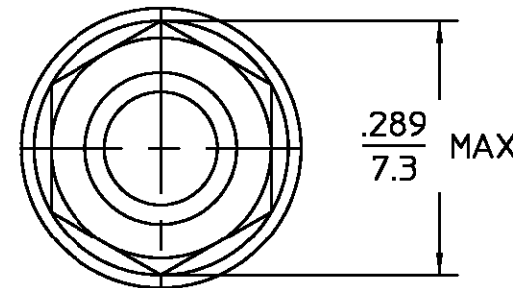

RECOMMENDED MOUNTING HOLE

ELECTRICAL	MECHANICAL	ENVIRONMENTAL	COMPONENT	MATERIAL	FINISH
Nominal Impedance (Ohms) <u>50 ±1</u>	Interface Dimensions <u>SEE CATALOG</u>	Temperature Rating <u>-65° to +125°C</u>	HOUSING MOUNTING NUT LOCKWASHER	STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303	GOLD PLATE PER MIL-G-45204
Frequency Range (GHz) DC to <u>28</u>	Mating Characteristics:	Vibration MIL-STD-202, Method 204, Condition D	DIELECTRIC	PTFE FLUOROCARBON PER ASTM-D-1457	N/A
Volt Rating (VRMS MAX) @ Sea Level <u>335</u>	Insertion (MAX Lbs) <u>3</u>	Shock MIL-STD-202, Method 213, Condition I	CENTER CONTACT	BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204
VSWR <u>1.05±.01</u> f(GHz)	Withdrawal (MIN Oz) <u>0.5</u>	Thermal Shock MIL-STD-202, Method 107, Condition B	O-RING	FLUROSILICONE 60 (DUROMETER) PER MIL-R-25988, CLASS 1, TYPE 1	N/A
Insertion Loss (dB MAX) <u>.04x√f(GHz)</u>	Force to Engage (In-Lbs MAX) <u>3</u> & Disengage (In-Lbs MAX) <u>15</u>	Moisture Resistance MIL-STD-202, Method 106			
RF Leakage (dB MIN) (Interface Only, Fully Mated) <u>-(90-f(GHz))</u>	Center Contact Captivation Axial (Lbs) <u>4</u>	Corrosion - MIL-STD-202, Method 101, Condition B			
Corona, 70,000 Ft (VRMS MIN) <u>250</u>	Cable Retention Axial Force (Lbs MIN) <u>30</u>				
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level <u>675</u>	Torque (In-Oz MIN) <u>16</u>				
Contact Resistance (Milliohms MAX)	Weight (Grams) <u>TBD</u>				
Center Contact <u>6.0</u>					
Outer Contact <u>3.0</u>					
Cable to Housing <u>0.5</u>					
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) <u>670</u>					
LR.(Megohms MIN) <u>5000</u>					
<p>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES</p> <p>FRAC. ± 1/64 DEC. ±.005 ANGLES ± 1°</p> <p>.XXX = in XX.X = mm (REF)</p>			<p>DRAWN BY D. CAM DATE 1-3-85</p> <p>CHECKED BY PCV 1-3-85</p> <p>APP'D BY PCV 2-2-85</p> <p>USE ASS'Y PROCEDURE</p> <p>NO. AP. <u>47-003</u></p>	<p>TE TE Connectivity</p> <p>TITLE OSSP BULKHEAD FEEDTHRU CABLE PLUG-DIRECT SOLDER ATTACHMENT</p>	
			CUSTOMER DRAWING	SIZE B CODE IDENT NO. 26805 1059857-1 REV B1	SCALE 5:1 SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[4703-7985-00](#)