

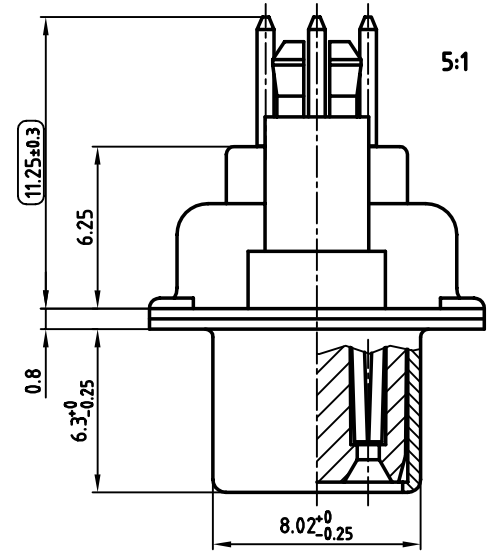
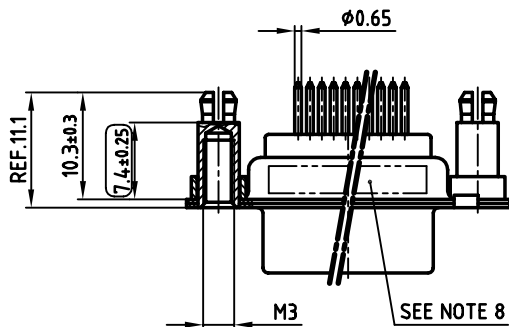


used for: D-SUB HD

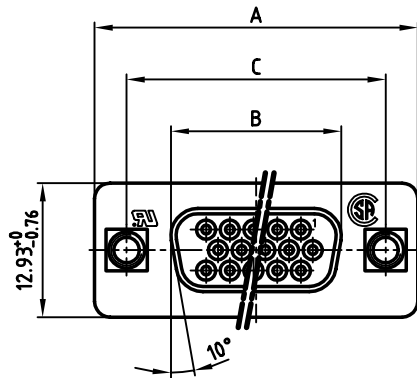

NOTES:

1. METALSHELLS: STEEL; min. 320µ" TIN
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
PLATING: 8µ" HARD GOLD OVER min. 50µ" NICKEL
4. THREADED SPACER CLIP: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
PCB-HOLE: Ø3.1±0.1; PCB THICKNESS 1.6mm
5. COLLAR: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
6. P.C.B. HOLE DRILLINGS ON DRAWING NO.: 16V1IH6B
7. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
8. CONNECTOR IS PART MARKED: **PART-NO. CONEC Y/WW**
9. = CHECK DIMENSION

POS.	A -0.76	B -0.25	C	Part NO.
15	31.19	16.46	25.00 ^{+0.12} / _{-0.13}	164A17409X
26	39.52	24.79	33.30 ^{+0.15} / _{-0.1}	164A17419X
44	53.42	38.50	47.04 ±0.13	164A17429X
62	69.70	54.96	63.50 ±0.13	164A17439X

Directive 2002/95/EC
„RoHS“
Compliant

APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance			dim. in mm
2004	date		
drawn	09.02.	name	
appd.	09.02.	Mickenbecker	
norm	DIN 41652		
d-old			
CONEC®			

scale:	2:1 (5:1)	
material:	SEE NOTES	
title:	D-SUB HD FEMALE 15-62pos. SOLDER PIN STRAIGHT with threaded spacer clip	
dwg no:	AutoCAD 2000	DIN-A
	16K1A1095	3
		sh: 1/1
part no:	SEE TABLE	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CONEC:](#)

[164A17409X](#)