
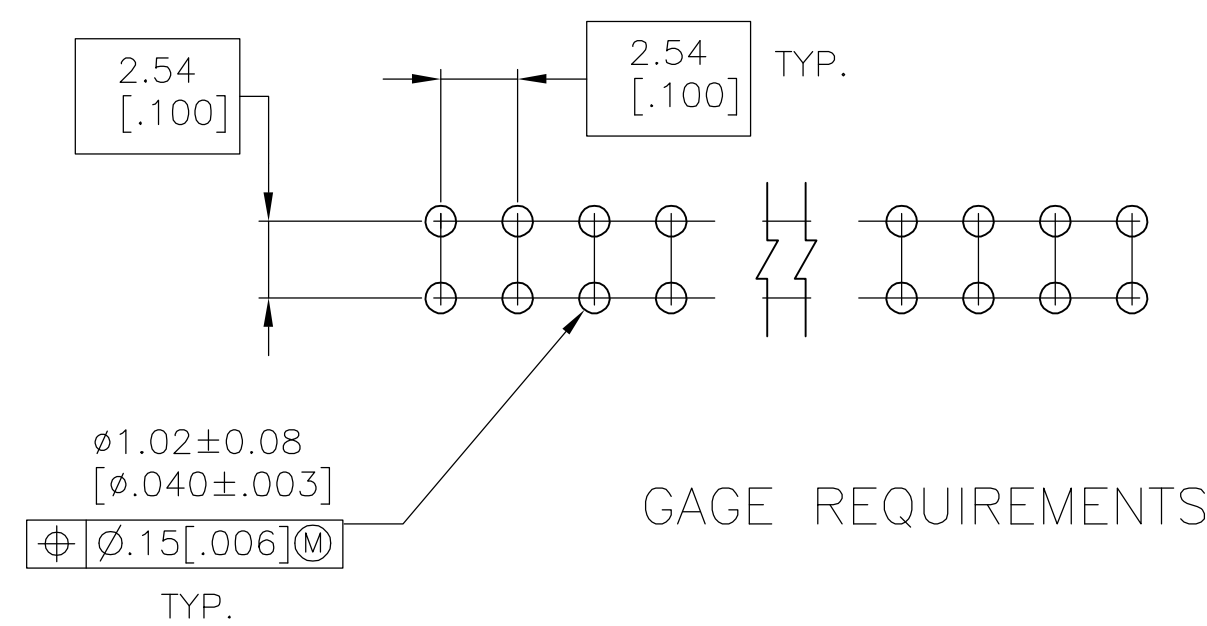
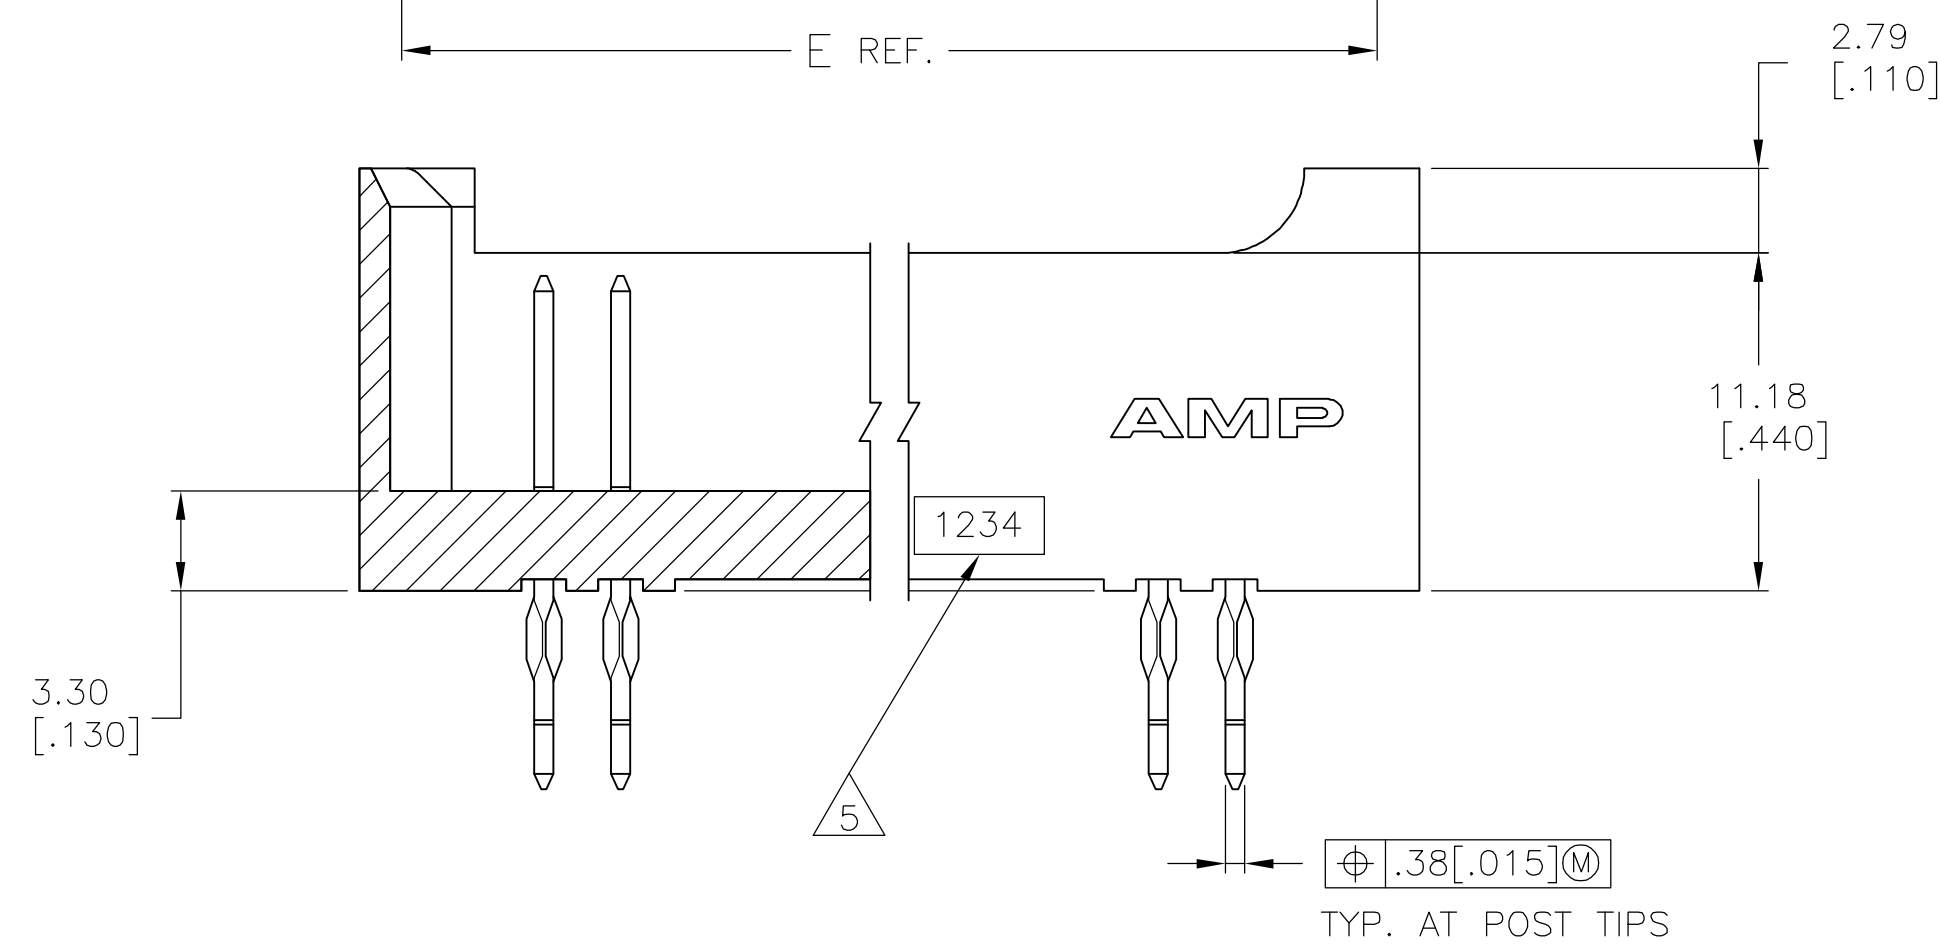
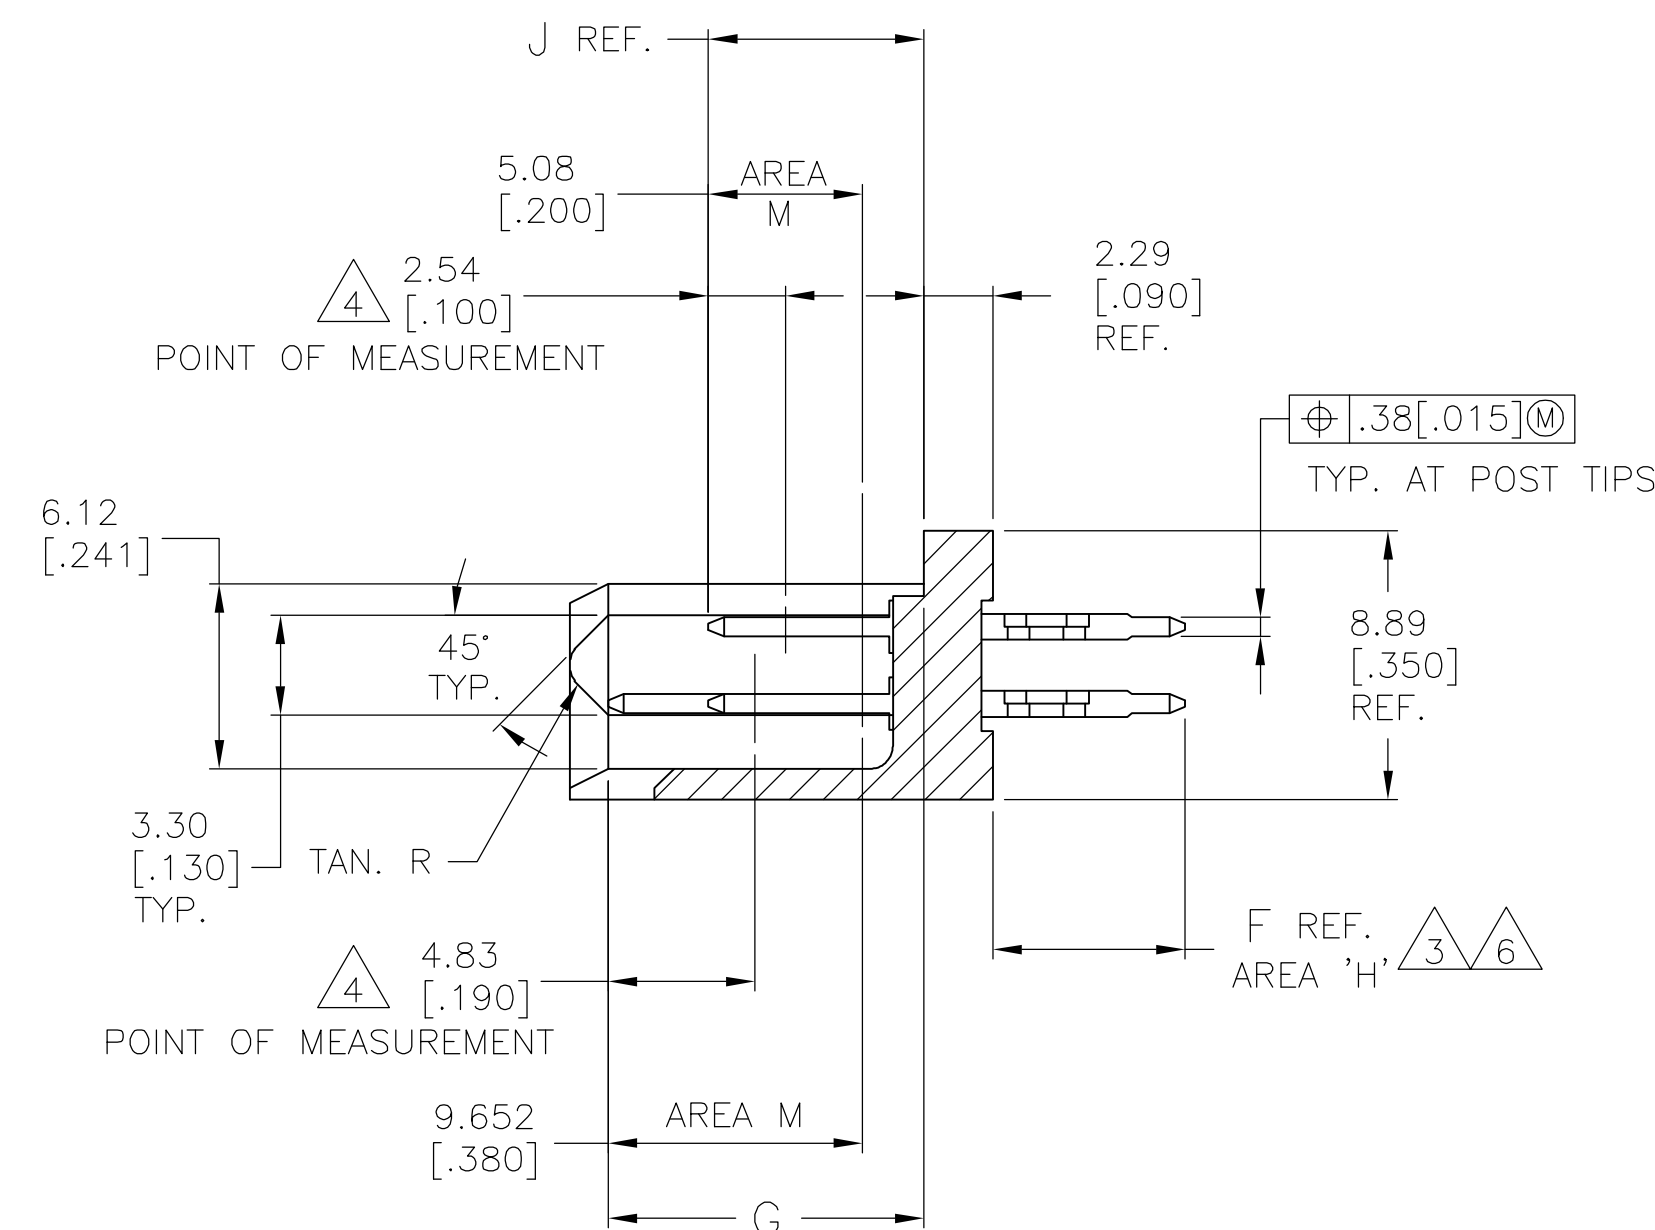


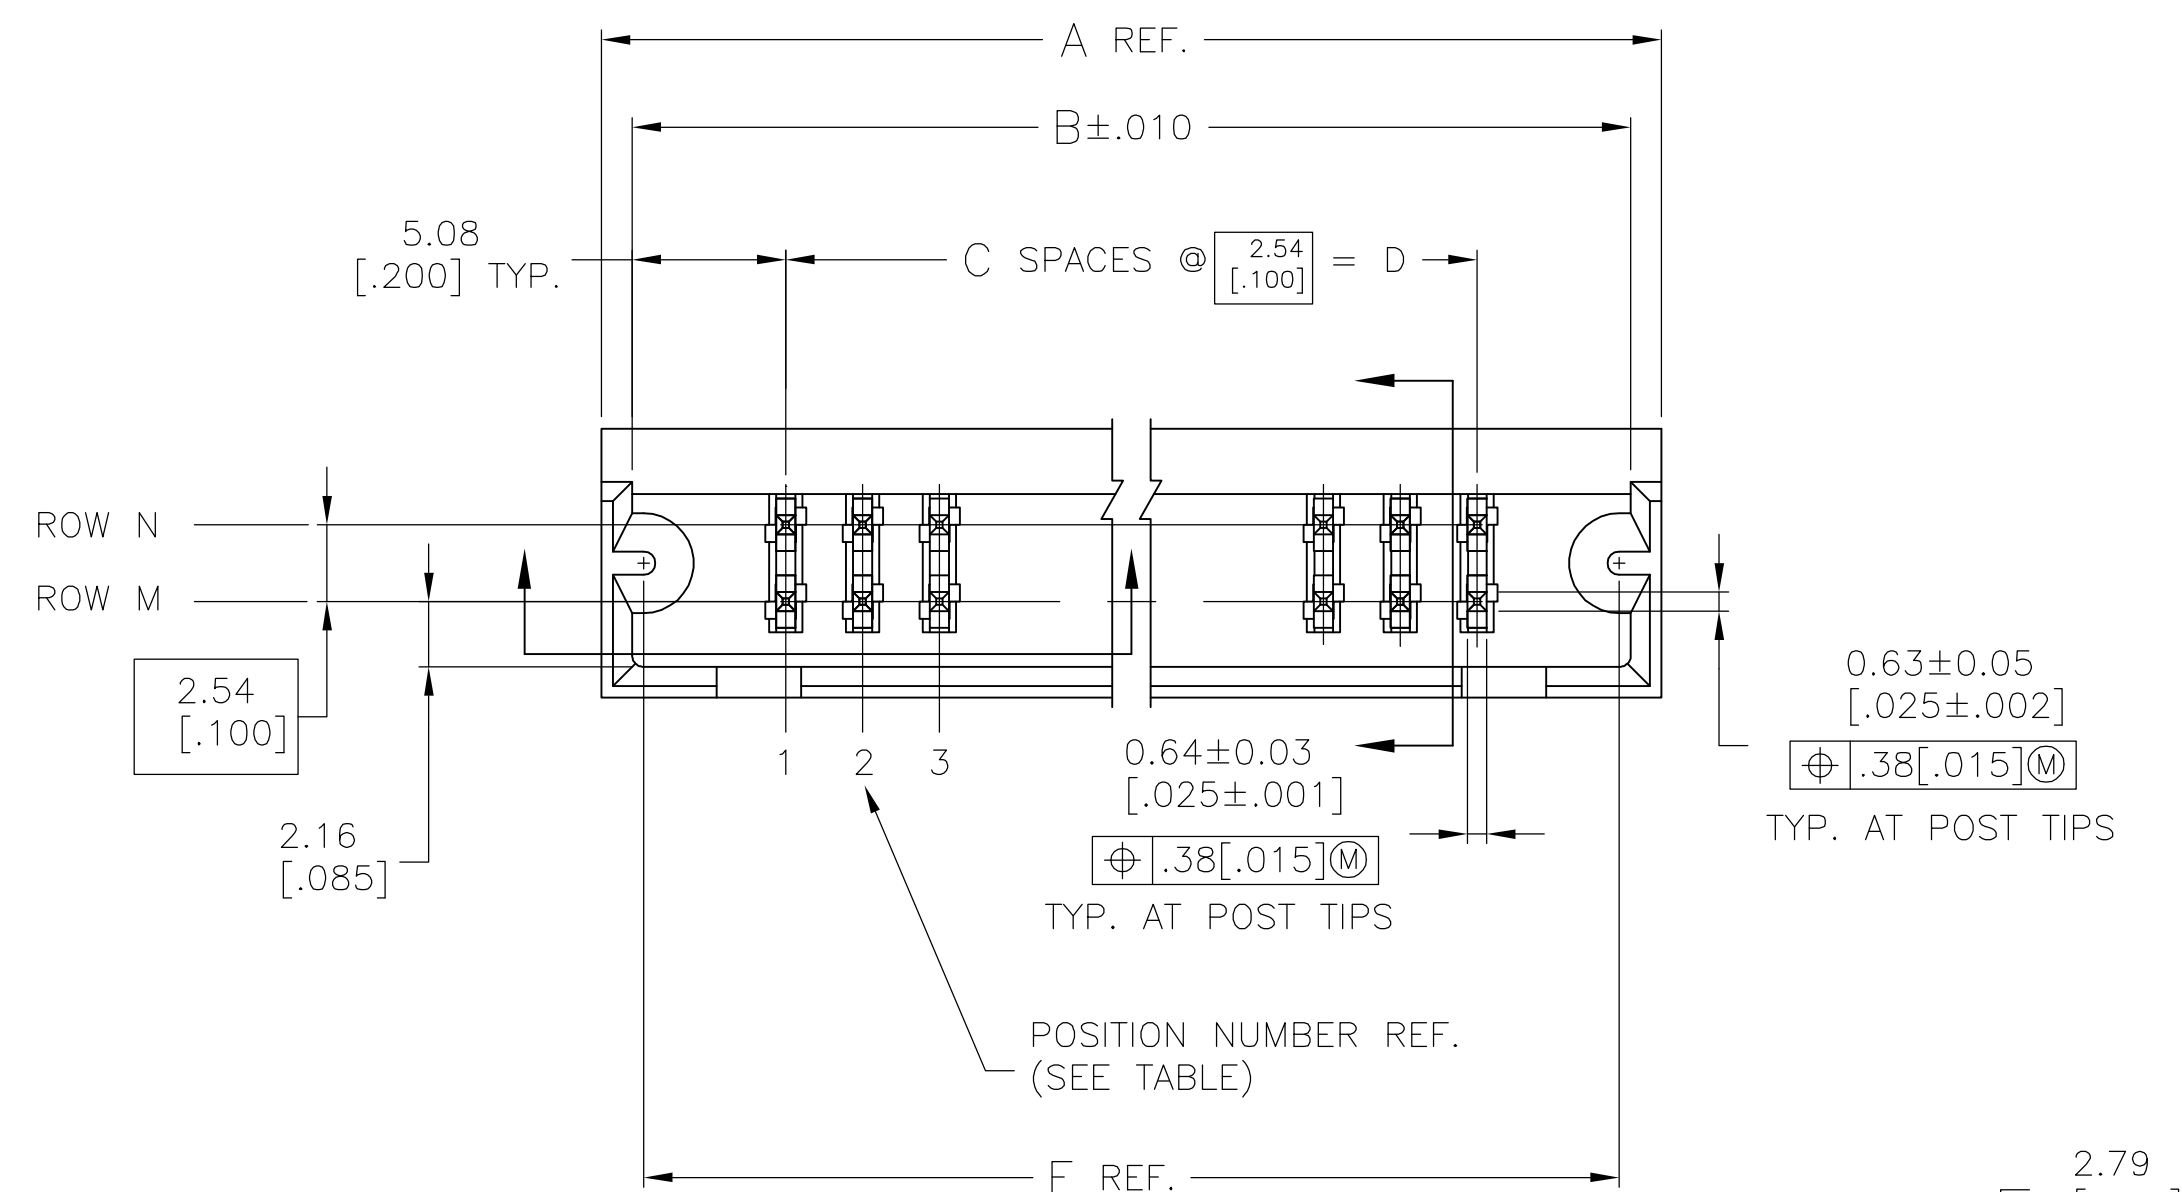

- | | |
|---|--|
| 1 | FLAME RETARDANT THERMOPLASTIC, COLOR; BLACK |
| 2 | COPPER ALLOY |
| 3 | .00076[.000030] GOLD OVER .00127[.000050] NICKEL AT AREA "M"
.00254[.000100]—.00508[.000200] BRIGHT TIN—LEAD OVER
.00127[.000050] NICKEL AT AREA 'H' |
| 4 | POINT OF MEASUREMENT FOR PLATING THICKNESS |
| 5 | RECESSED DATE CODE AND CSA LOGO. |
| 6 | .00076[.000030] GOLD OVER .00127[.000050] NICKEL AT AREA "M"
.00254[.000100]—.00508[.000200] MATTE TIN OVER
.00127[.000050] NICKEL AT AREA 'H' |
| 7 | ROHS 2002/95/EC COMPLIANT |

7	6	CURCUIT 11,12 ROW M	8.13 [.320]	10.41 [.410]	6.35 [.250]	70.36 [2.770]	60.96 [2.400]	24	71.12 [2.800]	73.15 [2.880]	50	5-146701-1
	3	CURCUIT 11,12 ROW M	8.13 [.320]	10.41 [.410]	6.35 [.250]	70.36 [2.770]	60.96 [2.400]	24	71.12 [2.800]	73.15 [2.880]	50	146701-1
	FINISH	SELECT LOAD .410 HIGH	J	G	F	E	D	C	B	A	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T. HOFFMAN 10/19/95 GWH H. PALEY 11/22/95 APWD H. PALEY 11/22/95	 Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME	ASSEMBLY, HEADER, MOD II, DOUBLE ROW, .100 X .100 CL, .025 SQ. ACTION PIN POSITS, SELECT LOAD	
	0 PLG ± - 1 PLG ± - 2 PLG ± - 3 PLG ± - 4 PLG ± - ANGLES ± -	PRODUCT SPEC		
		APPLICATION SPEC		
			SIZE	CAGE CODE DRAWING NO
MATERIAL	FINISH	WEIGHT	A1	00779
	 	CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 1 REV A
		RESTRICTED TO		146701

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-146701-1](#)