
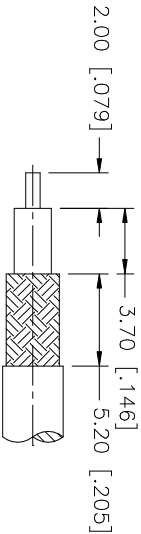

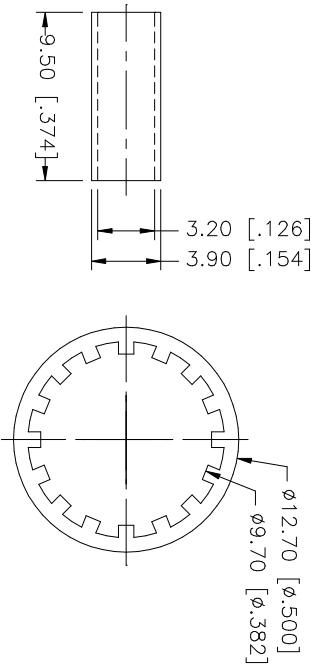

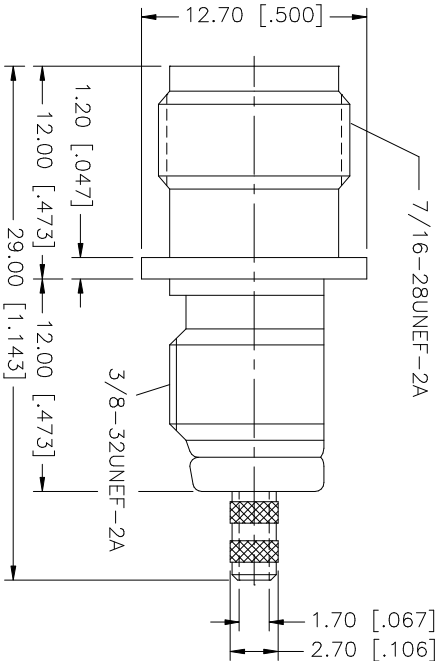


REV.	DATE	DESCRIPTION
NC	10/25/02	INITIAL RELEASE

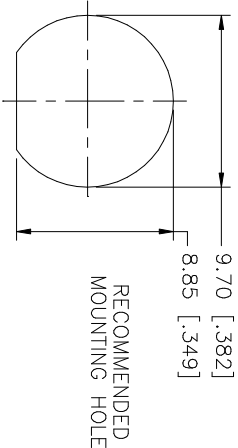

RECOMMENDED CABLE STRIPPING DIM'S

- CRIMP NOTES:
1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
 2. CRIMPED CONTACT PIN
SQ. CRIMP SIZE .7mm
 3. MAX. PANEL THICKNESS = 7mm

9	HEX NUT	BRASS	NICKEL	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY	APPROVALS	DATE	Amphenol - Connex CONNECTOR CORPORATION TNC BULKHEAD CRIMP JACK (FOR RG-316/U, 174/U, 188A/U CABLE)				
8	LOCK WASHER	BRASS	NICKEL								
7	FERRULE	COPPER	NICKEL								
6	CONTACT PIN	BRASS	GOLD								
5	BARREL	BRASS	NICKEL								
4	LOCK RING	BRASS	NICKEL	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .XXX = ± 0.005" .XX = ± 0.010" .X = ± 0.020"	ISSUED		TITLE TNC BULKHEAD CRIMP JACK (FOR RG-316/U, 174/U, 188A/U CABLE)				
3	CONTACT PIN	PHOS. BRONZE	GOLD								
2	INSULATOR	TEFLON	NATURAL								
1	BODY	BRASS	NICKEL				SIZE A	FSCM NO. 99001	DWG. NO. 122487.DWG	REV. NC	
DESCRIPTION		MATERIAL	FINISH	DO NOT SCALE DRAWING			SCALE NA	PART NO. 122487	SHEET 1	OF 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[122487](#)