
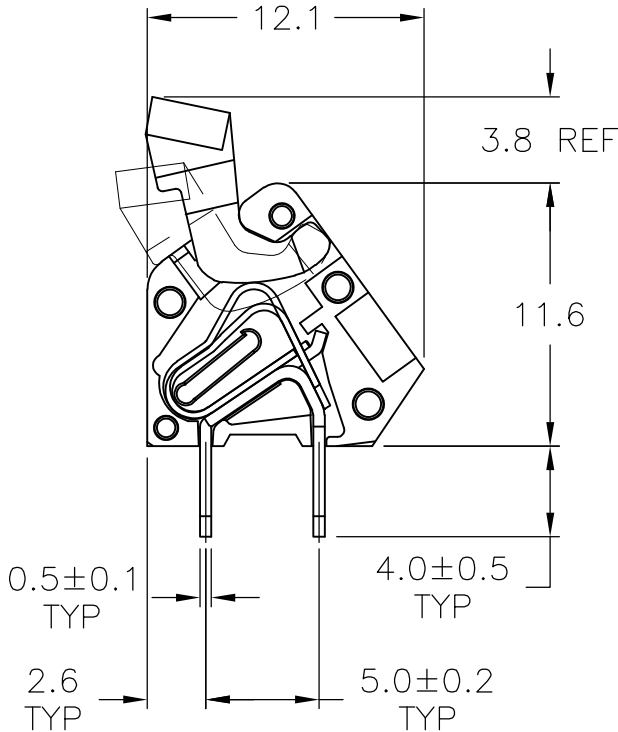
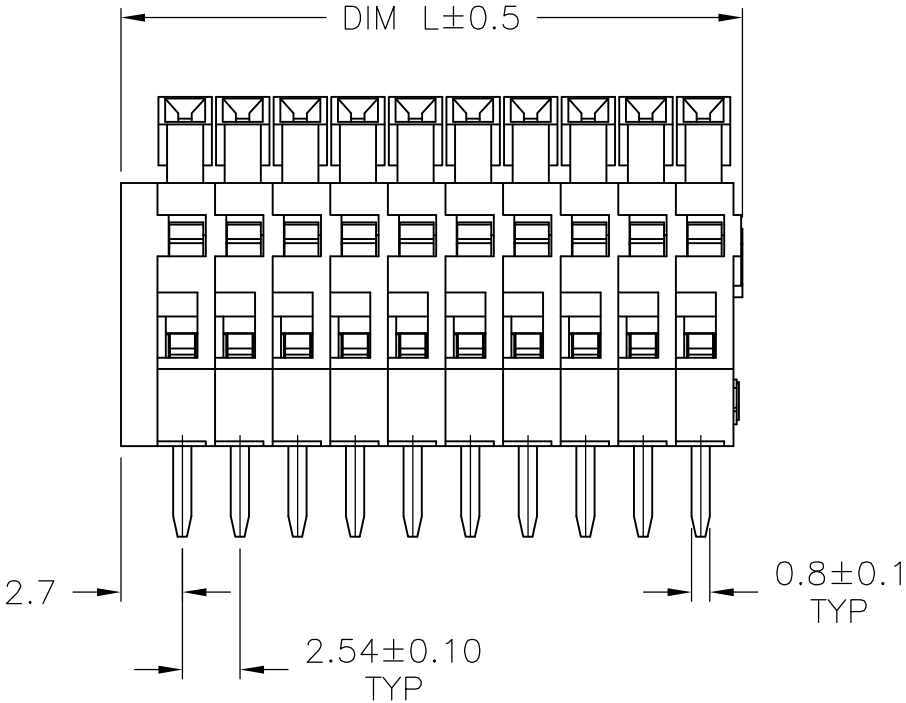


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
FT	0		2	REVISED PER ECO-029853	12/17/07	SS	CR


PHYSICAL:
HOUSING: POLYAMIDE 66, GLASS FILLED, UL94V-0, GRAY.
TERMINAL: BRASS, TIN PLATED.
SPRING: STAINLESS STEEL.

ELECTRICAL:
CURRENT RATING: 4A
VOLTAGE RATING: 150VAC
WIRE RANGE: 20-28 AWG
INSULATION RESISTANCE: >2000Mohm DC500V.
INSULATION WITHSTANDING: AC1500V MIN.

MECHANICAL:
OPERATING TEMPERATURE: -40°C TO +105°C

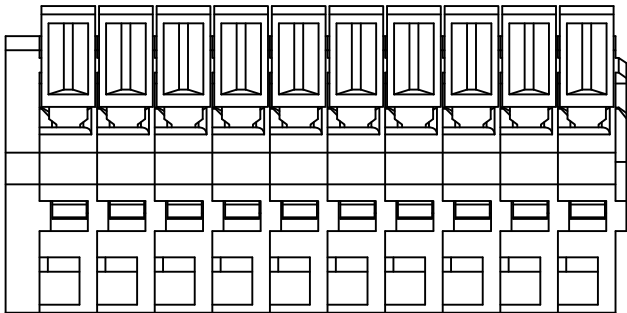

THIS PRINT IS
PRELIMINARY
PRIOR TO CUSTOMER ORDER
CONTACT PRODUCT ENGINEERING
BEFORE USING THIS PRINT

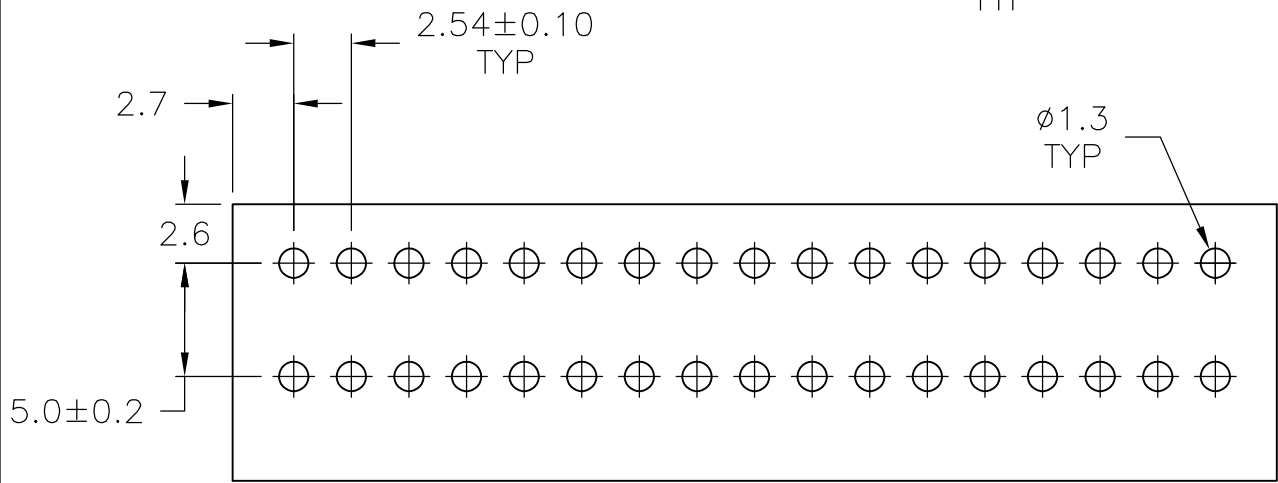

RECOMMENDED PCB LAYOUT

44.68	17	1-1986220-7
42.14	16	1-1986220-6
DIM L	POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 7/17/07	 Tyco Electronics Corporation Harrisburg, PA 17105-3608			
DIMENSIONS: mm		CHK C RICHARD 7/17/07				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD C RICHARD 7/17/07	NAME 2.54mm SCREWLESS TERMINAL BLOCK			
0 PLC ± - 1 PLC ± 0.3 2 PLC ± 0.10 3 PLC ± - 4 PLC ± - ANGLES ± 1°		PRODUCT SPEC	-			
MATERIAL		APPLICATION SPEC	-			
FINISH		WEIGHT	-			
-		CUSTOMER DRAWING	SCALE NTS	SHEET 1 OF 1	RESTRICTED TO -	
			SIZE A3	CAGE CODE 00779	DRAWING NO C-1986220	REV 2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1986220-6](#)