

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

, 19

© COPYRIGHT 19

BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

MOD
23LOC
BDDIST
39

P

F

ZONE

LTR

REVISIONS

DESCRIPTION

DATE


APPD

REDRAWN AND REV PER ECN BD4183

8/2/90


KJ

HOUSING
MATERIAL:
THERMOPLASTIC
COLOR: BLACK

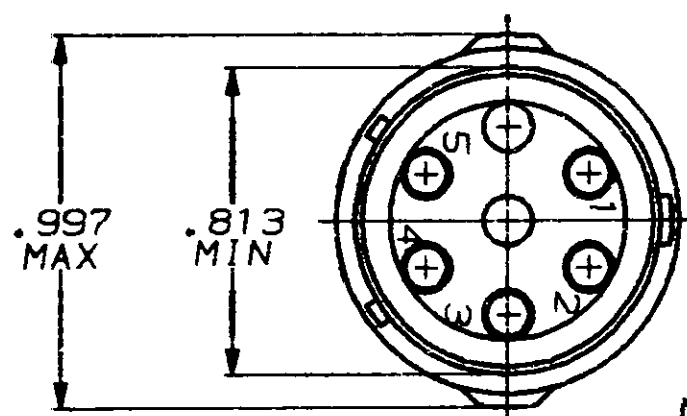


MATING FACE

PERIPHERAL SEAL,
MATERIAL: ELASTOMER
COLOR: BLACK

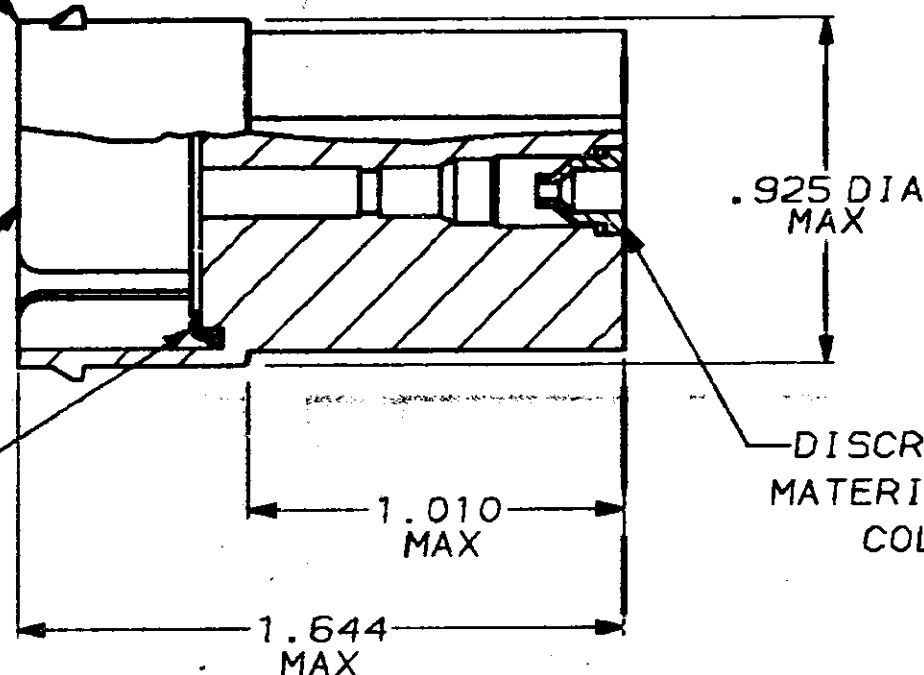

DISCRETE WIRE SEAL,
MATERIAL: ELASTOMER
COLOR: BLACK

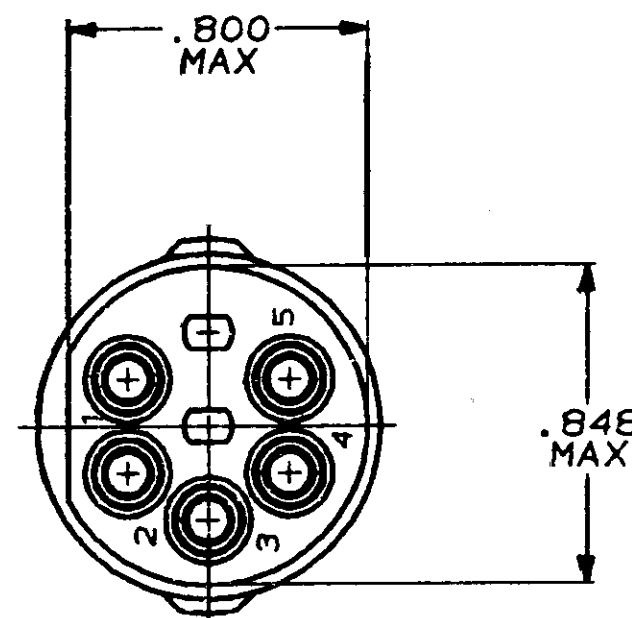

1. WIRE INSULATION SEALING RANGE: .070-.130 DIA.
2. THIN MEMBRANE PERMISSABLE ON SMALL DIAMETER OF WIRE SEALS.
3. ROTATION OF CAVITY CIRCUIT KEY FROM PART TO PART IS PERMISSIBLE.

NO	207848-2
YES	207848-1
SEALS	PART NO

DO NOT SCALE PRINT.
UNLESS SPECIFIED
DIMENSIONS IN INCHES
TOLERANCES ON:
2 PLC DEC * -
3 PLC DEC * -
ANGLES * -

MATERIAL

SEE CALLOUT

FINISH

DR 8/2/90
A. STAUB DS

CHK *J. Mullin* 1-4-91APPD *S. Beaver* 1-18-91

APPD -

PRODUCT SPEC

-

APPLICATION SPEC

-

WEIGHT

-

AMP

AMP INCORPORATED
Harrisburg, Pa. 17105

NAME

RECEPTACLE, 5 POSITION, STD
ECONOSEAL CONNECTOR

SIZE

B

FSOM NO

00779

DRAWING NO

207848

SCALE

-

SHEET

1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[207848-1](#)