


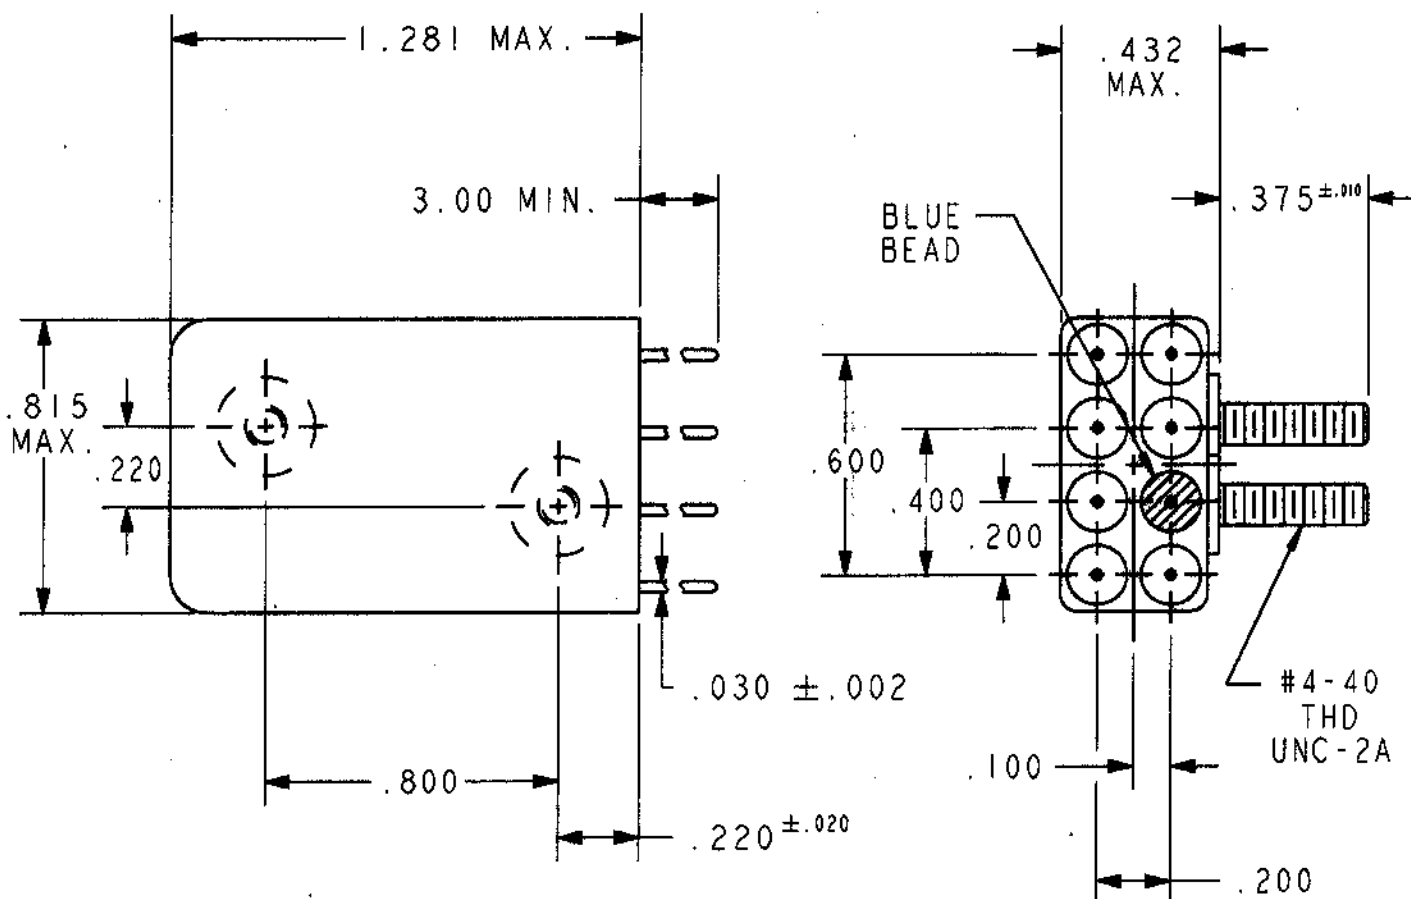


REV. 1
DCO 170580

COIL: @ 25°C
 RESISTANCE 2500 OHMS ±10%
 NOMINAL VOLTAGE 8.0 mADC
 MUST OPERATE 4.0 mADC
 MUST RELEASE 2.0 mADC MAX, 0.4 mADC MIN.

ENVIRONMENT:
 VIBRATION 10 CPS TO 2000 CPS @ 15 g's
 SHOCK 100 g's 6 ± 1 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C
 NOTES: OPERATE 15 MS MAX
RELEASE 10 MS MAX
CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

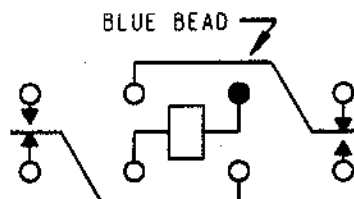

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
2 AMPS @ 28 VDC RESISTIVE
100,000 OPERATIONS

DR. BSH 10/11/01 CK. TLG 10-11-01

CII Technologies
 advanced control electronic solutions

CUST. OPL
 CUST. NO. M5752/13-130 REV.

3SAT RELAY

3SAT1347A2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3SAT1347A2](#)