


THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION
ALL RIGHTS RESERVED.

© COPYRIGHT - By -

REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN APVD
	AC1	REVISED PER ECO-14-008433	05JUN2014	NK MZ
	AD	REVISED PER ECO-17-000037	10MAR2017	RS MZ

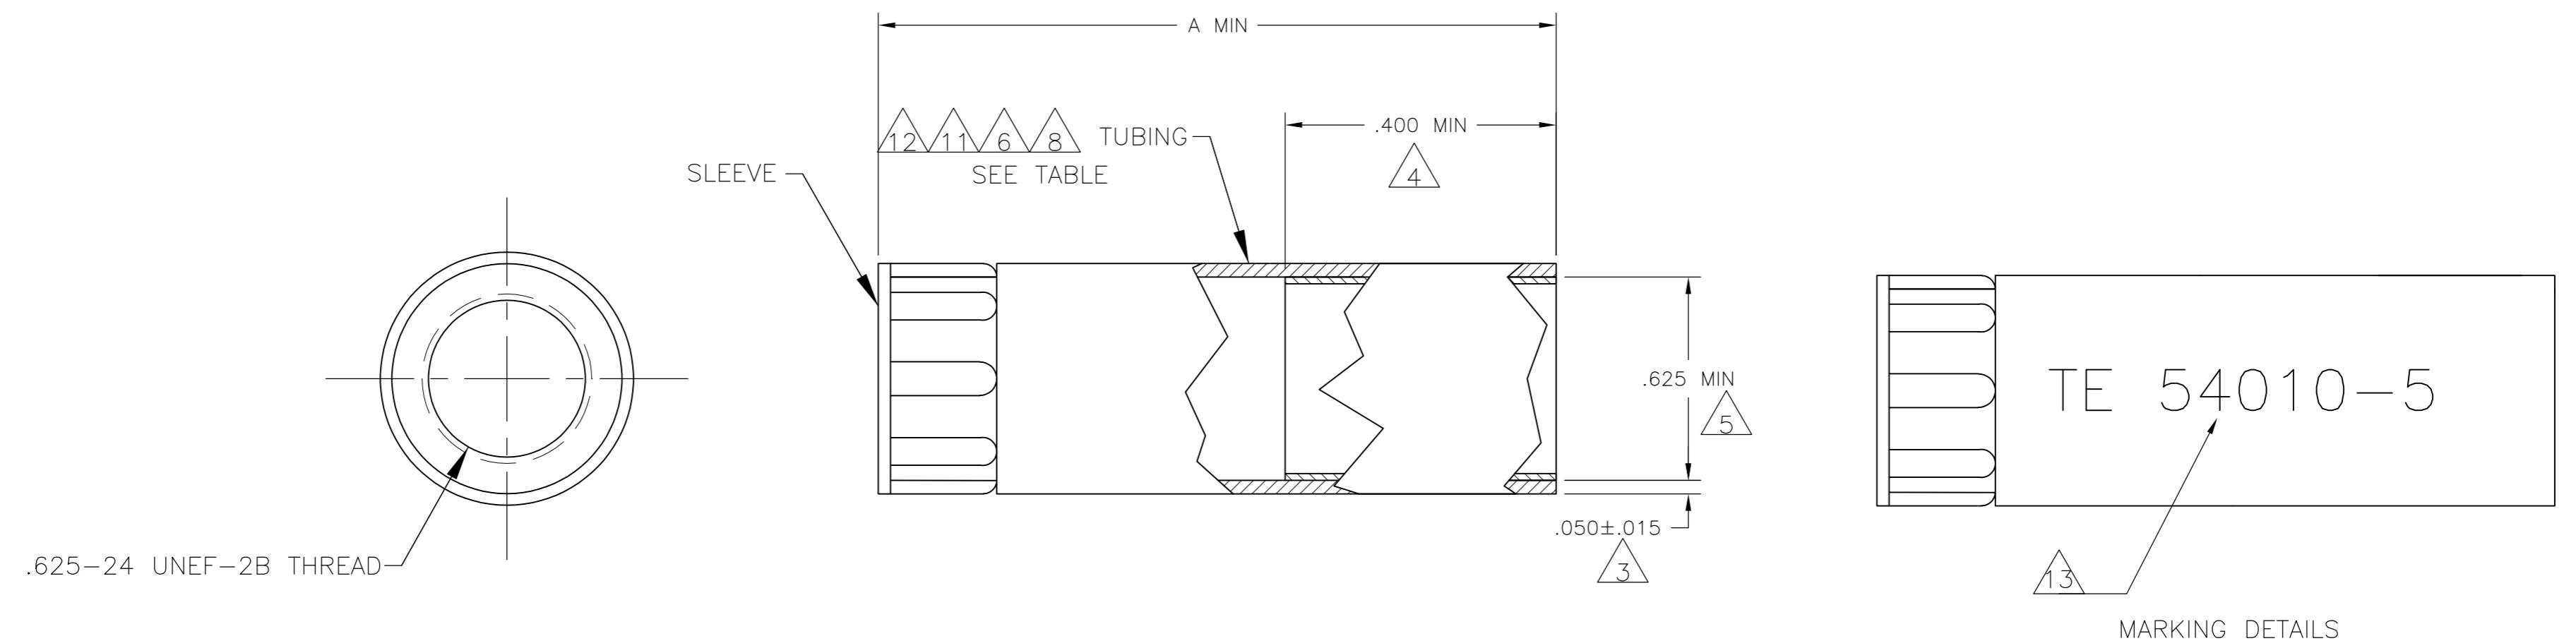

- 1 POLYOLEFIN, BLACK.
- 2 NYLON, BLACK.
- 3 NOMINAL WALL THICKNESS, EXPANDED.
- 4 LENGTH OF SEALANT.
- 5 EXPANDED INSIDE DIAMETER.
- 6 6.35[.250] MAXIMUM RECOVERED INSIDE DIAMETER.
- 7 ASSEMBLY WILL PASS 0.0703 KG PER SQ CENTIMETER [ONE POUND PER SQ IN.] WATER PRESSURE TEST.
- 8 121°C [250°F] SHRINK TEMPERATURE.
- 9 -55°C TO 110°C [-67°F TO 230°F] OPERATING TEMPERATURE.
- 10 THIS PART WILL ACCOMODATE Ø6.35 - Ø15.24 [Ø.250 - Ø.600] CABLE RANGE.
- 11 4.06 [.160] MAXIMUM RECOVERED INSIDE DIAMETER.
- 12 ACTUAL SHAPE MAY VARY DUE TO PROCESS VARIANCE.
- 13 SEE P/N CHART FOR MARKING. WHITE CHARACTERS .150 MIN HIGH AND LOCATED ON THE OUTSIDE SURFACE OF THE TUBING.
- 14 OBSOLETE PART.

TE 54010-5	6 8	2.25	14 54010-5
NONE	11 8	2.25	54010-4
NONE	6 8	1.25	54010-2
NONE	6 8	2.25	54010-1
MARKING	RECOVERED INSIDE DIS	A	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 09 APR 96 C.REIFSNYDER	TE Connectivity
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK 15 APR 95 R.STONE	
0 PLC 1 PLC 2 PLC 3 PLC 4 PLC	± - ± - ± - ± - ± -	APVD 03 MAY 96 T.A.WETZEL	NAME
ANGLES	—	PRODUCT SPEC	STRAIN RELIEF ASSY, SHELL SIZE 11, CPC
MATERIAL TUBING: △ SLEEVE: △	FINISH —	APPLICATION SPEC —	SIZE CAGE CODE DRAWING NO A2 00779 C-54010
WEIGHT —	RESTRICTED TO —	CUSTOMER DRAWING	SCALE 2:1 SHEET 1 OF 1 REV AD

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[54010-4](#)