

NUMBER 316080





3rd ANGLE PROJECTION

METRIC

DIMENSIONS IN MILLIMETERS. DO NOT SCALE PRINT

PRINT DIST

VIEW A  
回路番号  
CIRCUIT NO  
AMPマーク  
シリーズマーク  
SERIES MARK

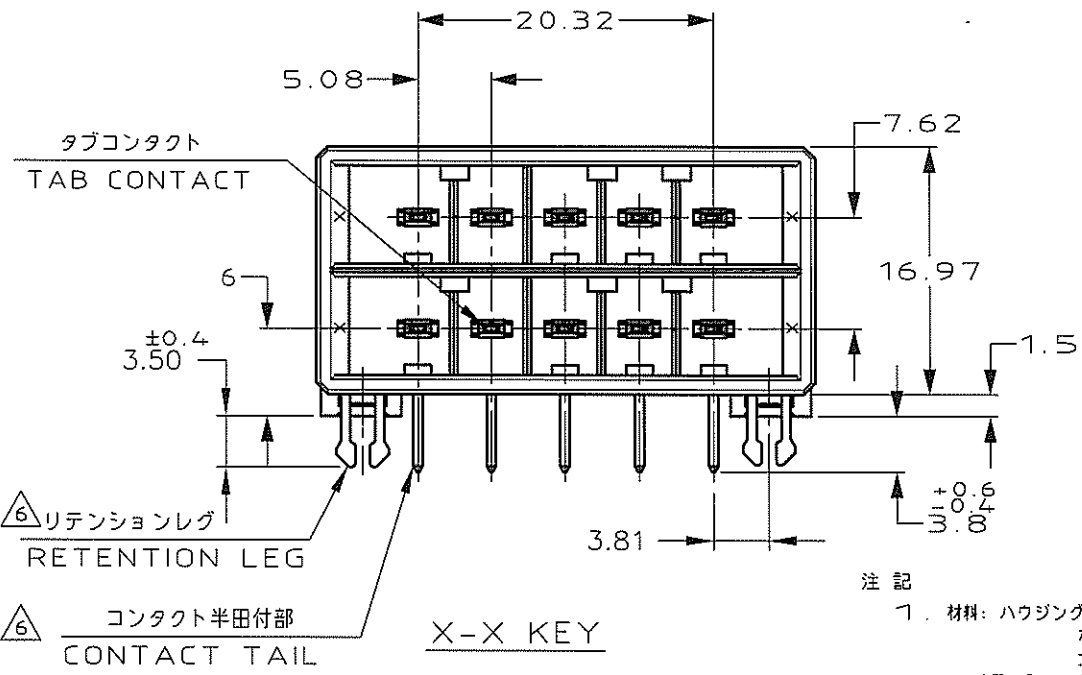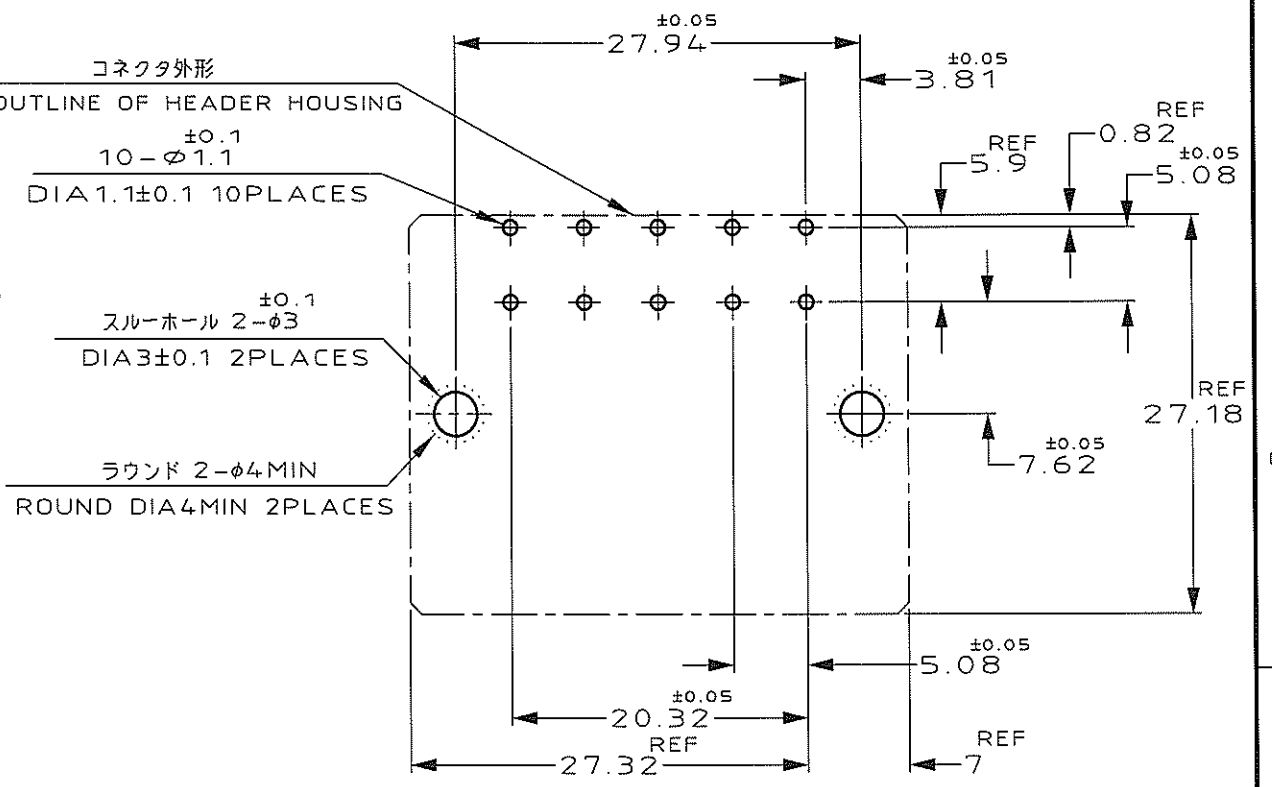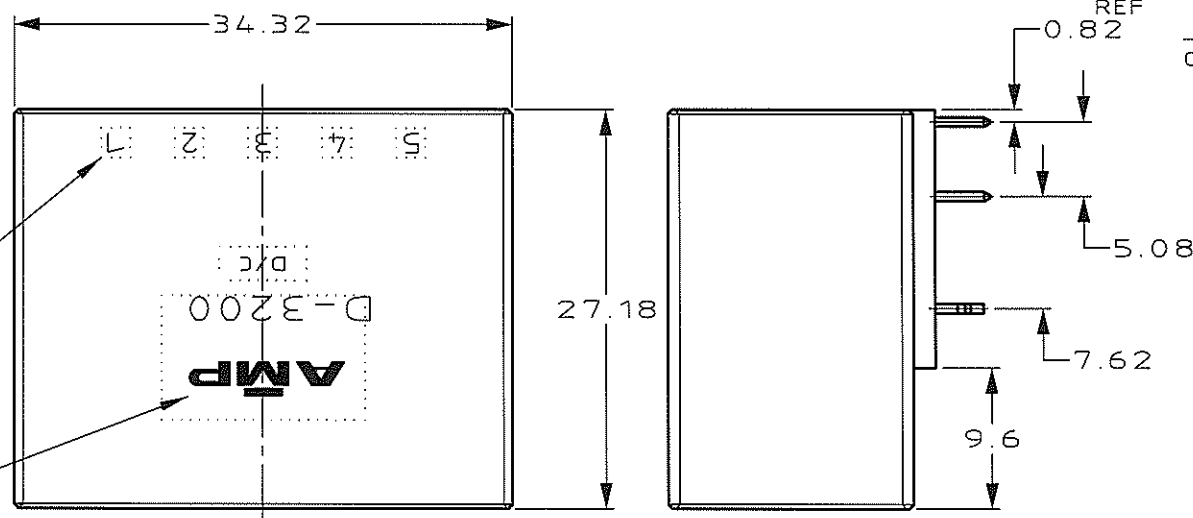

推奨基板取付け穴寸法  
PC 基板厚: 1.6±0.1  
(非累積公差)  
(コネクタ搭載面)

RECOMEND PC BOARD HOLE PATTERN  
PC BOARD THICKNESS: 1.6±0.1  
(NOT ACCUMULATE TOLERANCE)  
(CONNECTOR MOUNT SIDE)

NOTES  
1. MATERIAL: HOUSING: GLASS FILED THERMO PLASTIC, POLYESTER (94V-0), COLOR: BLACK  
CONTACT: COPPER ALLOY  
RETENTION LEG: COPPER ALLOY  
△2. FINISH (CONTACT AREA): 0.38 mMIN GOLD PLATING OVER Ni PLATING  
△3. FINISH (CONTACT AREA): 0.76 mMIN GOLD PLATING OVER Ni PLATING  
△4. FINISH (CONTACT AREA): 2.0 PLATED OVER NICKEL  
△5. FINISH (RETENTION LEG): TIN LEAD PLATED (CONTACT TAIL)  
△6. FINISH (RETENTION LEG): TIN PLATED (CONTACT TAIL)

注記  
1. 材料: ハウジング: ガラス入り熱可塑性ポリエステル樹脂 (94V-0), 色: 黒  
コンタクト: 銅合金  
リテンションレグ: 銅合金  
△2. めっき: コンタクト: 全面Ni下地 接触部: 0.38µm MIN金めっき  
△3. めっき: コンタクト: 全面Ni下地 接触部: 0.76µm MIN金めっき  
△4. めっき: コンタクト: 全面Ni下地 接触部: 2.0 µm MINスズめっき  
△5. めっき: リテンションレグとコンタクト半田付部: ニッケル下地の下に半田めっき  
△6. めっき: リテンションレグとコンタクト半田付部: ニッケル下地の下にスズめっき

KEYING LOCATION	A ROW KEYING	B ROW KEYING	FINISH	製品番号	PART NO.
B ROW	X	Y	△5 △4	3-316080-5	
A ROW	X	Y	△6 △3	3-316080-3	
A ROW	X	Y	△6 △2	3-316080-2	
B ROW	Y	Y	△6 △4	2-316080-5	
A ROW	Y	Y	△6 △3	2-316080-3	
A ROW	Y	Y	△6 △2	2-316080-2	
B ROW	X	X	△6 △4	1-316080-5	
A ROW	X	X	△6 △3	1-316080-3	
A ROW	X	X	△6 △2	1-316080-2	

TE Connectivity

10 POS DOUBLE ROW  
HORIZONTAL HDR ASS'Y FOR DYNAMIC D-3200

WIRE RANGE: mm²(AWG) - mm²  
INSULATION DIA: mm  
MATERIAL: SEE NOTE 注記参照  
FINISH: SEE NOTE 注記参照

NAME: 10 POS DOUBLE ROW HORIZONTAL HDR ASS'Y FOR DYNAMIC D-3200

一般公差 (GENERAL TOLERANCE): 10mm ±0.3, 10mm 3mm ±0.4, 30mm 100mm ±0.45, 角 ±0.3

SIZE: A3, LOC: J, NUMBER: C-316080

SCALE: 2-1, REV: B3, SHEET: 1 OF 1

B3	REVISED PER ECO-11-005030	RK	HMR	25MAR11
LTR	REVISION RECORD	DR	CHK	DATE

DR.	4/JUL/95	DE.	4/JUL/95
CHK.	K.IKEDA	APP.	K.IKEDA

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-316080-3](#)