


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW RELEASE PER ECO-14-008764	06-27-14	DM	DM

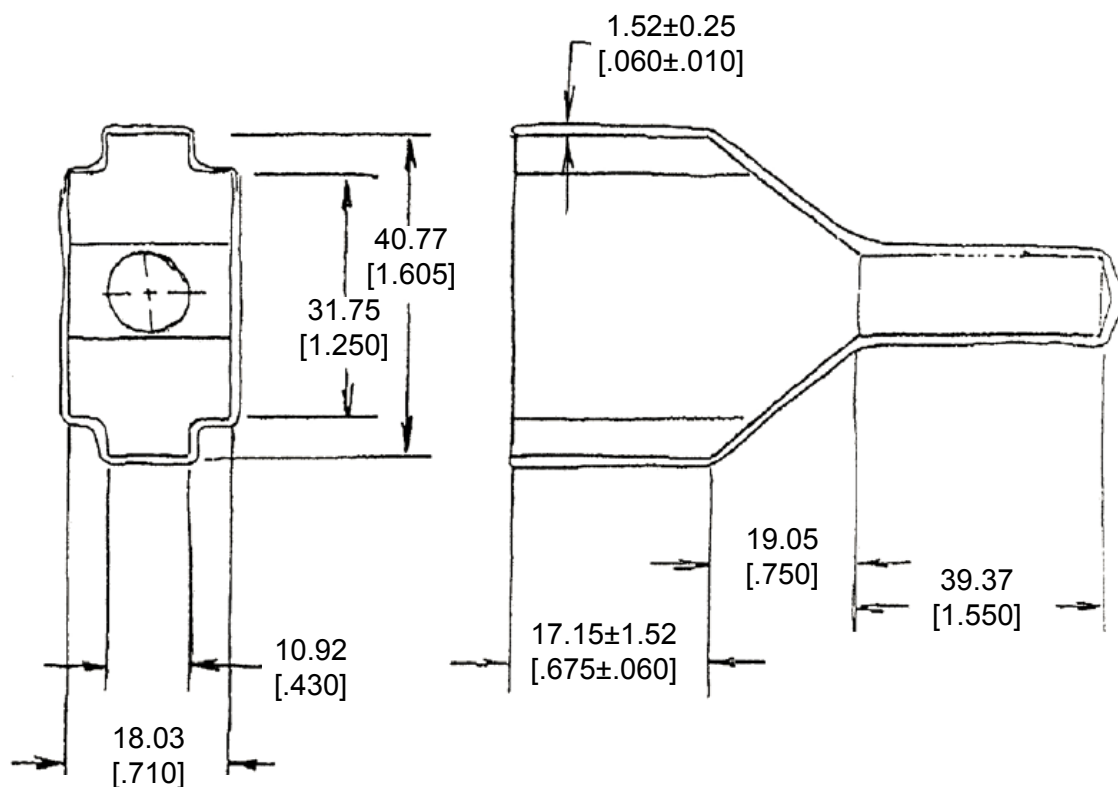

3. PART NO. DT12S-BT-BK

2. TEMPERATURE RATING: -29°C TO +100°C [-20°F TO +212°F]

1. THIS PART IS USED ON DT06-12SX (X=A,B,C,D KEYS) PLUG WITH ANY MODIFICATION THAT DOES NOT INCLUDE AN END CAP.

DIMENSIONS: MM [INCH]	DWN	D. MEYER 27JUN2014	MATERIAL	PVC	FINISH	BLACK				
	CHK	R. MESSENGER 27JUN2014	 TE Connectivity							
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	D. MEYER 27JUN2014								
0 PLC ±	PRODUCT SPEC	NAME BOOT, PLUG, 12PIN DT SERIES								
1 PLC ±	APPLICATION SPEC									
2 PLC ± 0.63 [.025]	WEIGHT	10.00 g	SIZE	A 4	CAGE CODE	4AFU8	DRAWING NO	C - DT12S-BT-BK	RESTRICTED TO	-
3 PLC ±	Customer Drawing									
4 PLC ±	SCALE NONE									
ANGLES ± 5°	SHEET 1 OF 1									
REV A										

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[DT12S-BT-BK](#)