


WAS P-73-6101

DIMENSIONS IN INCHES. DO NOT SCALE PRINT.

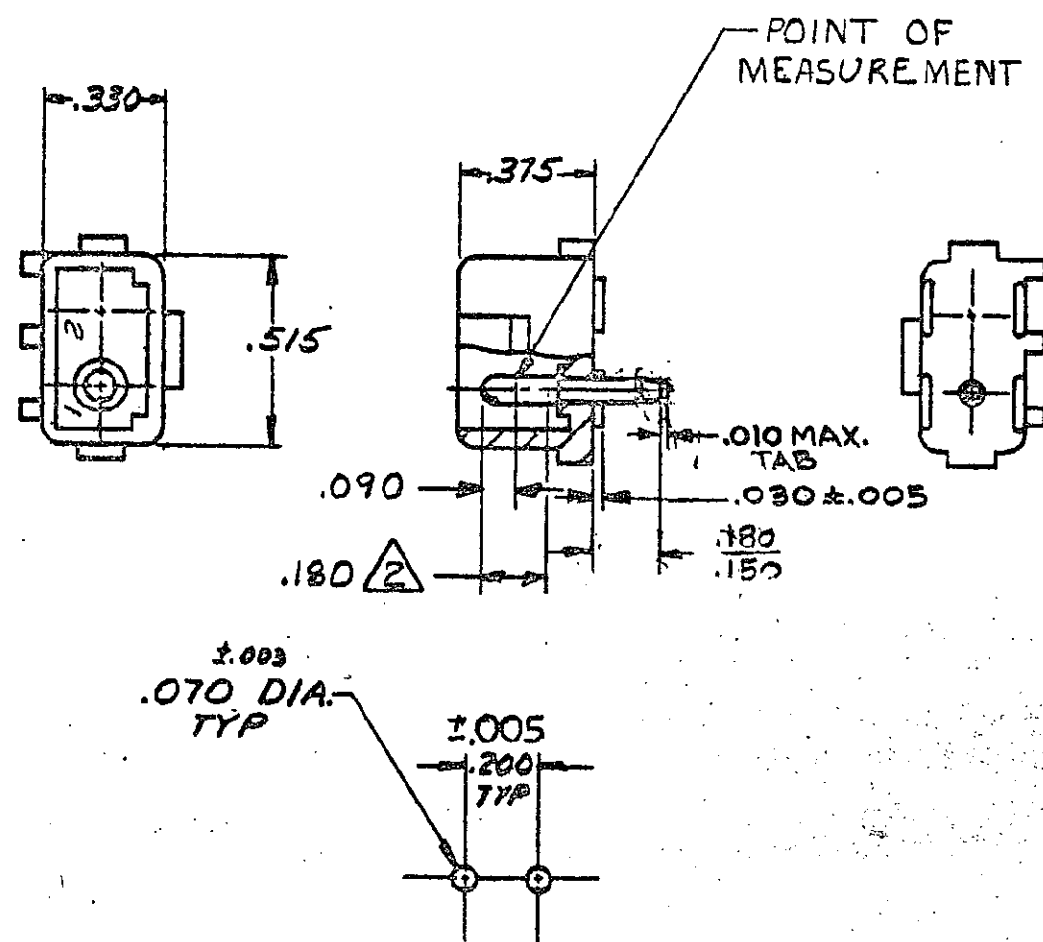

RECOMMENDED LAYOUT FOR
.062 THICK P.C. BOARD

1. PARTS COMPLY WITH TE SOLDERABILITY

SPEC. NO. 109-11-3

- 2 CONTACT IS PLATED OVERALL WITH .000050 NICKEL, THEN .000030 GOLD OVER CONTACT LENGTH INDICATED AND TIN PLATED ON SOLDER TAIL END.

	-2	- NATURAL	- GOLD Δ
6-	-1	- BLUE	- PRE TIN
2-	-1	- RED	-
350.539 -1	NYLON - NATURAL	COPPER ALLOY - PRE-TIN	
ASSEMBLY NO.	HSG MATL & COLOR	PIN MATL & FINISH	
© 1978 BY AMP INCORPORATED. ALL RIGHTS RESERVED. AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.		CUSTOMER COPY REFERENCE ONLY	
DR <i>g. Edwards</i>	MATERIAL AND FINISH SEE TABLE	TE TE Connectivity	
CHK <i>E.M. Feltner</i>	WIRE RANGE INSULATION	CLASS 084 DIA. PIN	
DE <i>J. Kunkle</i>	TOLERANCE EXCEPT AS NOTED ± .010	TYPE POSITIVE LOCK	
APP <i>J. Kunkle</i>	SCALE G	LOC CM B	REV N2
		NO 350539	
2 CIRCUIT MATE-N-LOK P.C. BOARD HEADER			

N2	REVISED PER ECR-13-008342	AV	RP	12NOV13
N1	REVISED PER ECO-11-005294	RK	HMR	08APR11
LTR	REVISION RECORD	EN	CHK	DATE

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[350539-2](#)