

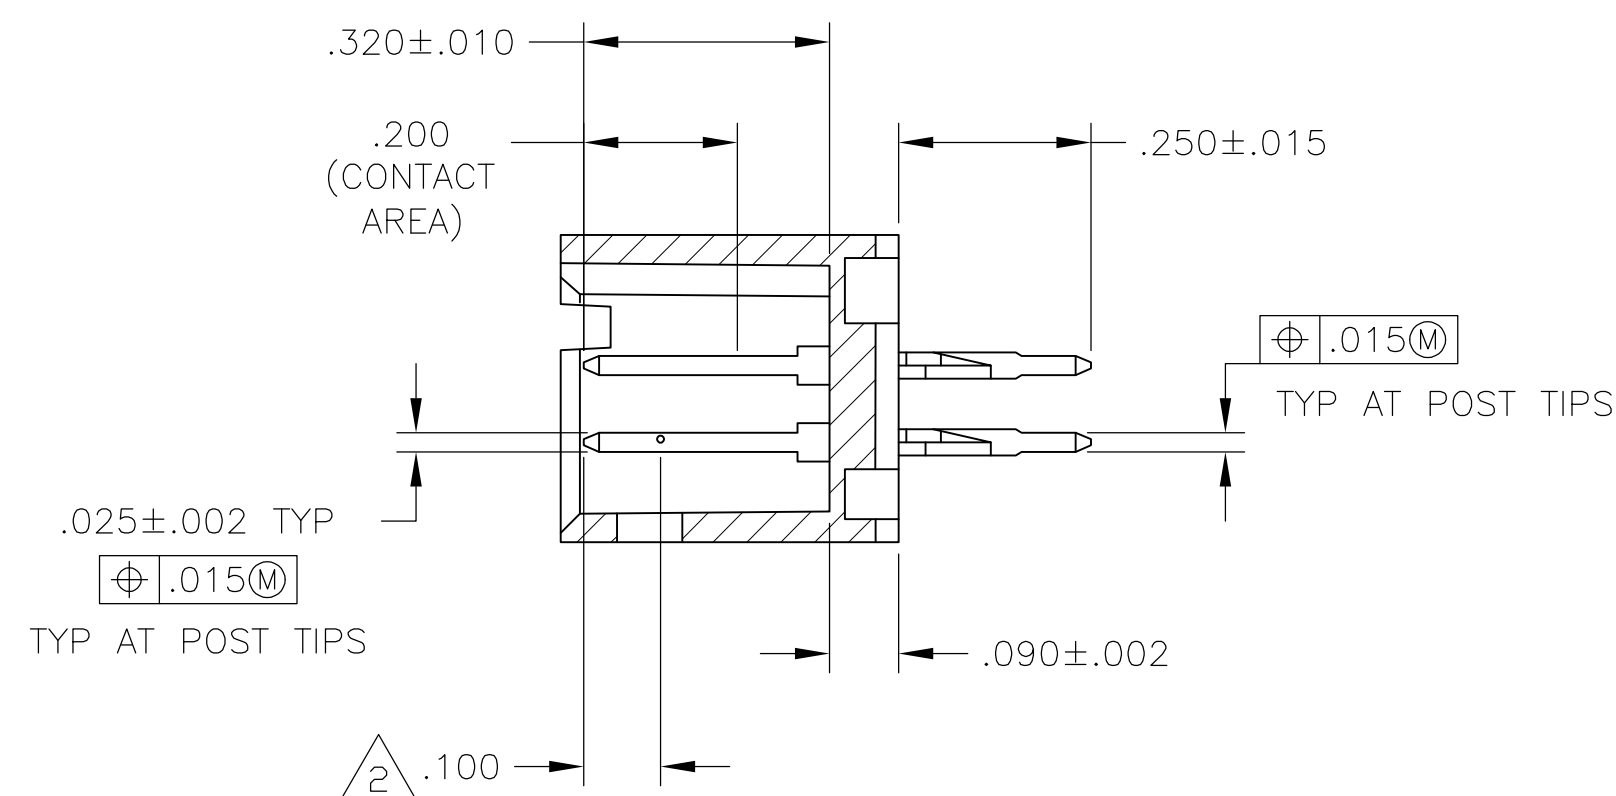
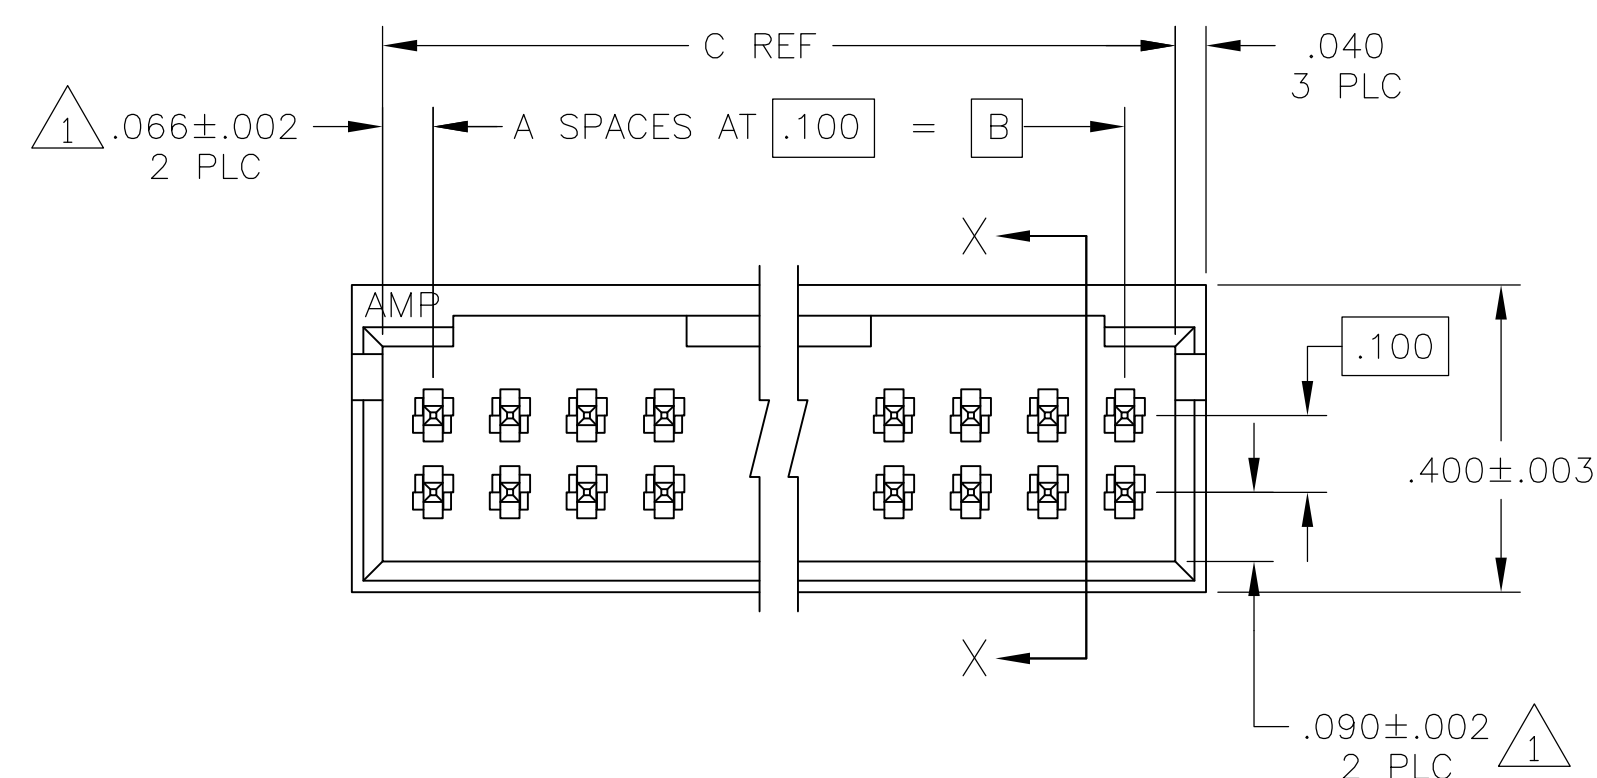
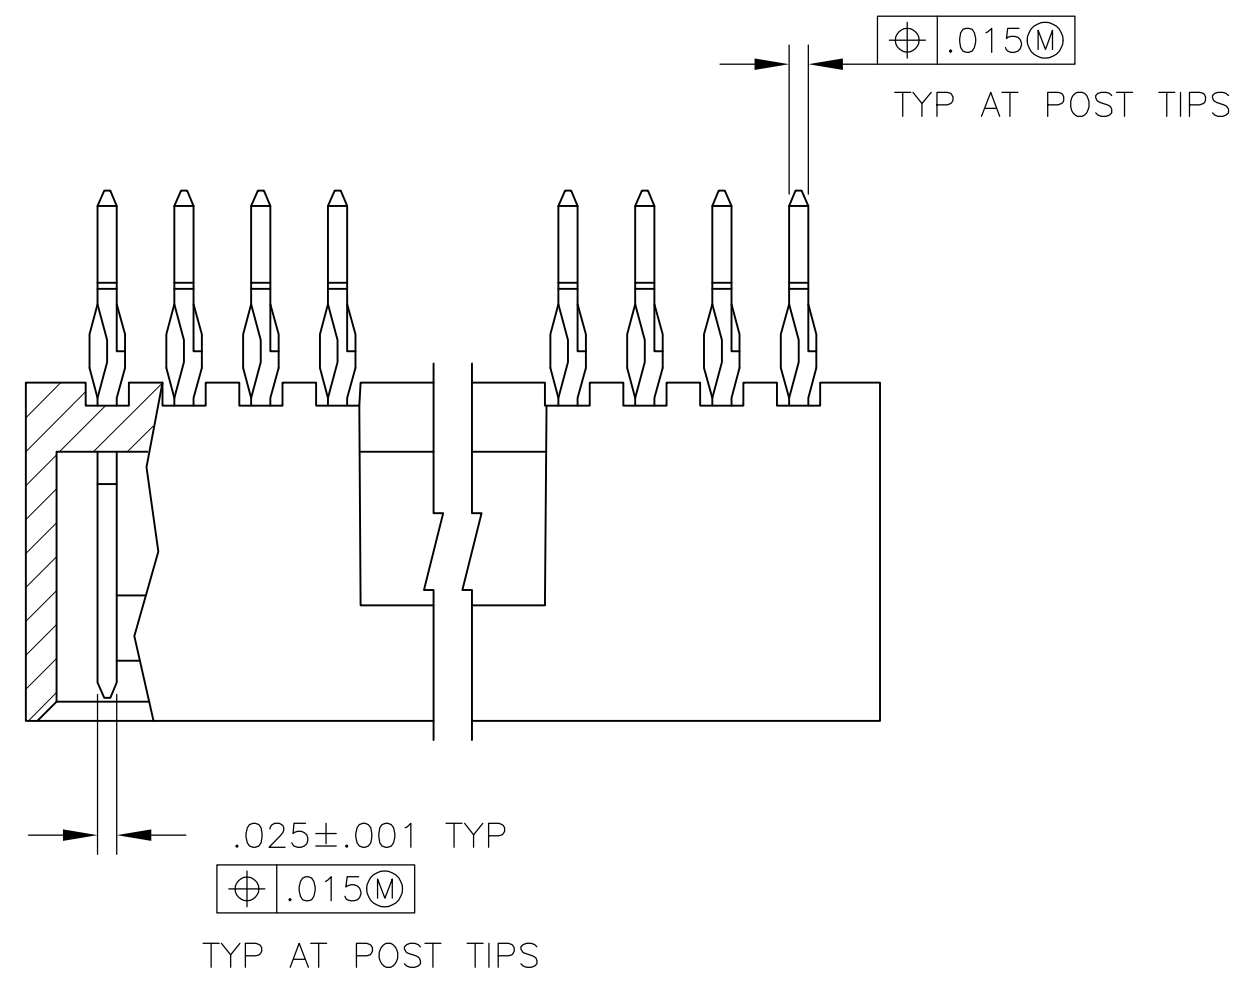


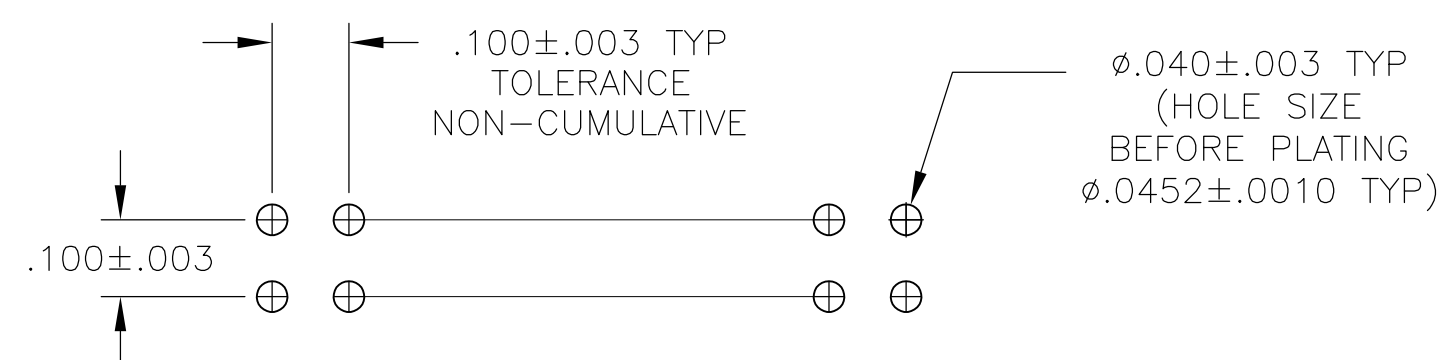

SECTION X-X

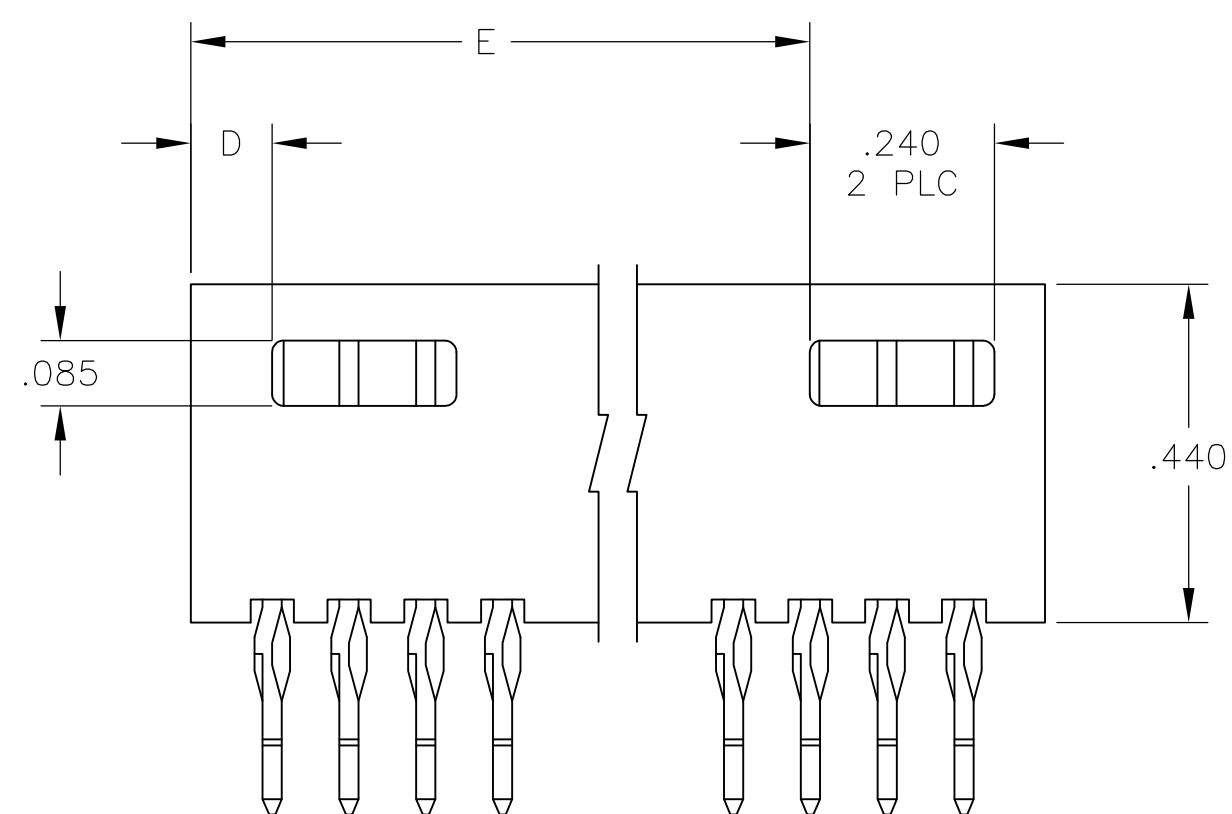


RECOMMENDED HOLE LAYOUT

- NOTES:

- 1 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 2 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 3 MATERIAL: HOUSING— FLAME RETARDANT THERMOPLASTIC, COLOR—BLACK
POSTS— COPPER ALLOY
- 4 FINISH: POSTS— .000030 GOLD ON CONTACT AREA,
.000100—.000200 MATTE TIN—LEAD ON SOLDER TAIL,
ALL OVER .000050 NICKEL
- 5 FINISH: POSTS— .000030 GOLD ON CONTACT AREA,
.000100—.000200 MATTE TIN ON SOLDER TAIL,
ALL OVER .000050 NICKEL
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

6	OBSOLETE	5	2.806	.106	3.032	2.900	29	60	7-102699-8		
		5	2.306	.106	2.532	2.400	24	50	7-102699-3		
		5	1.806	.106	2.032	1.900	19	40	6-102699-9		
		5	1.506	.106	1.732	1.600	16	34	6-102699-6		
		5	1.306	.106	1.532	1.400	14	30	6-102699-4		
		5	1.106	.106	1.332	1.200	12	26	6-102699-2		
		5	1.006	.106	1.232	1.100	10	24	6-102699-1		
		5	.806	.106	1.032	.900	9	20	5-102699-1		
		5	—	.406	.932	.800	8	18	5-102699-8		
		5	—	.306	.832	.700	7	16	5-102699-7		
		5	—	.306	.732	.600	6	14	5-102699-6		
		5	—	.206	.632	.500	5	12	5-102699-5		
		5	—	.206	.532	.400	4	10	5-102699-4		
		5	—	.106	.432	.300	3	8	5-102699-3		
		5	—	.106	.332	.200	2	6	5-102699-2		
6	OBSOLETE	4	2.806	.106	3.032	2.900	29	60	2-102699-8		
	OBSOLETE	4	2.706	.106	2.932	2.800	28	58	2-102699-7		
	OBSOLETE	4	2.606	.106	2.832	2.700	27	56	2-102699-6		
	OBSOLETE	4	2.506	.106	2.732	2.600	26	54	2-102699-5		
	OBSOLETE	4	2.406	.106	2.632	2.500	25	52	2-102699-4		
		4	2.306	.106	2.532	2.400	24	50	2-102699-3		
	OBSOLETE	4	2.206	.106	2.432	2.300	23	48	2-102699-2		
	OBSOLETE	4	2.106	.106	2.332	2.200	22	46	2-102699-1		
	OBSOLETE	4	1.906	.106	2.132	2.000	20	42	2-102699-0		
		4	1.806	.106	2.032	1.900	19	40	1-102699-9		
	OBSOLETE	4	1.706	.106	1.932	1.800	18	38	1-102699-8		
	OBSOLETE	4	1.606	.106	1.832	1.700	17	36	1-102699-7		
		4	1.506	.106	1.732	1.600	16	34	1-102699-6		
	OBSOLETE	4	1.406	.106	1.632	1.500	15	32	1-102699-5		
		4	1.306	.106	1.532	1.400	14	30	1-102699-4		
6	SUP BY 6-102699-6		4	1.206	.106	1.432	1.300	13	28	1-102699-3	
			4	1.106	.106	1.332	1.200	12	26	1-102699-2	
		OBSOLETE	4	1.006	.106	1.232	1.100	11	24	1-102699-1	
		OBSOLETE	4	.906	.106	1.132	1.000	10	22	1-102699-0	
			4	.806	.106	1.032	.900	9	20	102699-9	
			4	—	.406	.932	.800	8	18	102699-8	
			4	—	.306	.832	.700	7	16	102699-7	
			4	—	.306	.732	.600	6	14	102699-6	
			4	—	.206	.632	.500	5	12	102699-5	
			4	—	.206	.532	.400	4	10	102699-4	
			4	—	.106	.432	.300	3	8	102699-3	
			4	—	.106	.332	.200	2	6	102699-2	
		OBSOLETE	4	2.006	.106	2.232	2.100	21	44	102699-1	
				FINISH	E	D	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R BROWN 14APR05 CHK R BROWN 14APR05		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± .005 4 PLC ± — 4 ANGLES ± —		NAME HDR ASSY, MOD II, COMPLIANT PIN, DBL ROW, .100x.100 CL, 4 SIDE SHROUD	
		APVD J GESFORD 14APR05 PRODUCT SPEC — APPLICATION SPEC —		SIZE A1	
MATERIAL —		FINISH SEE TABLE		CAGE CODE 00779	
		WEIGHT —		DRAWING NO 102699	
		CUSTOMER DRAWING		SCALE 4:1	
				SHEET 1 of 1	
				REV K4	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-102699-6](#)