




(2,00 mm) .0787"

(2,54 mm) .100"

BTMM, BSW SERIES

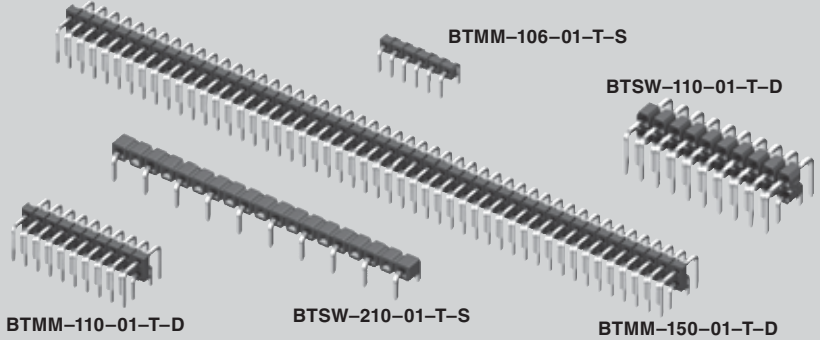

LOW PROFILE SQUARE POST JUMPER

SPECIFICATIONS

For complete specifications see www.samtec.com?BTMM

Insulator Material:

Black Liquid Crystal Polymer

Terminal Material:

Phosphor Bronze

Plating:

Sn over 50µ" (1,27 µm) Ni

Operating Temp Range:


-55°C to +105°C

RoHS Compliant:

Yes

Lead-Free Solderable:

Yes

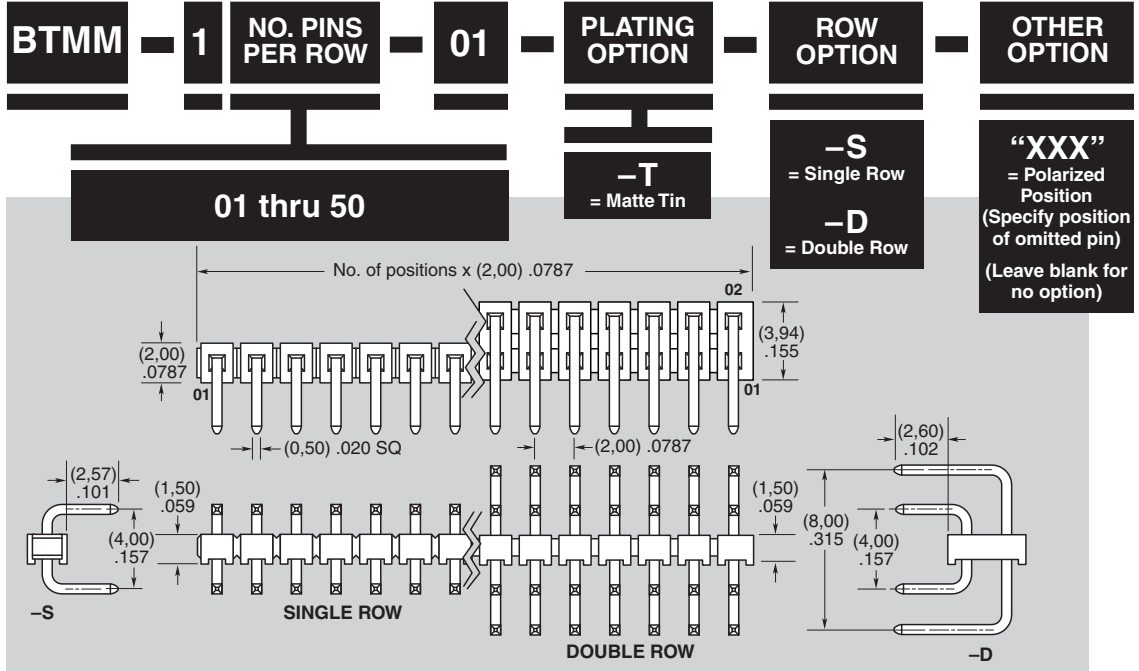

Note: Some sizes, styles and options are non-standard, non-returnable.

SPECIFICATIONS

For complete specifications see www.samtec.com?BTSW

Insulator Material:

Black Glass Filled Polyester

Terminal Material:

Phosphor Bronze

Plating:

Sn over 50µ" (1,27 µm) Ni

Operating Temp Range:


-55°C to +105°C

RoHS Compliant:


Yes

Lead-Free Solderable:

Wave Only

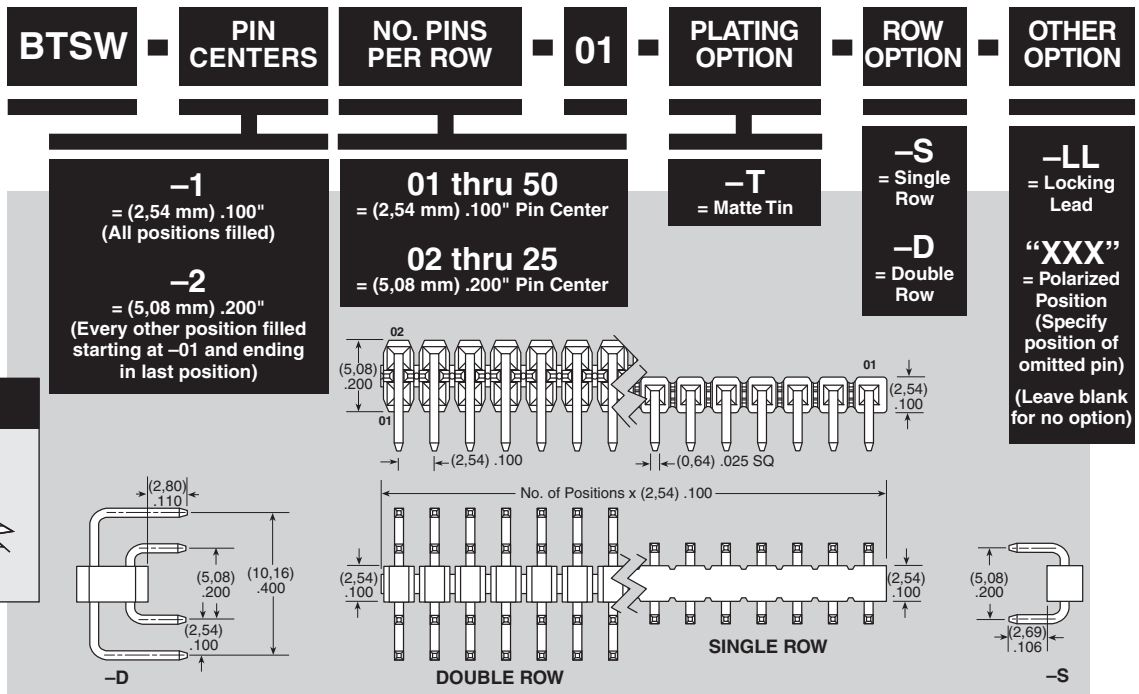

APPLICATION



Note: Some sizes, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Samtec:

[BTSW-102-01-T-S](#) [BTSW-104-01-T-D](#) [BTSW-105-01-T-S](#) [BTSW-108-01-T-S](#) [BTSW-110-01-T-D](#) [BTSW-120-01-T-S](#)
[BTSW-107-01-F-S](#) [BTSW-150-01-T-D](#) [BTSW-150-01-T-S](#) [BTSW-112-01-T-D](#) [BTSW-204-01-T-S](#) [BTSW-101-01-T-](#)
[S-LL](#) [BTSW-103-01-T-D](#) [BTSW-104-01-F-S](#) [BTSW-115-01-T-S](#) [BTSW-207-01-T-S-LL](#) [BTSW-110-01-T-S](#) [BTSW-](#)
[115-01-F-D](#) [BTSW-115-01-T-D-LL](#) [BTSW-150-01-T-D-LL](#) [BTSW-202-01-F-S](#) [BTSW-212-01-T-S](#) [BTSW-106-01-T-D](#)
[BTSW-108-01-T-D](#) [BTSW-110-01-F-D](#) [BTSW-110-01-T-S-004](#) [BTSW-106-01-T-S](#) [BTSW-107-01-T-D](#) [BTSW-104-01-](#)
[T-S](#) [BTSW-120-01-T-D](#) [BTSW-118-01-T-S](#) [BTSW-103-01-F-S-LL](#) [BTSW-103-01-T-S](#) [BTSW-112-01-T-S](#) [BTSW-115-](#)
[01-T-D](#) [BTSW-150-01-F-S](#) [BTSW-101-01-F-S](#) [BTSW-150-01-F-D](#) [BTSW-107-01-T-S](#) [BTSW-205-01-T-S](#)