

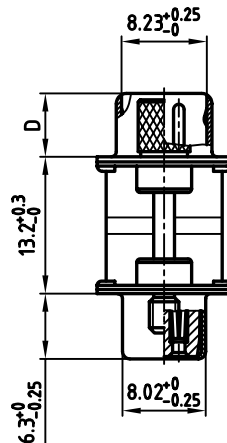
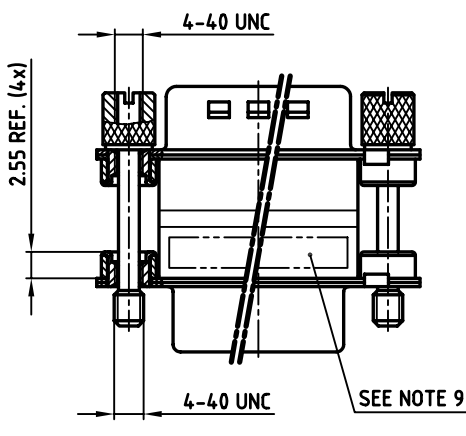


used for: FULL METAL π -FILTER

POS.	A _{-0.76}	B1 _{-0.25}	B2 _{+0.25}	C	D _{-0.3}
9	31.19	16.46	16.79	25.00 ^{+0.12} _{-0.13}	6.12
15	39.52	24.79	25.12	33.30 ^{+0.15} _{-0.1}	6.12
25	53.42	38.50	38.84	47.04 ^{+0.13}	5.99
37	69.70	54.96	55.30	63.50 ^{+0.13}	5.99

POS.	PART NO. SOCKET CONNECTOR / PLUG CONNECTOR 4-40 UNC			
	2 x 180pF $\pm$ 20%	2 x 370pF $\pm$ 20%	2 x 830pF $\pm$ 20%	2 x 1300pF $\pm$ 20%
9	MAP1XAAAR02R361X	MAP1XAAAR02R741X	MAP1XAAAR02R162X	MAP1XAAAR02R262X
15	MAP2XAAAR02R361X	MAP2XAAAR02R741X	MAP2XAAAR02R162X	MAP2XAAAR02R262X
25	MAP3XAAAR02R361X	MAP3XAAAR02R741X	MAP3XAAAR02R162X	MAP3XAAAR02R262X
37	MAP4XAAAR02R361X	MAP4XAAAR02R741X	MAP4XAAAR02R162X	MAP4XAAAR02R262X

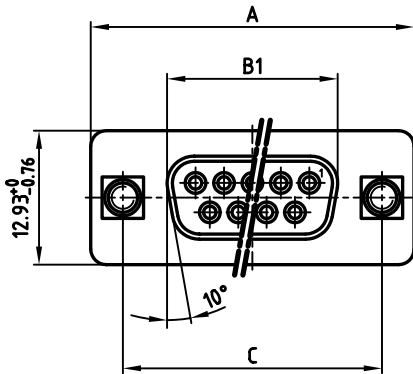

NOTES:

- METALSHELLS: STEEL; min. 320 μ " TIN
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY
PLATING: 8 μ " HARD GOLD OVER min. 50 μ " NICKEL
- THREADED INSERT: COPPER ALLOY; min. 200 μ " TIN over 80 μ " NICKEL
- COLLAR: COPPER ALLOY; min. 200 μ " TIN over 80 μ " NICKEL
- CAPACITANCE: SEE TABLE
- DIELECTRIC WITHSTANDING VOLTAGE: 300 VDC
- MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
- CONNECTOR IS PART MARKED: PART-NO. CONEC ABC

Directive 2002/95/EC
„RoHS“
Compliant

APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON	APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON	APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY, WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance		
2003	date	name
drawn	24.01.	Parei
appd.	24.01.	Kühle
norm		
d-old		

scale: 2:1	material: SEE NOTES
title: FULL METAL π-FILTER ADAPTER PLUG / SOCKET 9-37pos. with jack screws - 4-40 UNC	
dwg no: AutoCAD 2000	DIN-A 3
sh: 1/1	
part no: SEE TABLE	24K1A357

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

CONEC:

[MAP1XAAAR02R262X](#) [MAP2XAAAR02R262X](#)