


- 1 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- 2 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS.
- 3.000100-.000200 MATTE TIN-LEAD OVER .000050 NICKEL.
- 4.000100-.000200 BRIGHT TIN OVER .000050 NICKEL.

В

А


4805 (1/15)

- 25 PRELIMINARY PART NOT RELEASED FOR PRODUCTION.
- 6 HOUSING MATERIAL: FLAME RETARDANT THERMOPLASTIC; COLOR-BLACK.
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

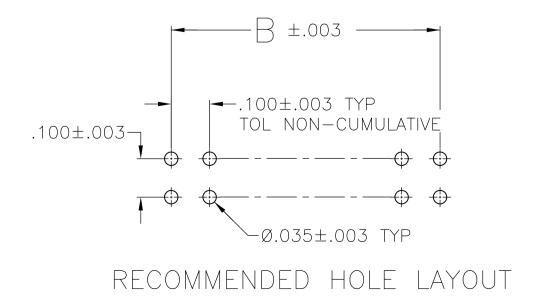

SUPERSEDED

4



	5 4	1.684	1.600	16	34	4-103328-9	
	5 4	1.284	- 1.200	12	26	4-103328-8	
	4	.884	.800	8	18	4-103328-7	
/ OBSOLETE	4	.584	.500	5	12	-4-103328-6-	
<u> </u>	5 4	3.984	3.900	39	80	4-103328-5	
	4	.984	.900	9	20	4-103328-4	
	4	.684	.600	6	14	4-103328-3	
	4	.284	.200	2	6	4-103328-2	(
	4	.084			2	4-103328-1	
	3	3.984	3.900	39	80	4-103328-0	
/ OBSOLETE	3	3.884	3.800	38	78	-3-103328-9-	
/ OBSOLETE	3	3.784	3.700	37	76	-3-103328-8-	
/ OBSOLETE	3	3.684	3.600	36	74	-3-103328-7-	
/ OBSOLETE	3	3.584	3.500	35	72	-3-103328-6-	
	3	3.484	3.400	34	70	3-103328-5	
A OBSOLETE		3.384	3.300	33	68	-3-103328-4-	
OBSOLETE	3	3.284	3.200	32	66	-3-103328-3-	
OBSOLETE	3	3.184	3.100	31	64	-3-103328-2-	
OBSOLETE	3	3.084	3.000	30	62	-3-103328-1-	
OBSOLETE		2.984	2.900	29	60	-3-103328-0-	
OBSOLETE		2.884	2.800	28	58	-2-103328-9-	
A OBSOLETE	(<u>```</u> `	2.784		27	56	-2-103328-8-	
A OBSOLETE	(<u>```</u> `	2.684	2.600	26	54	-2-103328-7-	
A OBSOLETE	<u> </u>	2.584	2.500	25	52	-2-103328-6-	
<u>/</u> / \	3	2.484		24	50	2-103328-5	
A OBSOLETE	3	2.384		23	48	-2-103328-4	
/ OBSOLETE	<u> </u>	2.284		22	46	-2 - 103328 - 3	
OBSOLETE		2.184		21	44	-2-103328-2	
OBSOLETE		2.084		20	42	-2 - 103328 - 1	
		1.984		19	40	2-103328-0	
A OBSOLETE		1.884		18	38	-1-103328-9	E
OBSOLETE		1.784		17	36	-1-103328-8	
		1.684		16	34	1-103328-7	
		1.584		15	32	1-103328-6	
A OBSOLETE		1.484		14	30	-1-103328-5	
		1.384		13	28	1-103328-4	
		1.284		12	26	1-103328-3	
		1.184		1 1	24	1-103328-2	
BY 6-146254-	1 $\overline{)}$	1.084		10	22	-1-103328-1	
DI 0 140204		.984	.900	9	20	1-103328-0	
		.884	.800	8	18	103328-9	
		.784	.700	7	16	103328-8	
		.684	.600	6	14	103328-7	
		.584	.500	5	12		
		.484	.400	4	10	103328-6	
		.384	.300		8	103328-5	
		.284	.200	2	6	103328-4	
		.184	.100		4	103328-3	
		.084			2	103328-2	
	/3	1.004			∠	103328-1	
	PLATING	C	В	A	NO OF POSN	PART NUMBER	4
CONTROLLED DOCUMENT.	dwn J.MARTINELLI chk JOHN KNITTLE	10/15/92 23NOV92		E TE	TE C	onnectivity	
TOLERANCES UNLESS OTHERWISE SPECIFIED:	apvd B. FLINCHBAUG		ame ASSEM	BLY. HFAF	DER. BRFAK	AWAY, MOD II,	
0 PLC ± - 1 PLC ± -	PRODUCT SPEC			ROW, .10	DO X .100	C/L, VERTICAL,	
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	APPLICATION SPEC				5 SQUARE I		
4 PLC ± – ANGLES ± – FINISH	 WEIGHT	,	A 1 00779 C= 103328 -				
SEE TABLE	—	· · · · · · · · · · · · · · · · · · ·	\1 00779				
	CUSTOMER DRA	AWING		5	4:1 SH	I I P5	I

 P
 LTR
 DESCRIPTION
 DATE
 DWN
 APVD

 P5
 REVISED PER ECO-16-012733
 01SEP2016
 NK
 MM

D

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: 4-103328-4