

EK-26899-P03

SHT 1.1




NOTES:

1. INCREASED PRESSURE AT THE SOUND INLET CAUSES A POSITIVE GOING VOLTAGE TO APPEAR AT THE OUTPUT TERMINAL, RELATIVE TO THE NEGATIVE TERMINAL.

2. WIRES MAY BE CURVED WITH ENDS 0,64 [.025] MAXIMUM AWAY FROM NORMAL, BUT NOT KINKED.

3 DIMENSIONS AT EXIT FROM SOLDER.

4 LOCATED FROM TWO SURFACES FOR CUSTOMER CONVENIENCE. ONLY APPLICABLE FROM ONE SURFACE, NOT TO BE USED TOGETHER.

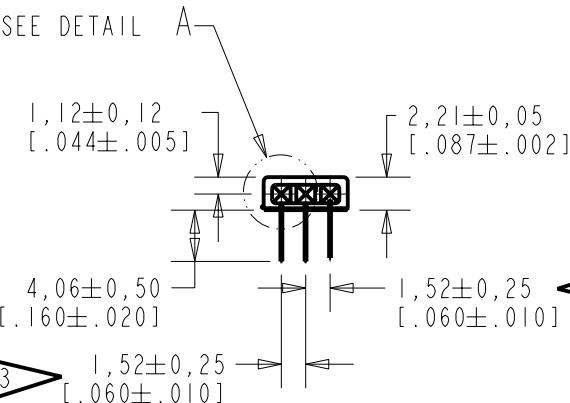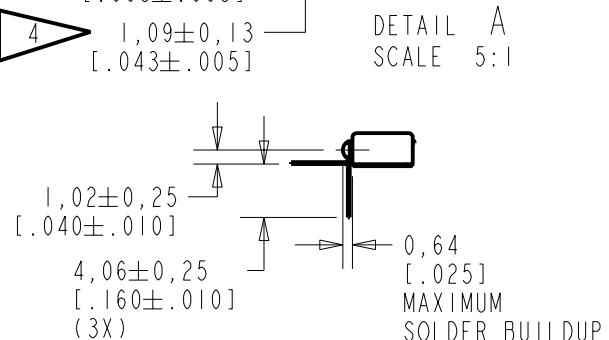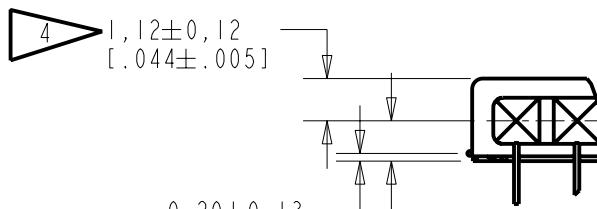

DIMENSIONS IN MILLIMETERS [INCHES]


NOMINAL WEIGHT  
.13 GRAMS

KNOWLES ELECTRONICS  
ITASCA, ILLINOIS U.S.A.

Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
D	M10101478	6-5-07	Released	D

SCALE:	2:1	DR. BY	DATE
	DO NOT SCALE DRAWING	LSY	6-19-06
TITLE:	MICROPHONE	CK. BY	DATE
	EK-26899-P03	GJP	6-26-06
	OUTLINE DRAWING	APP. BY	DATE
		GJP	6-26-06

SENSITIVITY IN dB RELATIVE TO 1.0 VOLT/0.1 Pa (N/m<sup>2</sup>)  
FOR CONDITIONS SHOWN BELOW.

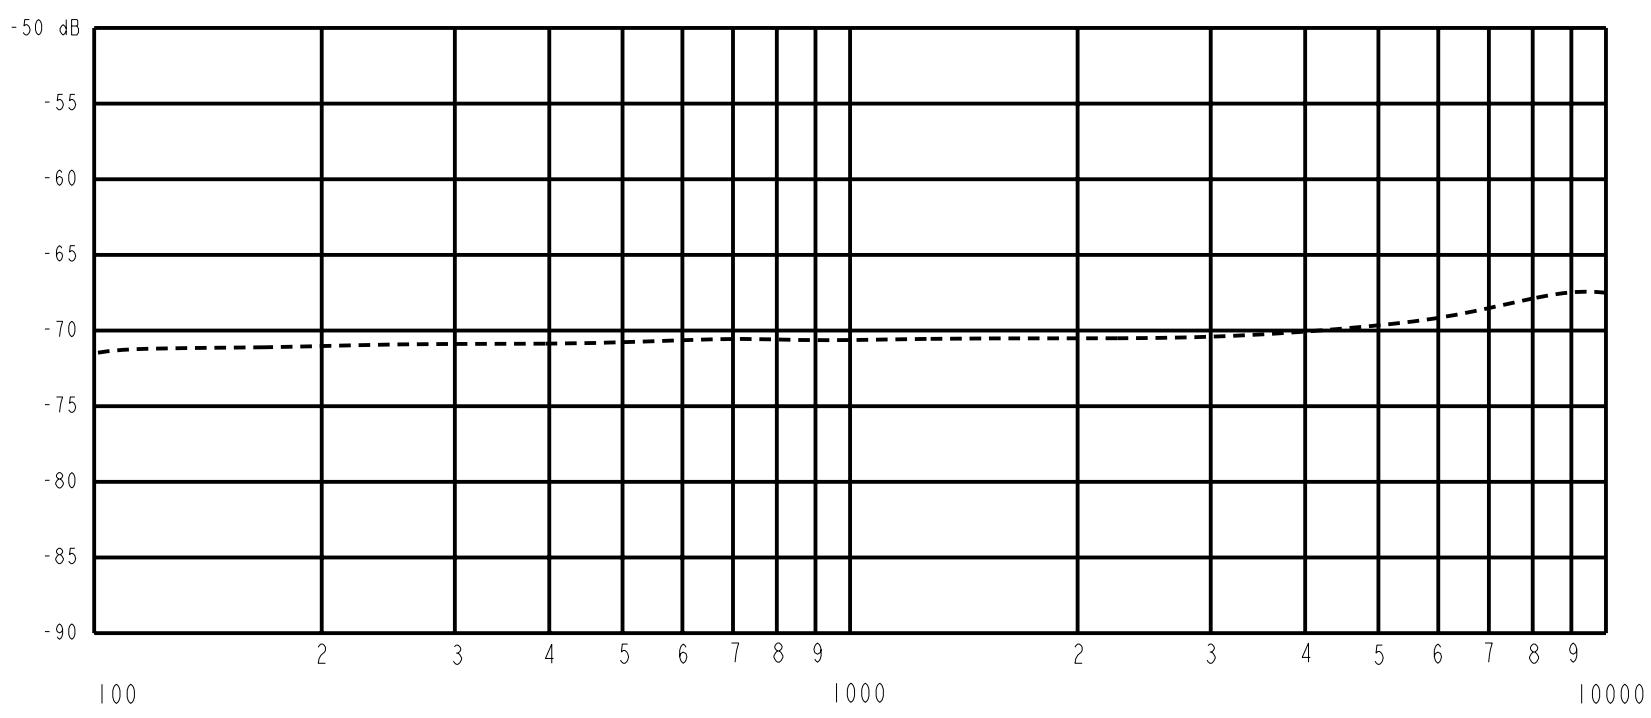


FREQUENCY	SENSITIVITY			DEVICE CONFORMITY		
	MIN.	NOM.	MAX.	RANGE OF DEVIATION FROM 1KHz		
100	---	-71.5	---	-4.0	+1.0	
1000	-73.0	-71.0	-69.0	0.0	0.0	
10000	---	-68.5	---	-0.5	+8.5	

NOTES:

1. ALL TEST DATA TAKEN WITH TEST CIRCUIT SHOWN BELOW.
2. CASE CONNECTED TO NEGATIVE TERMINAL USING EXTERNAL JUMPER WIRE.
3. MICROPHONE TO BE FUNCTIONAL WITH 10 VDC SUPPLY.
4. CONFORMS TO REQUIREMENTS SHOWN ON 'ELECTRET MICROPHONE ENVIRONMENTAL QUALIFICATIONS TEST, EK-PA SHEET 2.2' WITH REF. FREQ. 1000 Hz.
5. TYPICAL SENSITIVITY TO HUMIDITY AT 1000 Hz IS 0.02 dB/%RH.
6. SENSITIVITY AND NOISE VALUES INDICATED ON THIS SPECIFICATION ARE VALID AT 50% HUMIDITY.

PORT LOCATION	DC SUPPLY	AMPLIFIER CURRENT DRAIN	SENSITIVITY CHANGE ON REDUCING SUPPLY TO 0.9VDC	"A" WEIGHTED NOISE (1 kHz EQUIV. SPL)
KA	1.3V	50 $\mu$ A MAX.	4.0 dB MAX.	40.0 dB MAX.

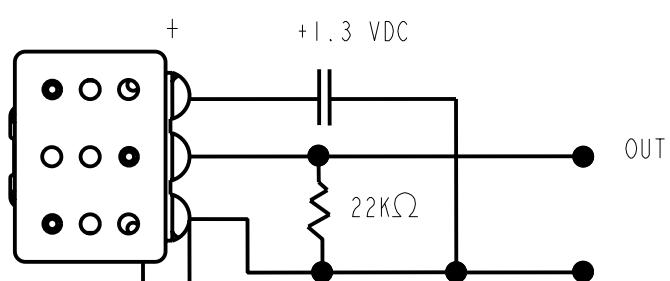

TEST CIRCUIT

Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
D	M10101478	6-5-07	Released	D

KNOWLES ELECTRONICS  
ITASCA, ILLINOIS U.S.A.

WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR ELIMINATION OF EQUIPMENT AND TEST METHOD VARIATION

TITLE:	MICROPHONE	EK-26899-P03
PERFORMANCE SPECIFICATION		SHT 2.1

DR. BY	DATE
LSY	6-19-06
CK. BY	DATE
GJP	6-26-06
APP. BY	DATE
GJP	6-26-06

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Knowles:](#)

[EK-26899-P03](#)