

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0760485001](#)
Status: **Active**
Overview: [SFP+ and SFP Interconnect Solutions](#)
Description: Small Form-factor Pluggable Plus (SFP+) Stacked 2-by-6 Multi-Port Connector with 4 Lightpipe Ports, EMI Metal Gasket, 240 Circuits, Tin (Sn) Tails

Documents:
[3D Model](#) [Application Specification AS-76090-001-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [Packaging Specification PK-75451-001-001 \(PDF\)](#)
[Application Specification AS-75310-001-001 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


CSA LR19980
UL E29179

General

Product Family I/O Connectors
Series [76048](#)
Application Module-to-Board
Component Type Receptacle
Electrical Model Yes
Overview [SFP+ and SFP Interconnect Solutions](#)
Product Name SFP Plus, SFP+
Type N/A
UPC 800756877402

Physical

Boot Color N/A
Circuits (Loaded) 240
Circuits (maximum) 240
Circuits Detail 240
Color - Resin Black, Clear (Blue Tint)
Durability (mating cycles max) 100
Flammability 94V-0
Gender Female
Keying to Mating Part None
Lock to Mating Part Yes
Material - Metal High Performance Alloy (HPA)
Material - Plating Mating Gold
Material - Plating Termination Tin
Material - Resin High Temperature Thermoplastic, Polycarbonate
Net Weight 141.468/g
Number of Rows 2
Orientation Right Angle
PC Tail Length 2.07mm
PCB Locator Yes
PCB Retention Yes
PCB Thickness - Recommended 1.57mm
Packaging Type Tray
Panel Mount No
Pitch - Mating Interface 0.80mm
Pitch - Termination Interface 0.80mm
Plating min - Mating 0.762µm
Plating min - Termination 0.762µm
Polarized to Mating Part Yes
Polarized to PCB Yes
Ports 12

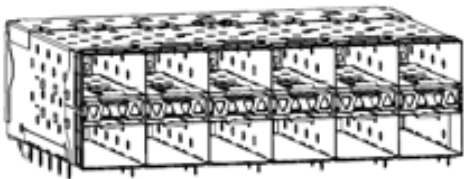

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per -
ED/61/2018 (27 June
2018)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

[76048](#) Series

Use With

[75951-0999](#) SFP Dust Plug

Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40° to +85°C
Termination Interface: Style	Through Hole - Compliant Pin
Waterproof / Dustproof	No
Electrical	
Current - Maximum per Contact	0.5A
Grounding to Panel	None
Shield Type	EMI Gasket
Shielded	Yes
Voltage - Maximum	120V AC (RMS)/DC
Solder Process Data	
Lead-freeProcess Capability	N/A
Material Info	
Reference - Drawing Numbers	
Application Specification	AS-75310-001-001, AS-76090-001-001
Electrical Model Document	EE-76090-001
Packaging Specification	PK-75451-001-001
S-Parameter Model	SP-76090-001
Sales Drawing	SD-76048-001

This document was generated on 10/11/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[76048-5001](#)