



PART NUMBER	LCD-H501C39TF	REV.	B
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
02.07.07	E.C.N. #11148.		A
12.18.12	E.C.N. #10BRDR. & REDRAWN.		B

A

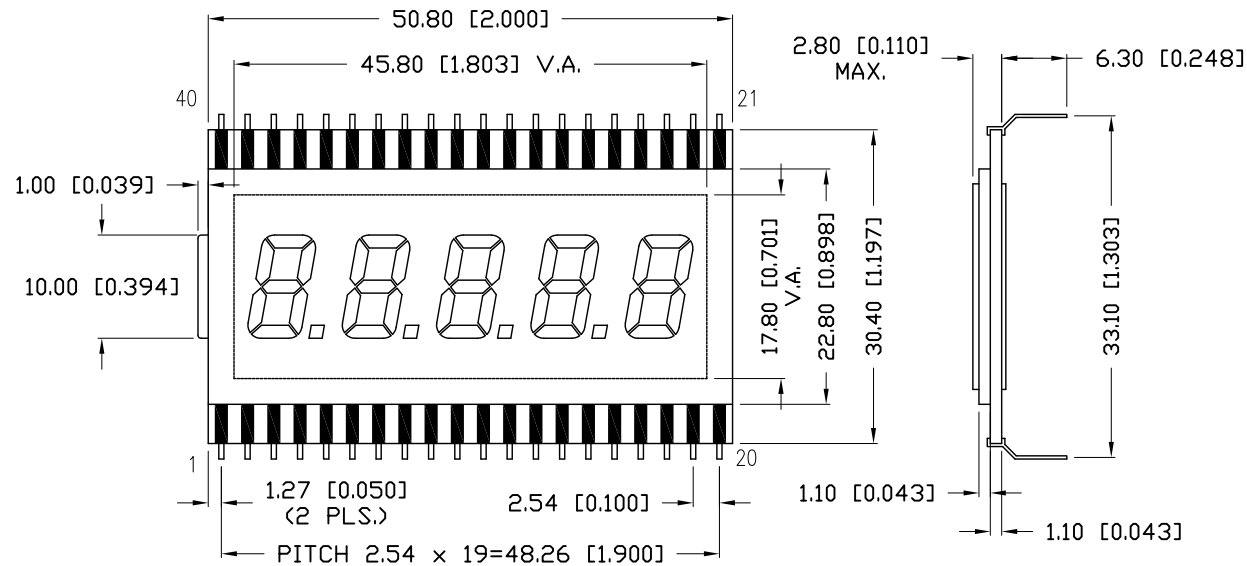

CHARACTERISTICS	
FLUID TYPE:	TN
BACKGROUND COLOR:	GRAY
VIEWING DIRECTION:	6:00
DISPLAY MODE:	TRANSFLECTIVE
OPERATING VOLTAGE:	5.0V A.C.
OPERATING TEMP.	-30°C to 75°C
STORAGE TEMP.	-40°C to 80°C
DRIVING METHODE:	STATIC
CONNECTION TYPE:	40 PINS

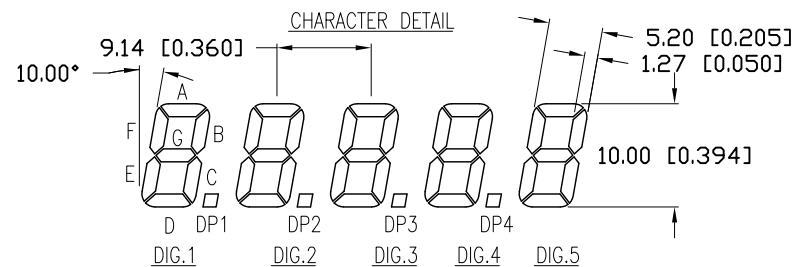

PIN NO.	1	2	3	4	5	6	7	8	9	10
SEGMENT	COM	1G	1E	1D	1C	2E	2D	2C	3E	3D
PIN NO.	11	12	13	14	15	16	17	18	19	20
SEGMENT	3C	DP3	4E	4D	4C	DP4	5E	5D	5C	5B
PIN NO.	21	22	23	24	25	26	27	28	29	30
SEGMENT	5A	5F	5G	4B	4A	4F	4G	3B	3A	3F
PIN NO.	31	32	33	34	35	36	37	38	39	40
SEGMENT	3G	DP2	2B	2A	2F	2G	DP1	1B	1A	1F

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= $\begin{matrix} +\text{DECIMAL PRECISION} \\ -0.00 \end{matrix}$ MAX= $\begin{matrix} +0.00 \\ -\text{DECIMAL PRECISION} \end{matrix}$

UNCONTROLLED DOCUMENT



425 N. GARY AVE.
CAROL STREAM, IL 60188-4900
PHONE: +1.800.278.5666
FAX: +1.630.315.2152
WEB: WWW.LUMEX.COM
MEMBER OF **ITW PHOTONICS**

0.39" CHARACTER HEIGHT, FIVE DIGIT LCD GLASS, TN, TRANSFLECTIVE, 40 PINS, -30°C TO +75°C OPER. TEMP.

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE: 12.18.12	DRAWN BY: MA
PAGE: 1 OF 1	CHKD BY: SS
SCALE: NTS	APRVD BY: SS
UNIT: mm [INCH]	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Lumex:](#)

[LCD-H501C39TF](#)