


Product data sheet

Characteristics

XZCRA150941J2

jumper cable XZ - male straight M12 4-pin - female straight M8 4-pin - PVC 2m

Product availability: Non-Stock - Not normally stocked in distribution facility

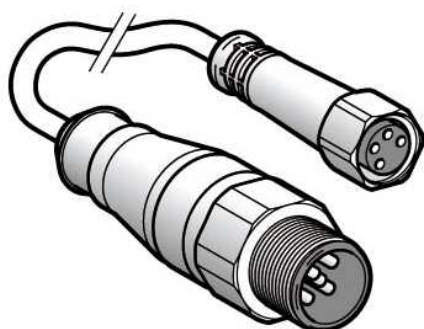

Main

Commercial Status	Commercialised
Accessory / separate part category	Cabling accessories
Accessory / separate part type	Jumper cable
Jumper cable end 1	M12 male 4 pins straight connector with screw-on and clip-on
Jumper cable end 2	M8 female 4 pins straight connector with screw-on and clip-on

Complementary

Collar material	Metal
Cable composition	4 x 0.34 mm ²
Cable length	6.56 ft (2 m)
Cable outer diameter	0.21 in (5.3 mm)
[Ue] rated operational voltage	75 V DC 60 V AC
[In] rated current	4 A
Insulation resistance	>= 1000 MOhm
Resistance across terminals	<= 5000 mOhm
Product weight	0.22 lb(US) (0.1 kg)

Environment

IP degree of protection	IP68
Ambient air temperature for operation	-13...185 °F (-25...85 °C) (static)

Ordering and shipping details

Category	22483 - MACHINE CABLES
Discount Schedule	DS3
GTIN	003389119021654
Nbr. of units in pkg.	1
Package weight(Lbs)	0.23
Product availability	Non-Stock - Not normally stocked in distribution facility
Returnability	N
Country of origin	DE

Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS	Compliant - since 0601 - Schneider Electric declaration of conformity

Contractual warranty

Period	18 months
--------	-----------

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Schneider Electric:](#)

[XZCRA150941J2](#)