


C-CD-803 -01

- | | | |
|----|---|------|
| 02 | = | .094 |
| 04 | = | .119 |
| 06 | = | .146 |
| 08 | = | .173 |
| 10 | = | .198 |
| 14 | = | .265 |
| 56 | = | .328 |
| 38 | = | .390 |

WIRE SIZE: 12-10 AWG
4.0-6.0 MM²

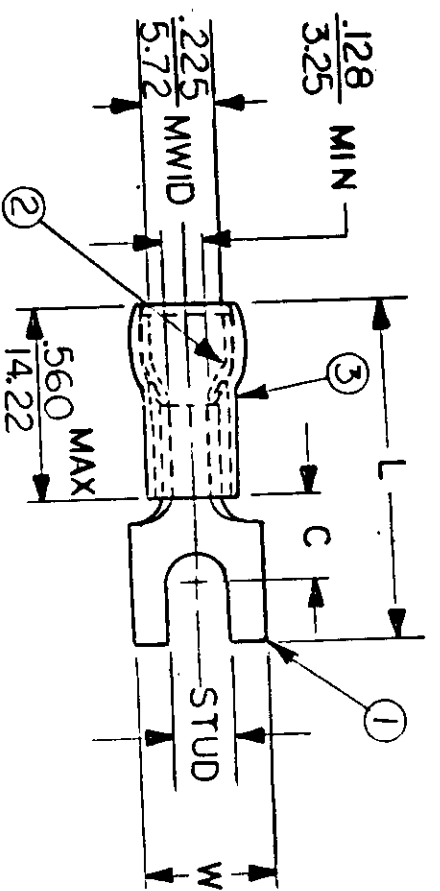

ALL DIMENSIONS = $\frac{\text{INCHES}}{\text{MM}}$
(MWID) = DENOTES MAXIMUM WIRE INSULATION DIAMETER

PART NUMBER	"W" ±.010	"C" MIN.	"L" MAX.	AVAILABLE STUD SIZES			
C-8102-	$\frac{.415}{10.41}$	$\frac{.305}{7.75}$	$\frac{1.090}{27.69}$	08			
C-8105-	$\frac{.320}{8.13}$	$\frac{.305}{7.75}$	$\frac{1.090}{27.69}$	06			
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED				REFERENCE	SCALE: NTS	DATE	TITLE: SPADED TONGUE TERMINAL AVIKRIMP 800-SERIES
FRAC.	DEC.	ANG.					
±	±	±					
				DWG. NO. A CUSTOMER DWG			

ETC INCORPORATED
molex

CUSTOMER
DWG

