


REV.	DATE	ECR NO.	DESCRIPTION
NC	05/18/11	XXXXXX	INITIAL RELEASE
A	06/08/11	2179	THE BODY'S KNURL WAS CHANGED

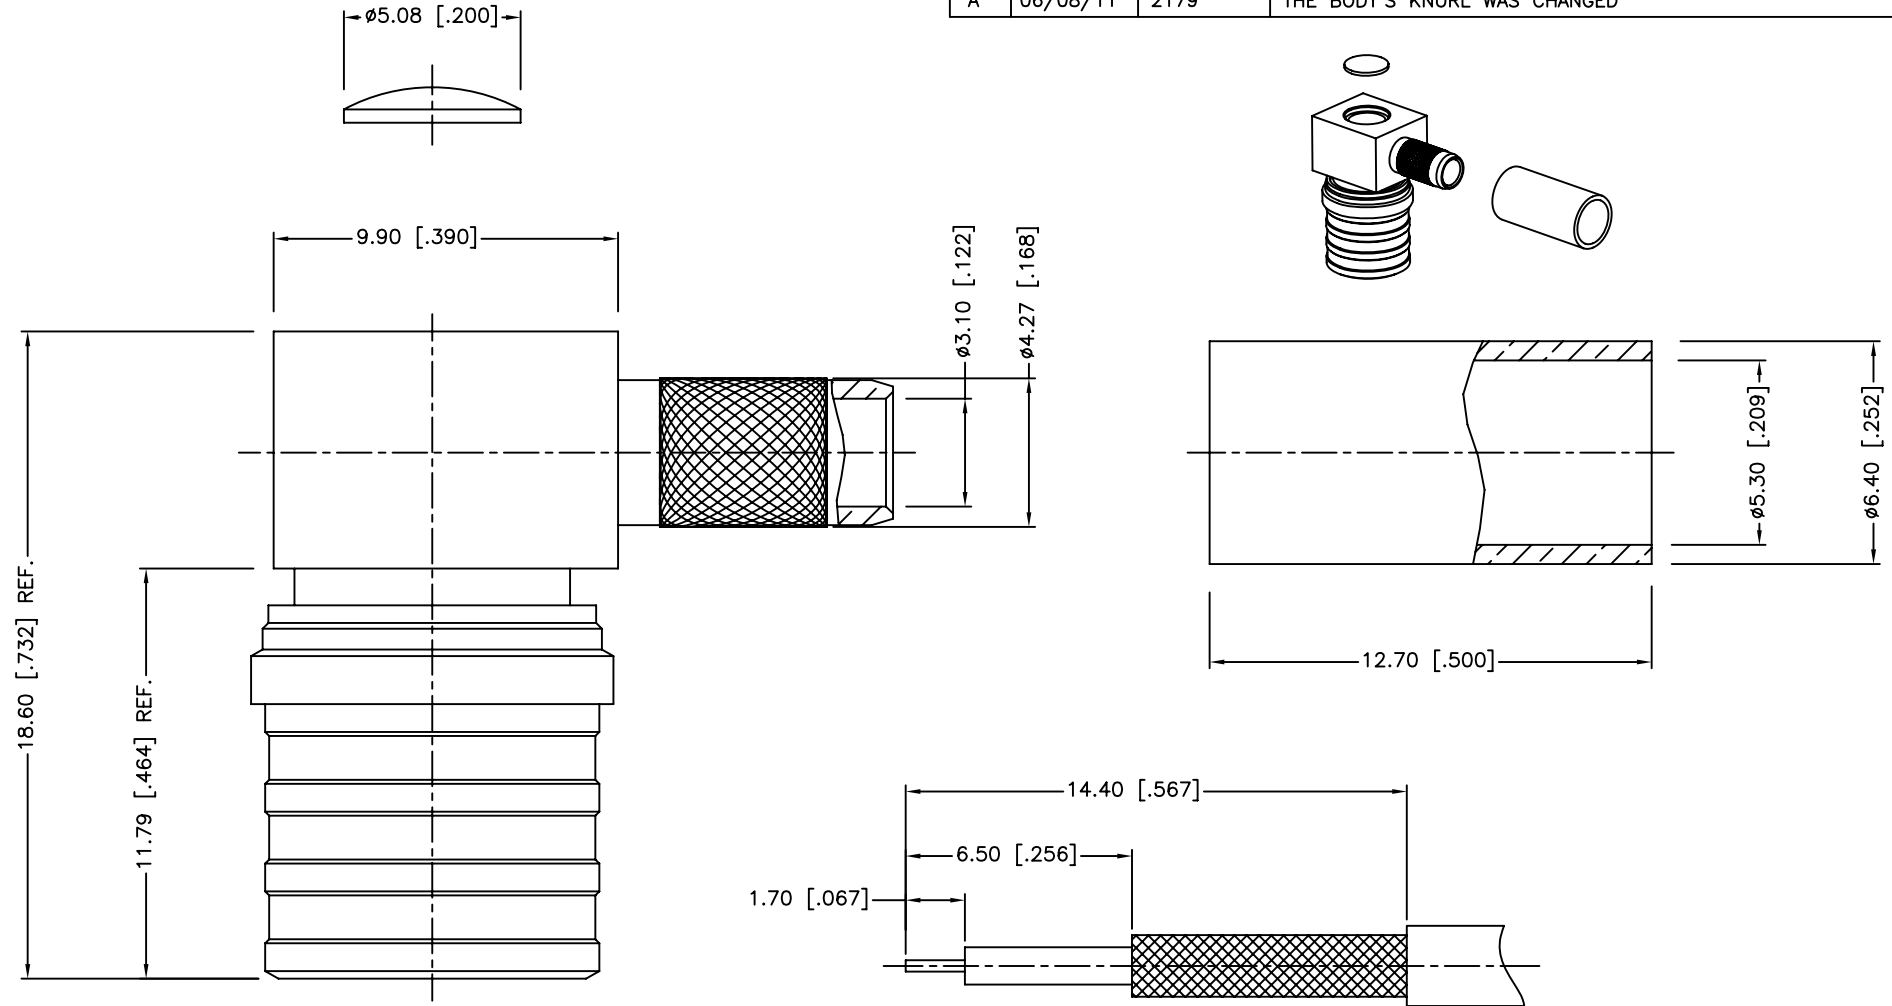

RECOMMENDED CABLE STRIPPING DIM'S

1. CRIMPED FERRULE
HEX. CRIMP SIZE .216"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE		Amphenol Connex				
7	FERRULE	BRASS	NEXCOTE	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	DRAWN	S.LI	05/18/11							
6	CAP	BRASS	NEXCOTE	1		CHECKED									
5	CONTACT PIN	BRASS	GOLD	1		ISSUED									
4	SLEEVE	BRASS	NEXCOTE	1		SHEET	1 OF 1								
3	OUTER CONTACT	PHOS. BRONZE	NEXCOTE	1		DO NOT SCALE DRAWING	CAD FILE		C:/CONNEX/134102.DWG		PART DESCRIPTION QMA R/A PLUG FOR RG–58 TYPE CABLE				
2	INSULATOR	PTFE	NATURAL	1	PART NO. 134102										
1	BODY	BRASS	NEXCOTE	1	DWG. NO. 134102.DWG				REV. A	SIZE A	SCALE NA				
DESCRIPTION		MATERIAL	FINISH	QTY											

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[134102](#)