
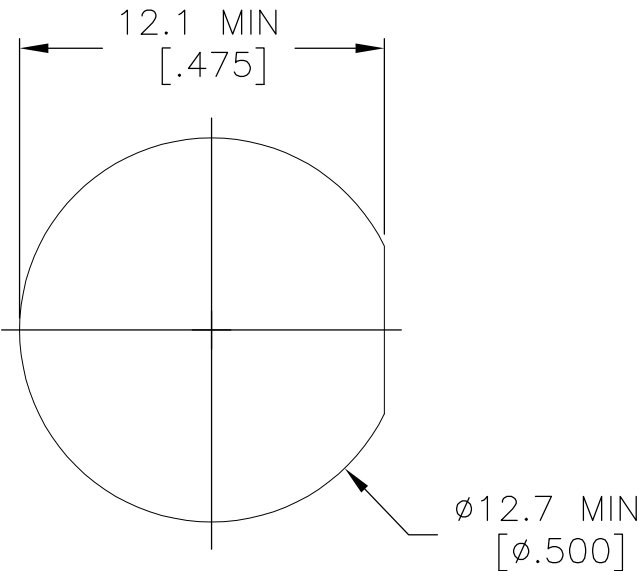


LOC —	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			A1	REVISED PER ECO-10-006951	02APR10	HMR	WK

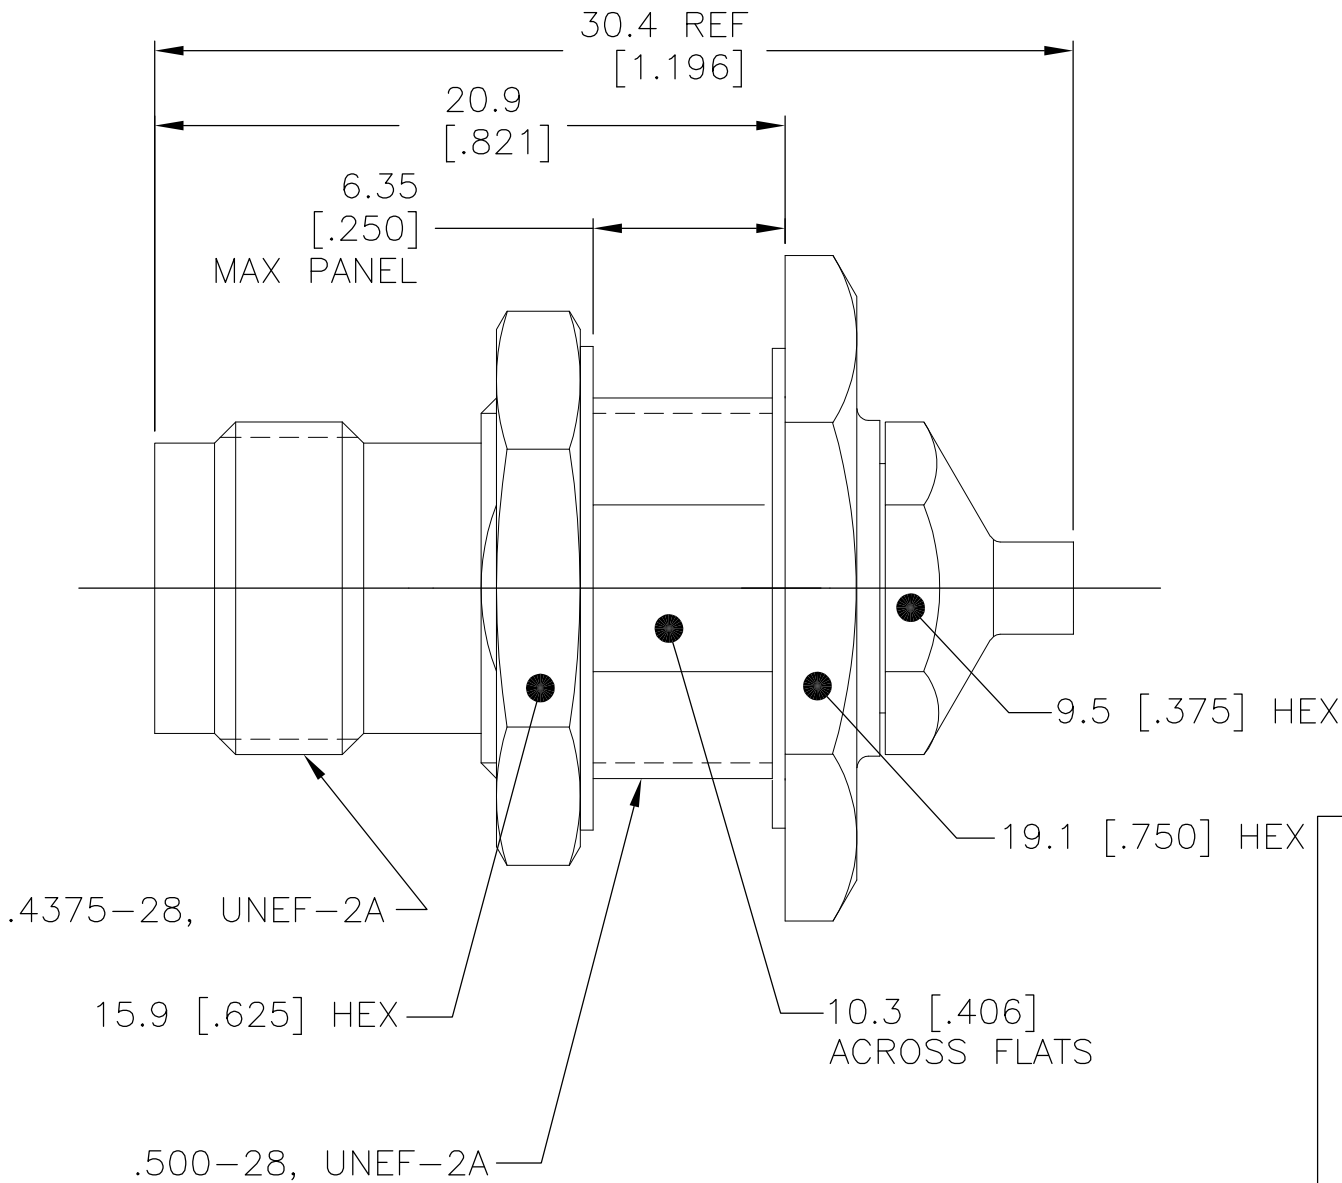

RECOMMENDED MOUNTING HOLE

.4375-28, UNEF-2A
15.9 [.625] HEX
.500-28, UNEF-2A

REAR HOUSING MOUNTING NUT LOCKWASHER	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582	PASSIVATE PER QQ-P-35
FRONT HOUSING	BRASS PER ASTM-B-16	GOLD PLATE PER ASTM-B488
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1710	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197	GOLD PLATE PER ASTM-B488 N/A
GASKET	SILICONE RUBBER PER ZZ-R-765	
COMPONENT	MATERIAL	FINISH

1. SEE INSTRUCTION SHEET 408-8205.

DESIGNED FOR USE WITH .141" S.R.	
CABLE ENTRY DIAMETER MINIMUM	
HOUSING	3.61 [.142]
CONTACT	1.07 [.042]

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.M.K.	3/5/70	Tyco Electronics Corporation Harrisburg, PA 17105-3608		
		CHK B.W.C.	6/29/70			
		APVD T.A.R.	6/29/70	NAME		
		PRODUCT SPEC	—	TNC STRAIGHT BULKHEAD CABLE JACK DIRECT SOLDER VERSION		
		APPLICATION SPEC	—	SIZE	CAGE CODE	DRAWING NO
		WEIGHT	—	A3	00779	C-1057676
		CUSTOMER DRAWING	SCALE	4:1	SHEET	1 OF 1
					REV	A1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3104-7941-00](#)