


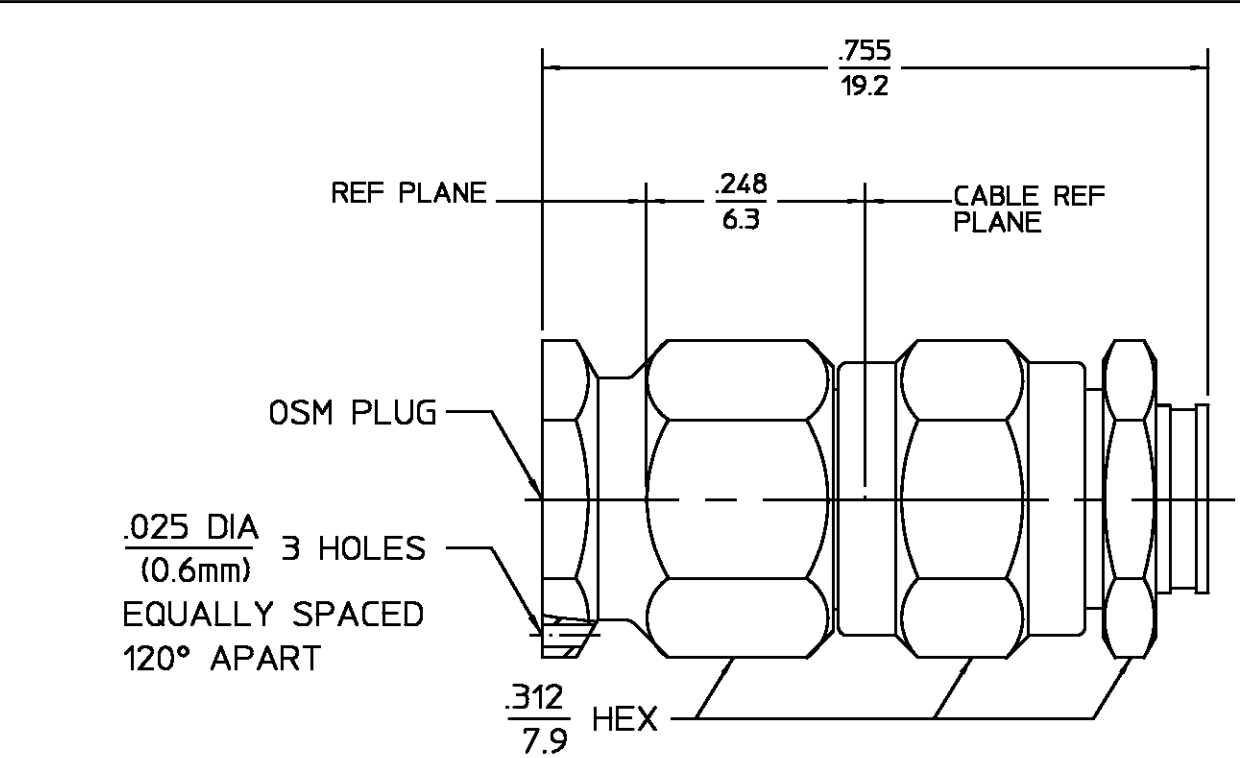

DESIGNED FOR USE WITH	
.085 SEMI-RIGID CABLE	
CABLE ENTRY DIAMETER	
MINIMUM	
CONTACT	.025
SLEEVE	.087

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
010	RELEASED	7/1/94	<i>RA</i>

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Nominal Impedance (Ohms) <u>50</u>	Interface Dimensions MIL-STD-348A, Fig. <u>310.1</u>	Temperature Rating <u>-65°C to +165°C</u>
Frequency Range (GHz) DC to <u>18.0</u>	Recommended Mating	Vibration MIL-STD-202, Method 204, Condition D.
Volt Rating (VRMS MAX) <u>Sea Level 335</u>	Torque <u>7-10 in-lbs</u>	Shock MIL-STD-202, Method 213, Condition I.
VSWR <u>1.07 + .01 f(GHz)</u>	Mating Characteristics:	Thermal Shock MIL-STD-202, Method 107, Condition B,
Insertion Loss (dB MAX) <u>.03 √f(GHz)</u>	Insertion (MAX Lbs) <u>N/A</u>	Except High Temp <u>+115°C</u>
RF Leakage (dB MIN) <u>-[90-f(GHz)]</u>	Withdrawal (MIN Oz) <u>N/A</u>	Moisture Resistance MIL-STD-202, Method 106
Corona, 70,000 Ft (VRMS MIN) <u>250</u>	Force to Engage and Disengage (In-Lbs MAX) <u>2.0</u>	Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray
Dielectric Withstanding Voltage (VRMS MIN) <u>Sea Level 1000</u>	Center Contact Captivation	
Contact Resistance (Milliohms MAX)	Axial (Lbs) <u>6.0</u>	
Center Contact <u>3.0</u>	Radial (In-Oz) <u>N/A</u>	
Outer Contact <u>2.0</u>	Cable Retention	
Cable to Housing <u>0.5</u>	Axial Force (Lbs MIN) <u>30.0</u>	
RF High Potential <u>Sea Level</u>	Torque (In-Oz) <u>16.0</u>	
(VRMS MIN <u>5 MHz</u>) <u>670</u>	Weight (Grams) <u>TBD</u>	
IR.(Megohms MIN) <u>5,000</u>		

HOUSING COUPLING NUT CLAMP NUT	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	PASSIVATE PER ASTM-A-380
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204
SLEEVE	BRASS PER ASTM-B-16, HALF HARD	GOLD PLATE PER MIL-G-45204
RETAINING RING	BERYLLIUM COPPER PER ASTM B 194, ALLOY C17200, CONDITION H	N/A
GASKET	SILICONE RUBBER PER ZZ-R-765	N/A
COMPONENT	MATERIAL	FINISH
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON FRAC. DEC. ANGLES ± 1/64 ±.005 ± 1°		
DRAWN BY <i>RA</i> DATE 7/1/94 CHECKED BY <i>RA</i> APPD BY <i>RA</i> 7/1/94		
These drawings and specifications are the property of Omni Spectra Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.		
USE ASS'Y PROCEDURE 408-04918 NO. AP20-545		
AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599		
TITLE OSM STRAIGHT CABLE PLUG-SOLDER CLAMP ATTACHMENT M39012/79-3007 CAT E		
SIZE B	CODE IDENT NO. 26805	2001-8007-92
SCALE 5 : 1	REV 010	
SHEET 1 OF 1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2001-8007-92](#)