

FCF8-20-01-L-03.00-S

FCF8-10-01-L-03.00-S



FCS8-20-01-L-S-A-TR

FCS8-10-01-L-S-A-TR

FCF8, FCS8 SERIES

(0.80 mm) .0315"

HIGH-SPEED COST EFFECTIVE COAX CABLE

SPECIFICATIONS

For complete specifications see www.samtec.com?FCF8

- Cable:** 38 AWG coax
- Overmold:** Nylon
- Terminal Material:** Phosphor Bronze
- Contact Plating:** Au or Sn over 50 μ" (1.27 μm) Ni
- Operating Temp Range:** -25 °C to +105 °C
- Current Rating:** 1.8 A per pin (1 pin powered)
- RoHS Compliant:** Yes

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality




Notes: Design your High-Speed Cable using Samtec's Cable Builder: www.samtec.com/cablebuilder

Cable lengths longer than 40.00" (1 meter) are not supported with S.I. test data.

Some lengths, styles and options are non-standard, non-returnable.

FCF8	NO. OF POSITIONS	01	PLATING OPTION	CABLE LENGTH	S
Mates with: FCS8		-10, -20, -30	-L = 10 μ" (0.25 μm) Gold on contact, Matte Tin on tail	"XX.XX" = Length in Inches 03.00" (76.2 mm) minimum	

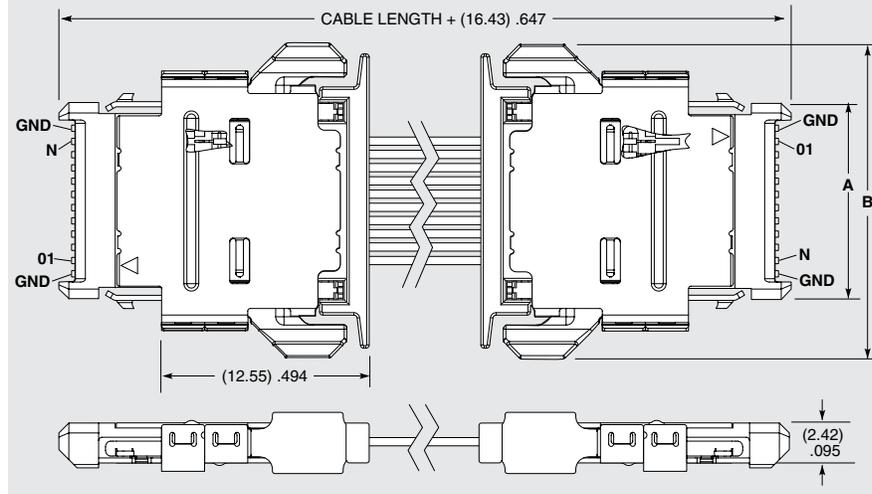

NO. OF POSITIONS	A	B
-10	(11.85) .467	(19.00) .748
-20	(19.85) .781	(27.00) 1.063
-30	(27.85) 1.096	(35.00) 1.378

ALSO AVAILABLE (MOV Required)

- Other sizes and lengths

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?FCS8

- Insulator Material:** Black LCP
- Contact Material:** BeCu
- Contact Plating:** Au or Sn over 50 μ" (1.27 μm) Ni
- Shield:** Nickel Plated Phosphor Bronze
- Operating Temp Range:** -55 °C to +125 °C
- Current Rating:** 1.8 A per pin (1 pin powered)
- RoHS Compliant:** Yes

PROCESSING


Lead-Free Solderable: Yes
SMT Lead Coplanarity: (0.15 mm) .006" max*
 *(.004" stencil solution may be available; contact IPG@samtec.com)

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality



FCS8	NO. OF POSITIONS	01	PLATING OPTION	S	A	"X"R
Mates with: FCF8		-10, -20, -30	-L = 10 μ" (0.25 μm) Gold on contact, Matte Tin on tail			-TR = Tape & Reel -FR = Full Reel Tape & Reel (must order max. quantity per reel; contact Samtec for quantity breaks)

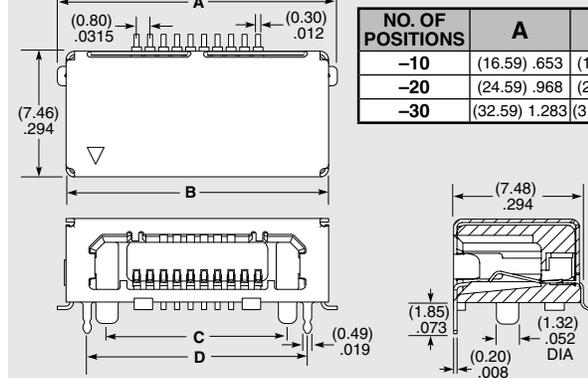

NO. OF POSITIONS	A	B	C	D
-10	(16.59) .653	(15.56) .613	(10.70) .421	(13.06) .514
-20	(24.59) .968	(23.56) .928	(18.70) .736	(21.06) .829
-30	(32.59) 1.283	(31.56) 1.243	(26.70) 1.051	(29.06) 1.144



- Weld tabs
- Positive latching
- Shielded for EMI protection

Note: Some lengths, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Samtec:

[FCF8-20-01-L-20.00-S](#) [FCF8-20-01-L-03.50-S](#) [FCF8-20-01-L-27.00-S-1](#) [FCF8-30-01-L-58.00-S](#) [FCF8-20-01-L-16.00-S-1](#) [FCF8-20-01-L-29.53-S-1](#) [FCF8-30-01-L-03.00-S-1](#) [FCF8-30-01-L-78.75-S-1](#) [FCF8-20-01-L-06.50-S](#) [FCF8-30-01-L-40.00-S-1](#) [FCF8-20-01-L-19.68-S-1](#) [FCF8-20-01-L-30.00-S-1](#) [FCF8-20-01-L-15.00-S-1](#) [FCF8-30-01-L-39.37-S-1](#) [FCF8-20-01-L-59.00-S](#) [FCF8-10-01-L-24.00-S](#) [FCF8-10-01-L-30.00-S](#) [FCF8-30-01-L-12.00-S](#) [FCF8-10-01-L-31.50-S](#) [FCF8-20-01-L-118.1-S](#) [FCF8-20-01-L-197.0-S](#) [FCF8-10-01-L-27.60-S](#) [FCF8-20-01-L-16.00-S](#) [FCF8-20-01-L-19.68-S](#) [FCF8-30-01-L-05.91-S](#) [FCF8-10-01-L-11.00-S](#) [FCF8-20-01-L-04.00-S](#) [FCF8-20-01-L-10.00-S](#) [FCF8-20-01-L-39.37-S](#) [FCF8-30-01-L-16.00-S](#) [FCF8-30-01-L-39.37-S](#) [FCF8-20-01-L-07.00-S](#) [FCF8-20-01-L-08.00-S](#) [FCF8-20-01-L-24.00-S-1](#) [FCF8-20-01-L-38.81-S](#) [FCF8-30-01-L-80.00-S](#) [FCF8-20-01-L-03.00-S](#) [FCF8-20-01-L-05.00-S](#) [FCF8-20-01-L-09.00-S](#) [FCF8-20-01-L-11.80-S](#) [FCF8-20-01-L-19.69-S](#) [FCF8-20-01-L-47.24-S](#) [FCF8-30-01-L-14.00-S](#) [FCF8-30-01-L-35.00-S](#) [FCF8-20-01-L-72.00-S-1](#) [FCF8-10-01-L-03.00-S](#) [FCF8-20-01-L-36.00-S](#) [FCF8-30-01-L-84.00-S](#) [FCF8-10-01-L-03.94-S](#) [FCF8-10-01-L-04.00-S](#) [FCF8-10-01-L-05.50-S](#) [FCF8-20-01-L-06.00-S](#) [FCF8-20-01-L-08.00-S-1](#) [FCF8-20-01-L-29.53-S](#) [FCF8-30-01-L-40.00-S](#) [FCF8-10-01-L-05.90-S](#) [FCF8-10-01-L-14.40-S](#) [FCF8-20-01-L-23.20-S](#) [FCF8-20-01-L-60.00-S](#) [FCF8-10-01-L-19.70-S](#) [FCF8-20-01-L-12.00-S](#) [FCF8-20-01-L-16.70-S](#) [FCF8-20-01-L-19.00-S](#) [FCF8-30-01-L-03.00-S](#) [FCF8-30-01-L-06.00-S](#) [FCF8-10-01-L-09.00-S](#) [FCF8-10-01-L-14.00-S](#) [FCF8-20-01-L-09.84-S](#) [FCF8-20-01-L-40.00-S](#) [FCF8-30-01-L-10.00-S](#) [FCF8-10-01-L-06.00-S](#) [FCF8-20-01-L-11.81-S](#) [FCF8-20-01-L-24.00-S](#) [FCF8-20-01-L-78.74-S](#) [FCF8-30-01-L-07.87-S](#) [FCF8-30-01-L-09.00-S](#) [FCF8-10-01-L-10.00-S](#) [FCF8-10-01-L-36.00-S](#) [FCF8-30-01-L-07.00-S](#) [FCF8-10-01-L-40.00-S](#) [FCF8-10-01-L-10.70-S](#) [FCF8-10-01-L-19.68-S](#) [FCF8-30-01-L-25.00-S](#) [FCF8-30-01-L-19.68-S](#) [FCF8-30-01-L-24.00-S](#) [FCF8-10-01-L-12.00-S](#) [FCF8-10-01-L-16.00-S](#) [FCF8-20-01-L-15.00-S](#) [FCF8-20-01-L-18.00-S](#) [FCF8-30-01-L-04.00-S](#) [FCF8-30-01-L-05.00-S](#) [FCF8-30-01-L-36.00-S](#) [FCF8-10-01-L-07.00-S](#) [FCF8-20-01-L-19.70-S](#) [FCF8-20-01-L-27.60-S](#) [FCF8-20-01-L-59.05-S](#) [FCF8-30-01-L-50.00-S](#) [FCF8-10-01-L-03.00-S-1](#) [FCF8-10-01-L-12.40-S](#) [FCF8-20-01-L-12.00-S-1](#)