

Combination type 1/2 protective device - FLT-PLUS CTRL-2.5 - 2800121

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



The figure shows version FLT-PLUS CTRL-0,9

Type 1 / Class I (lightning current arrester) with arc chopping spark gap and ignition electronics, quenching plates for high mains follow-through current quenching capacity, 1-channel. Protection level: 2.5 kV. Housing width: 35 mm (2 Div.)

Your advantages

- ✓ Good follow current quenching capacity with higher rated voltage
- ✓ High discharge capacity
- ✓ Direct parallel connection with type 2 arresters supported
- ✓ 1-channel
- ✓ Triggered



Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 480062
GTIN	4046356480062

Technical data

Dimensions

Height	150 mm
Width	35.5 mm
Depth	80.5 mm
Horizontal pitch	2 Div.

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 85 °C
Permissible humidity (operation)	≤ 95 %

General

Combination type 1/2 protective device - FLT-PLUS CTRL-2.5 - 2800121

Technical data

General

IEC power supply system	TT
	TN-C
	TN-S
	IT
Housing material	PA-GF
Flammability rating according to UL 94	V0
Color	black
Standards for clearances and creepage distances	EN 60664-1
	EN 61643-11
Mounting type	DIN rail: 35 mm
Type	DIN rail module, one-piece
Number of positions	1
Surge protection fault message	none
Direction of action	1L-N/PE

Protective circuit

IEC test classification	I
	T1
EN type	T1
Maximum continuous operating voltage U_C	440 V AC
Maximum continuous operating voltage U_C (L-N)	440 V AC
Maximum continuous operating voltage U_C (L-PEN)	440 V AC
U_T (TOV-proof)	440 V AC (5 sec.)
U_T (TOV-safe)	1640 V AC (200 ms)
Nominal frequency f_N	50 Hz
	60 Hz
Residual current I_{PE}	≤ 0.1 mA
Standby power consumption P_C	≤ 44 mVA
Max. discharge current I_{max} (8/20) μ s	50 kA
Impulse discharge current (10/350) μ s, charge	25 As
Impulse discharge current (10/350) μ s, specific energy	625 kJ/ Ω
Impulse discharge current (10/350) μ s, peak value I_{imp}	50 kA
Nominal discharge current I_n (8/20) μ s	50 kA
Nominal discharge current I_n (8/20) μ s (L-N)	50 kA
Nominal discharge current I_n (8/20) μ s (L-PEN)	50 kA
Front of wave sparkover voltage at 6 kV (1.2/50) μ s	≤ 2.5 kV
Voltage protection level U_p	≤ 2.5 kV
Voltage protection level U_p (L-N)	≤ 2.5 kV
Voltage protection level U_p (L-PEN)	≤ 2.5 kV
Response time t_A	≤ 100 ns

Combination type 1/2 protective device - FLT-PLUS CTRL-2.5 - 2800121

Technical data

Protective circuit

Response time t_A (L-N)	≤ 100 ns
Response time t_A (L-PE)	≤ 100 ns
Max. backup fuse with branch wiring	500 A (NH-gL)
Short-circuit withstand capability I_P with max. backup fuse (r.m.s.)	25 kA (440 V AC)
	50 kA (350 V AC)
Follow current interrupt rating I_{fi}	25 kA (440 V AC)
	50 kA (350 V AC)

Connection, protective circuit

Connection method	Screw connection
Connection method IN	Biconnect screw terminal block
Connection method OUT	Biconnect screw terminal block
Connection technology	Biconnect terminal block
Screw thread	M6
Tightening torque	8 Nm
Stripping length	19 mm
Conductor cross section flexible min.	16 mm ²
Conductor cross section flexible max.	35 mm ²
Conductor cross section solid min.	10 mm ²
Conductor cross section solid max.	50 mm ²
Conductor cross section AWG min.	6
Conductor cross section AWG max.	1

Standards and Regulations

Standards/regulations	IEC 61643-1 2005
	DIN EN 61643-11 2002
	DIN EN 61643-11/A11 2007


Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values


Drawings

Combination type 1/2 protective device - FLT-PLUS CTRL-2.5 - 2800121

Dimensional drawing

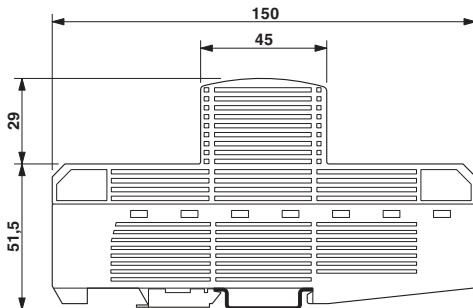

Circuit diagram

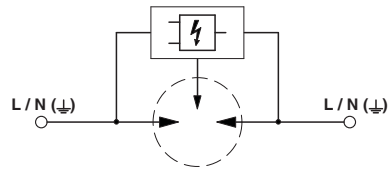

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[2800121](#)