


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	N	REVISED PER ECR-17-006536	14SEP2017	RS	SZ

D

C

B

A

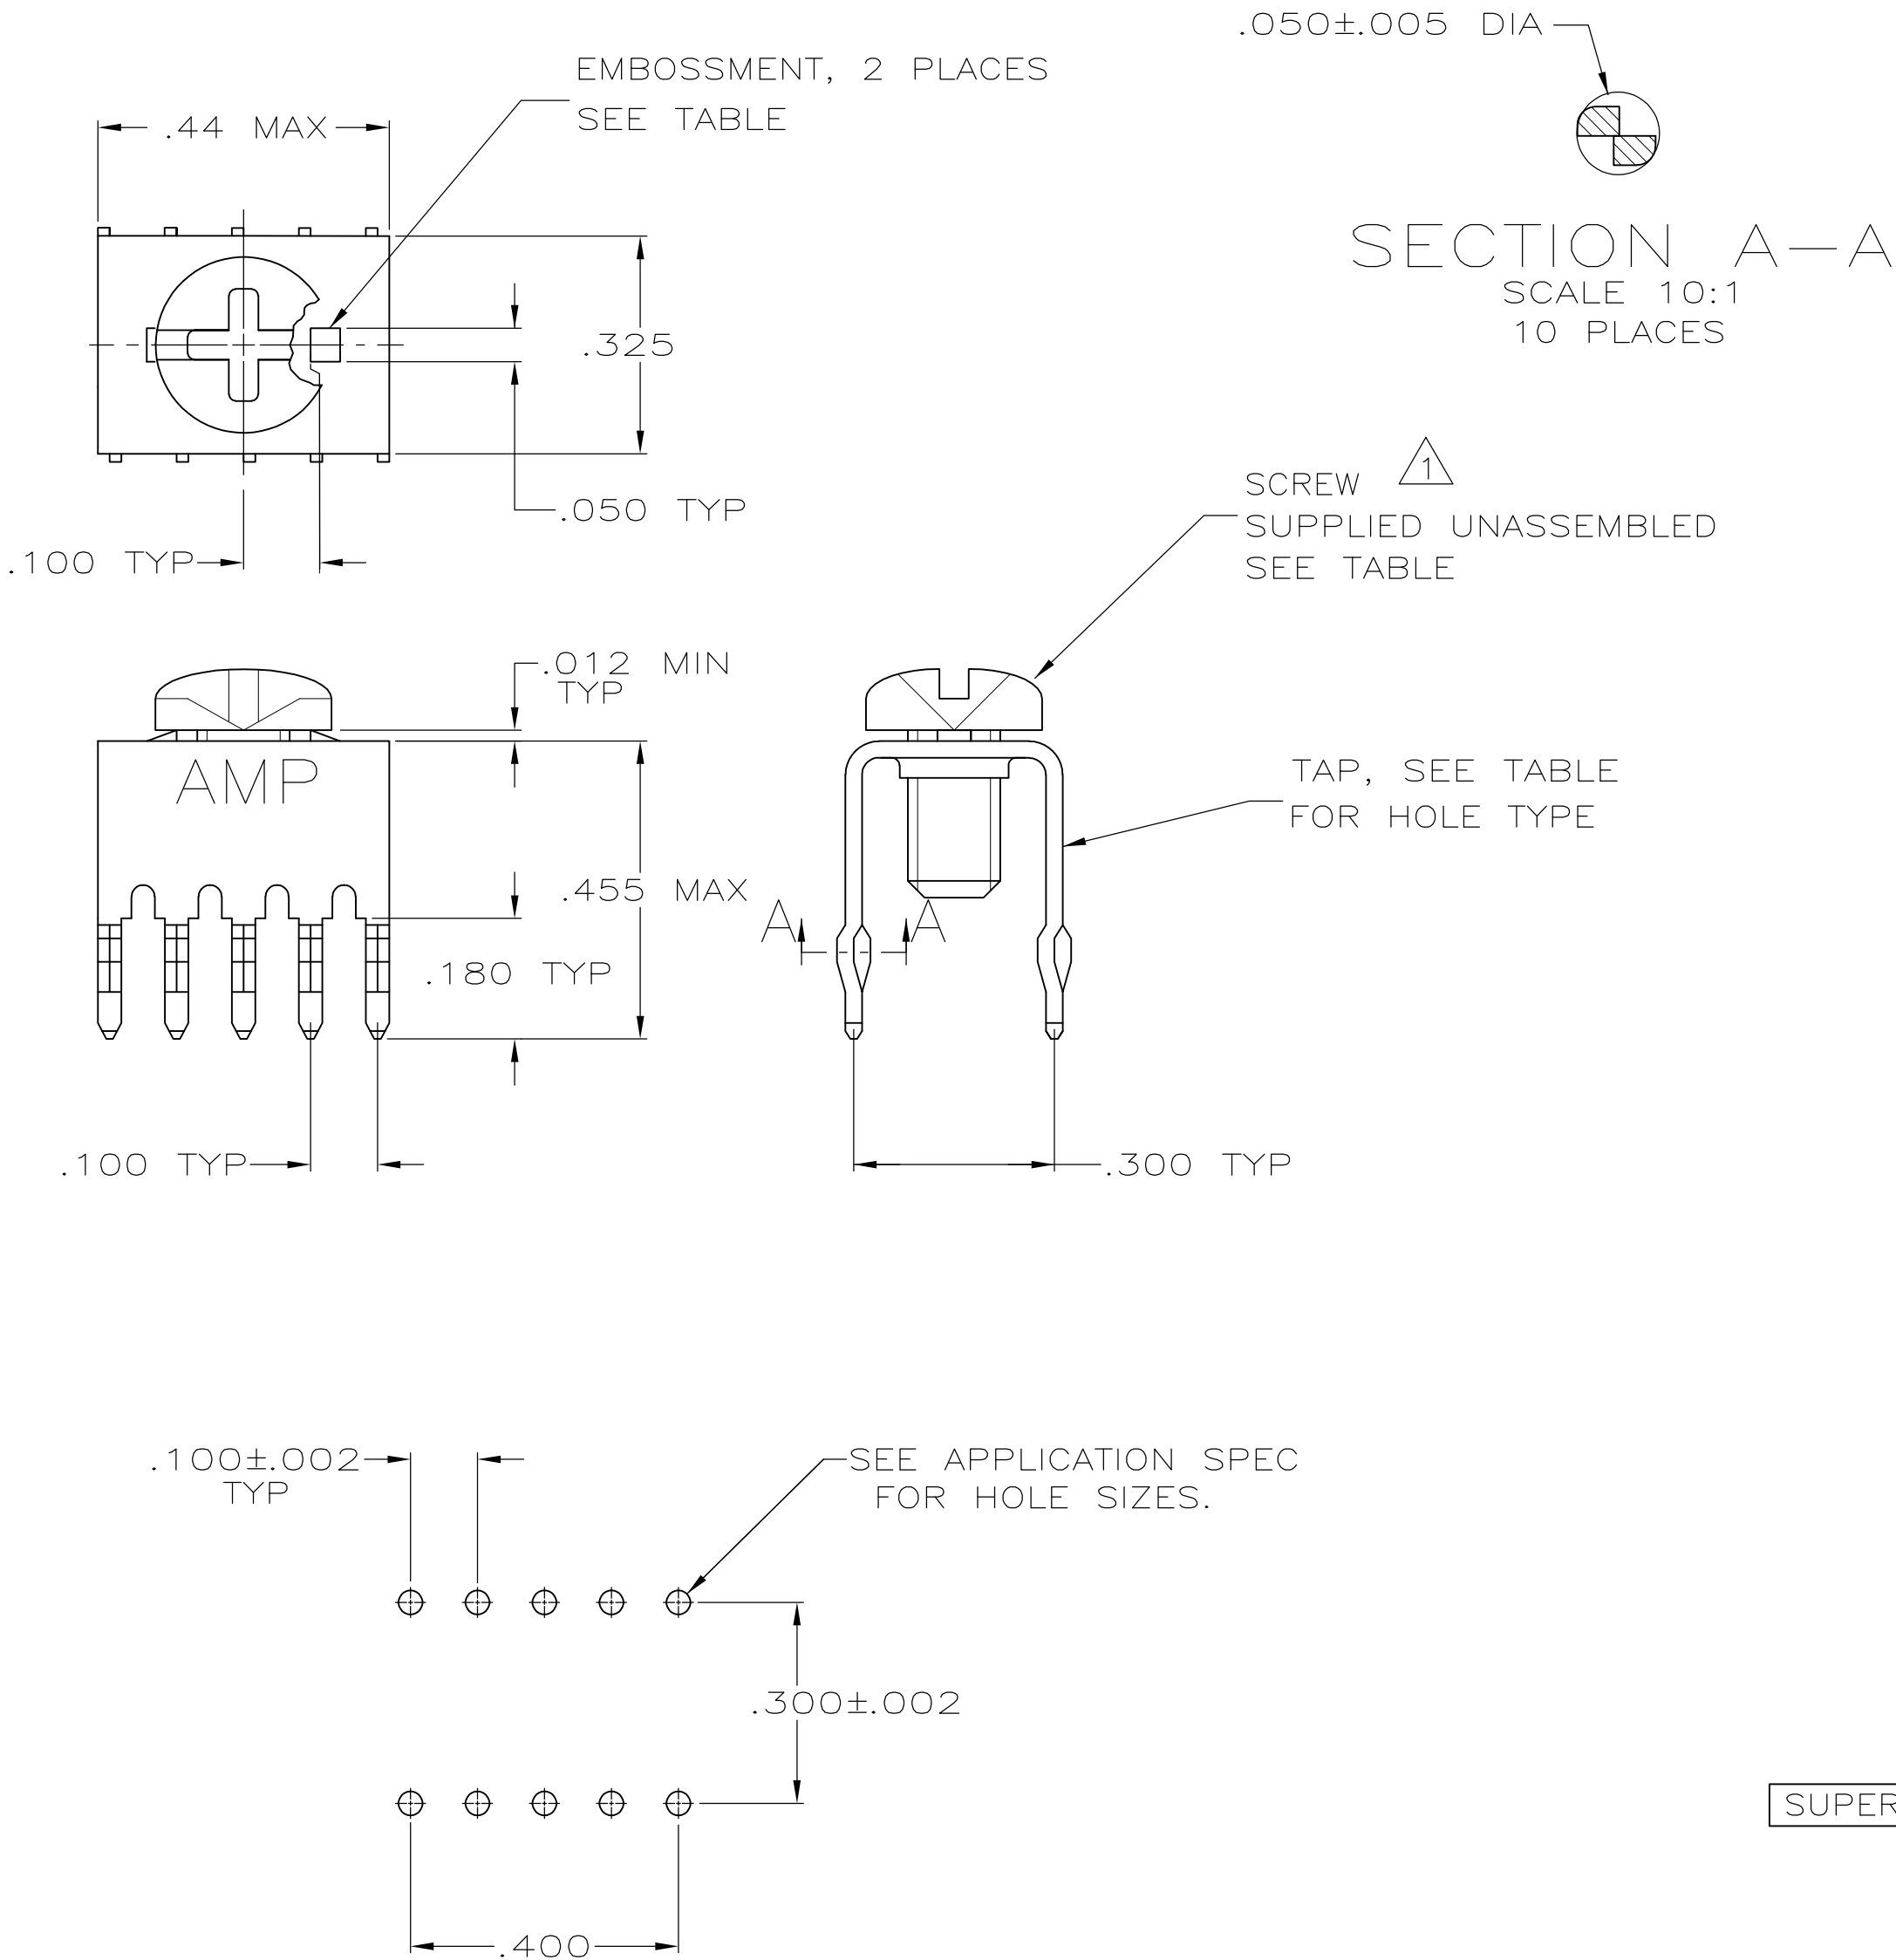

- ¹ TO PREVENT THREAD STRIPPING, SCREW TORQUE SHOULD NOT EXCEED 9 IN LBS.
- ² TAP HOLE IS 6-32UNC-2B, TWO MIN THREADS.
- ³ TAP HOLE IS M4 X 0.7, TWO MIN THREADS.
- ⁴ TAP: .000150 TIN-LEAD OVER .000050 NICKEL.
- ⁵ TAP: .000150 TIN OVER .000050 NICKEL.

OBSOLETE		²	993879-1	YES	9-55558-1
OBSOLETE	⁵	²	NO	YES	9-55558-0
OBSOLETE	⁴	³	NO	YES	1-55558-1
SUPERSEDED BY -4		²	993879-1	NO	55558-8
OBSOLETE		²	NO	NO	55558-7
OBSOLETE	⁴	²	993879-1	YES	55558-4
OBSOLETE		²	NO	YES	55558-3
		FINISH	HOLE TYPE	SCREW	EMBOSSMENT
				PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. McCLINTON 1-11-88		 TE Connectivity			
		CHK R. STONE 1-11-88					
DIMENSIONS: INCHES		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		APVD M. GALLOWAY 1-11-88		NAME	
		0 PLC ± -		PRODUCT SPEC		TAP, POWER DISTRIBUTION -	
		1 PLC ± -		-			
		2 PLC ± -					
		3 PLC ± .008		APPLICATION SPEC			
		4 PLC ± -		114-11000		SIZE	
		ANGLES ± ±		WEIGHT 0.000000		CAGE CODE	
MATERIAL		FINISH		A2		DRAWING NO	
COPPER ALLOY 725.				C=55558		RESTRICTED TO	
				CUSTOMER DRAWING		-	
				SCALE 4:1		SHEET 1 of 1	
						REV N	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[55558-7](#)