THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION - .- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST
AD	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REVISED PER ECO-14-000254	15APR2014	NK	MM

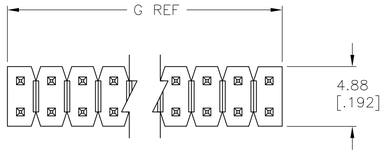

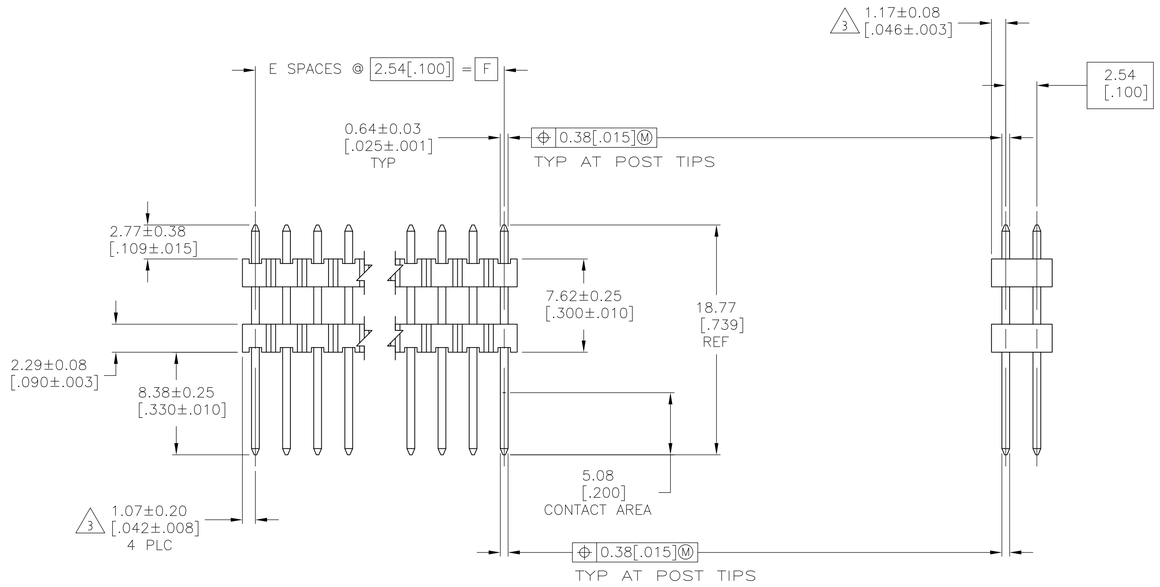

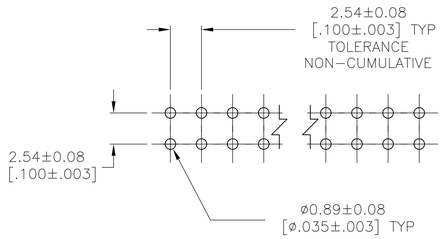

RECOMMENDED HOLE LAYOUT

1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS

2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD

3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING

4 HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
CONTACT: COPPER ALLOY

5 FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA,
0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD ON SOLDER TAIL,
0.00127 [.000050] NICKEL ENTIRE POST.

6 FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA,
0.00254-0.00508 [.000100-.000200] MATTE TIN ON SOLDER TAIL,
0.00127 [.000050] NICKEL ENTIRE POST.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± 0.5[.02]
2 PLC ± 0.13[.005]
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL 4

FINISH SEE TABLE

DWN	R BROWN 19OCT2006
CHK	J GESFORD 19OCT2006
APVD	J GESFORD 19OCT2006
PRODUCT SPEC	-
APPLICATION SPEC	-
WEIGHT	-

TE Connectivity

NAME: HEADER ASSEMBLY, MOD II, STACKING, DOUBLE ROW, .025 SQ.POST, UNSHROUDED

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-146490	-

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 2 | REV B

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -;- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST
AD	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	SEE SHEET 1	–	—	—

	G	F	E	NO. OF POSITIONS	PART NUMBER
△6	101.19 [3.984]	99.06 [3.900]	39	80	9–146490–0
△6	98.65 [3.884]	96.52 [3.800]	38	78	8–146490–9
△6	96.11 [3.784]	93.98 [3.700]	37	76	8–146490–8
△6	93.57 [3.684]	91.44 [3.600]	36	74	8–146490–7
△6	91.03 [3.584]	88.90 [3.500]	35	72	8–146490–6
△6	88.49 [3.484]	86.36 [3.400]	34	70	8–146490–5
△6	85.95 [3.384]	83.82 [3.300]	33	68	8–146490–4
△6	83.41 [3.284]	81.28 [3.200]	32	66	8–146490–3
△6	80.87 [3.184]	78.74 [3.100]	31	64	8–146490–2
△6	78.33 [3.084]	76.20 [3.000]	30	62	8–146490–1
△6	75.79 [2.984]	73.66 [2.900]	29	60	8–146490–0
△6	73.25 [2.884]	71.12 [2.800]	28	58	7–146490–9
△6	70.71 [2.784]	68.58 [2.700]	27	56	7–146490–8
△6	68.17 [2.684]	66.04 [2.600]	26	54	7–146490–7
△6	65.63 [2.584]	63.50 [2.500]	25	52	7–146490–6
△6	63.09 [2.484]	60.96 [2.400]	24	50	7–146490–5
△6	60.55 [2.384]	58.42 [2.300]	23	48	7–146490–4
△6	58.01 [2.284]	55.88 [2.200]	22	46	7–146490–3
△6	55.47 [2.184]	53.34 [2.100]	21	44	7–146490–2
△6	52.93 [2.084]	50.80 [2.000]	20	42	7–146490–1
△6	50.39 [1.984]	48.26 [1.900]	19	40	7–146490–0
△6	47.85 [1.884]	45.72 [1.800]	18	38	6–146490–9
△6	45.31 [1.784]	43.18 [1.700]	17	36	6–146490–8
△6	42.77 [1.684]	40.64 [1.600]	16	34	6–146490–7
△6	40.23 [1.584]	38.10 [1.500]	15	32	6–146490–6
△6	37.69 [1.484]	35.56 [1.400]	14	30	6–146490–5
△6	35.15 [1.384]	33.02 [1.300]	13	28	6–146490–4
△6	32.61 [1.284]	30.48 [1.200]	12	26	6–146490–3
△6	30.07 [1.184]	27.94 [1.100]	11	24	6–146490–2
△6	27.53 [1.084]	25.40 [1.000]	10	22	6–146490–1
△6	24.99 [.984]	22.86 [.900]	9	20	6–146490–0
△6	22.45 [.884]	20.32 [.800]	8	18	5–146490–9
△6	19.91 [.784]	17.78 [.700]	7	16	5–146490–8
△6	17.37 [.684]	15.24 [.600]	6	14	5–146490–7
△6	14.83 [.584]	12.70 [.500]	5	12	5–146490–6
△6	12.29 [.484]	10.16 [.400]	4	10	5–146490–5
△6	9.75 [.384]	7.62 [.300]	3	8	5–146490–4
△6	7.21 [.284]	5.08 [.200]	2	6	5–146490–3
△6	4.67 [.184]	2.54 [.100]	1	4	5–146490–2
△6	2.13 [.084]	– –	–	2	5–146490–1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

	G	F	E	NO. OF POSITIONS	PART NUMBER
	△5 101.19 [3.984]	99.06 [3.900]	39	80	4–146490–0
OBSOLETE	△5 98.65 [3.884]	96.52 [3.800]	38	78	3–146490–9
	△5 96.11 [3.784]	93.98 [3.700]	37	76	3–146490–8
	△5 93.57 [3.684]	91.44 [3.600]	36	74	3–146490–7
	△5 91.03 [3.584]	88.90 [3.500]	35	72	3–146490–6
	△5 88.49 [3.484]	86.36 [3.400]	34	70	3–146490–5
	△5 85.95 [3.384]	83.82 [3.300]	33	68	3–146490–4
	△5 83.41 [3.284]	81.28 [3.200]	32	66	3–146490–3
	△5 80.87 [3.184]	78.74 [3.100]	31	64	3–146490–2
	△5 78.33 [3.084]	76.20 [3.000]	30	62	3–146490–1
OBSOLETE	△5 75.79 [2.984]	73.66 [2.900]	29	60	3–146490–0
	△5 73.25 [2.884]	71.12 [2.800]	28	58	2–146490–9
	△5 70.71 [2.784]	68.58 [2.700]	27	56	2–146490–8
	△5 68.17 [2.684]	66.04 [2.600]	26	54	2–146490–7
	△5 65.63 [2.584]	63.50 [2.500]	25	52	2–146490–6
	△5 63.09 [2.484]	60.96 [2.400]	24	50	2–146490–5
	△5 60.55 [2.384]	58.42 [2.300]	23	48	2–146490–4
	△5 58.01 [2.284]	55.88 [2.200]	22	46	2–146490–3
OBSOLETE	△5 55.47 [2.184]	53.34 [2.100]	21	44	2–146490–2
	△5 52.93 [2.084]	50.80 [2.000]	20	42	2–146490–1
	△5 50.39 [1.984]	48.26 [1.900]	19	40	2–146490–0
	△5 47.85 [1.884]	45.72 [1.800]	18	38	1–146490–9
	△5 45.31 [1.784]	43.18 [1.700]	17	36	1–146490–8
	△5 42.77 [1.684]	40.64 [1.600]	16	34	1–146490–7
	△5 40.23 [1.584]	38.10 [1.500]	15	32	1–146490–6
OBSOLETE	△5 37.69 [1.484]	35.56 [1.400]	14	30	1–146490–5
	△5 35.15 [1.384]	33.02 [1.300]	13	28	1–146490–4
	△5 32.61 [1.284]	30.48 [1.200]	12	26	1–146490–3
	△5 30.07 [1.184]	27.94 [1.100]	11	24	1–146490–2
	△5 27.53 [1.084]	25.40 [1.000]	10	22	1–146490–1
OBSOLETE	△5 24.99 [.984]	22.86 [.900]	9	20	1–146490–0
	△5 22.45 [.884]	20.32 [.800]	8	18	146490–9
	△5 19.91 [.784]	17.78 [.700]	7	16	146490–8
	△5 17.37 [.684]	15.24 [.600]	6	14	146490–7
	△5 14.83 [.584]	12.70 [.500]	5	12	146490–6
	△5 12.29 [.484]	10.16 [.400]	4	10	146490–5
	△5 9.75 [.384]	7.62 [.300]	3	8	146490–4
	△5 7.21 [.284]	5.08 [.200]	2	6	146490–3
	△5 4.67 [.184]	2.54 [.100]	1	4	146490–2
	△5 2.13 [.084]	– –	–	2	146490–1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± 0.5[.02]
2 PLC ± 0.13[.005]
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL △4

FINISH SEE TABLE

DWN R BROWN	19OCT2006
CHK J GESFORD	19OCT2006
APVD J GESFORD	19OCT2006
PRODUCT SPEC	—
APPLICATION SPEC	—
WEIGHT	—

TE Connectivity

NAME HEADER ASSEMBLY, MOD II, STACKING, DOUBLE ROW, .025 SQ.POST, UNSHROUDED

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-146490	—

CUSTOMER DRAWING | SCALE 4:1 | SHEET 2 OF 2 | REV B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

5-146490-4