

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
G	14		H	REVISED PER ECO-14-015277	24FEB2015	NK	DR

AMP WIRE RANGE	 E13288 Listed	 LR7189 Certified
16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED

- 1

STAMP "AMP - SEE TABLE" APPROX AS SHOWN.
- 2

WIRE INSULATION DIA: SEE TABLE.
- 3

TONGUE MATERIAL THK: .031±.002.
- 4

BODY: TIN PLATE .000100 MIN EXT THK PER ASTM B545.
- 5

SLEEVE: TIN PLATE .000100 MIN EXT THK PER ASTM B545.
- 6


BODY & SLEEVE- CU PER ASTM B152
INSULATION - NYLON PER ASTM D4066
COLOR - BLUE.
- 7

APPLIES FROM EDGE OF METAL WIRE BARREL TO CENTER OF STUD HOLE.
- 8


MEETS MS25036-155, CLASS 1 & 2.
- 9

MEETS M7928/1-46, CLASS 1 & 2.
- 10

MEETS M7928/1-55, CLASS 1 & 2.

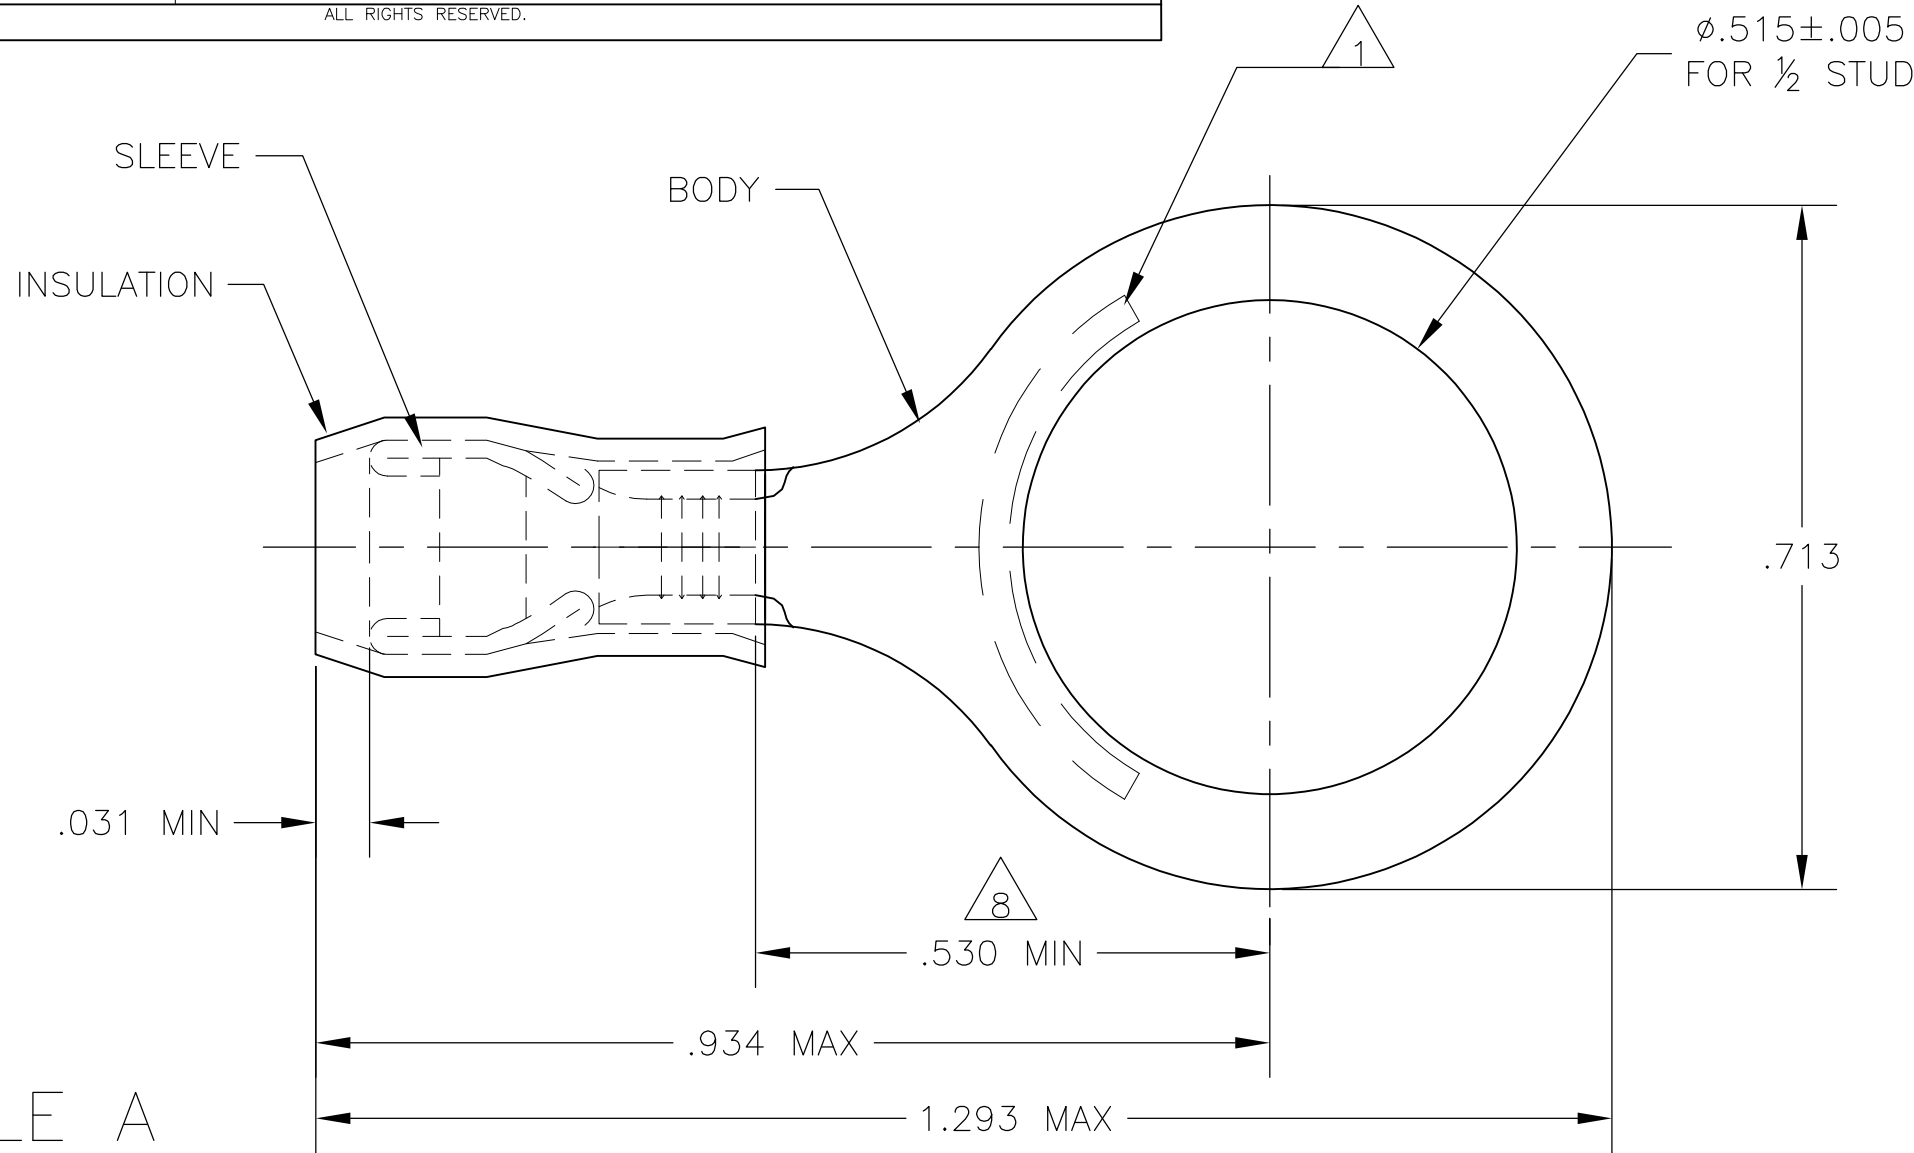

STYLE A

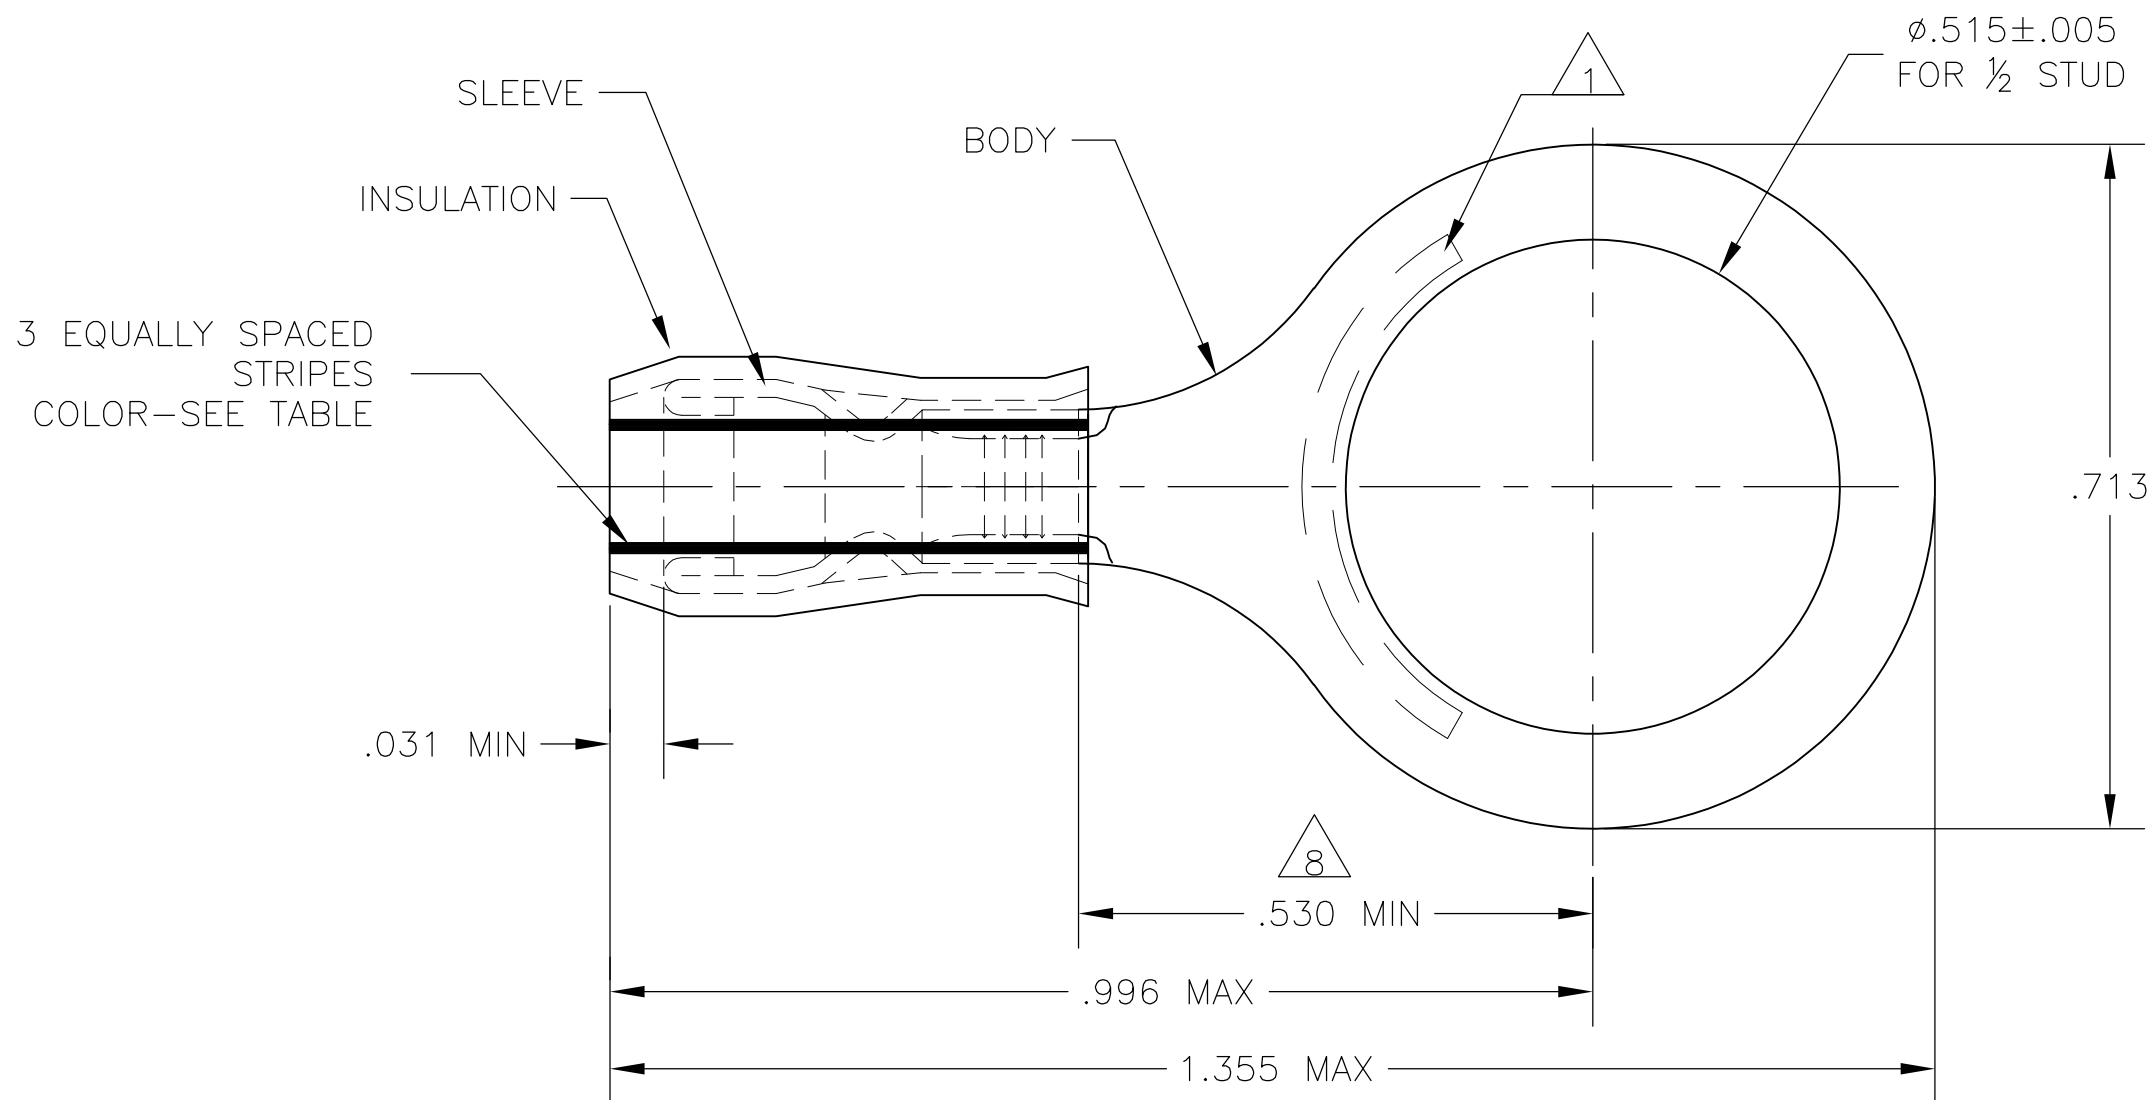

STYLE B
INSULATION RESTRICTING

500	LOOSE PIECE	14	.078-.130	14	GREEN	B	△ 4	△ 5	△ 10 2-328976-2				
500	LOOSE PIECE	16	.063-.130	16	BLUE	B			△ 9 2-328976-1				
500	LOOSE PIECE	16-14	.105-.150	16-14	--	A			△ 8 328976				
QTY	PACKAGE TYPE	STAMPING	WIRE INSUL DIA	WIRE SIZE	STRIPE COLOR	STYLE	BODY	SLEEVE	PART NO				
							FINISH						
RECOMMENDED OPERATING TEMPERATURE:		THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN JR RUTH	13JAN10	TE TE Connectivity						
105°C MAX					CHK T MICHELUTTI	13JAN10							
VOLTAGE RATING: 300 VOLT MAX		DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD T MICHELUTTI	13JAN10	NAME TERMINAL, RING TONGUE, PIDG WIRE SIZE: 16-14 AWG						
CIRCULAR MIL AREA:					PRODUCT SPEC								
CROSS SECTION: 1.62mm² [2,050-5,180] STRANDED OR SOLID		⊗	1 PLC ± - 2 PLC ± - 3 PLC ± .008 4 PLC ± - ± - ANGLES		APPLICATION SPEC		SIZE CAGE CODE DRAWING NO RESTRICTED TO						
					—								
		MATERIAL	FINISH		WEIGHT	—	A2	00779	C=328976	—			
					CUSTOMER DRAWING			SCALE	5:1	SHEET	1 of 1	REV	H

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-328976-2](#)