

REV. C
DCO 300853

TOLERANCES ± 0.010 " - UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C
~~RESISTANCE~~ _____ CURRENT: 40mA MAX.
 NOMINAL VOLTAGE _____ 115 VAC - 400Hz
 MUST OPERATE _____ 70.0 VAC MAX., 400Hz

 MUST RELEASE _____ 25.0 VAC MAX., 8.0 VAC MIN., 400 Hz


ENVIRONMENT:
 VIBRATION _____ 33 _____ Hz TO _____ 3000 _____ Hz @ _____ 20 _____ g's
 SHOCK _____ 100 _____ g's _____ 6 _____ MS. DURATION
 TEMPERATURE _____ -70 _____ °C TO _____ +125 _____ °C

NOTES: OPERATE TIME 20 MS MAX.

 RELEASE TIME 50 MS MAX.

 CONTACT BOUNCE 1 MS MAX.

CUSTOMER DATA SHEET

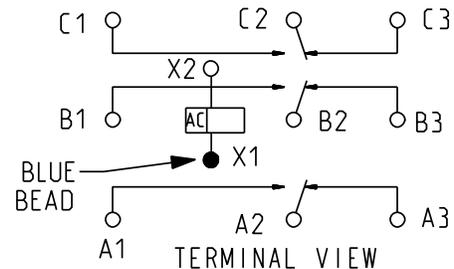

CONTACT RATING: _____
 25 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE
 50,000 OPERATIONS

DR. B.D. 10APR2008 | CK. J.M.B. 5/14/08

Tyco Electronics ©COPYRIGHT 2005
 TYCO ELECTRONICS CORPORATION
 ALL INTERNATIONAL RIGHTS RESERVED

CUST. _____ CATALOG _____
 CUST. NO. _____ REV. N/A _____

TE NUMBER
6-1617753-1

CII PART NUMBER
FCA-325-CX8

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[FCA-325-CX8](#)