

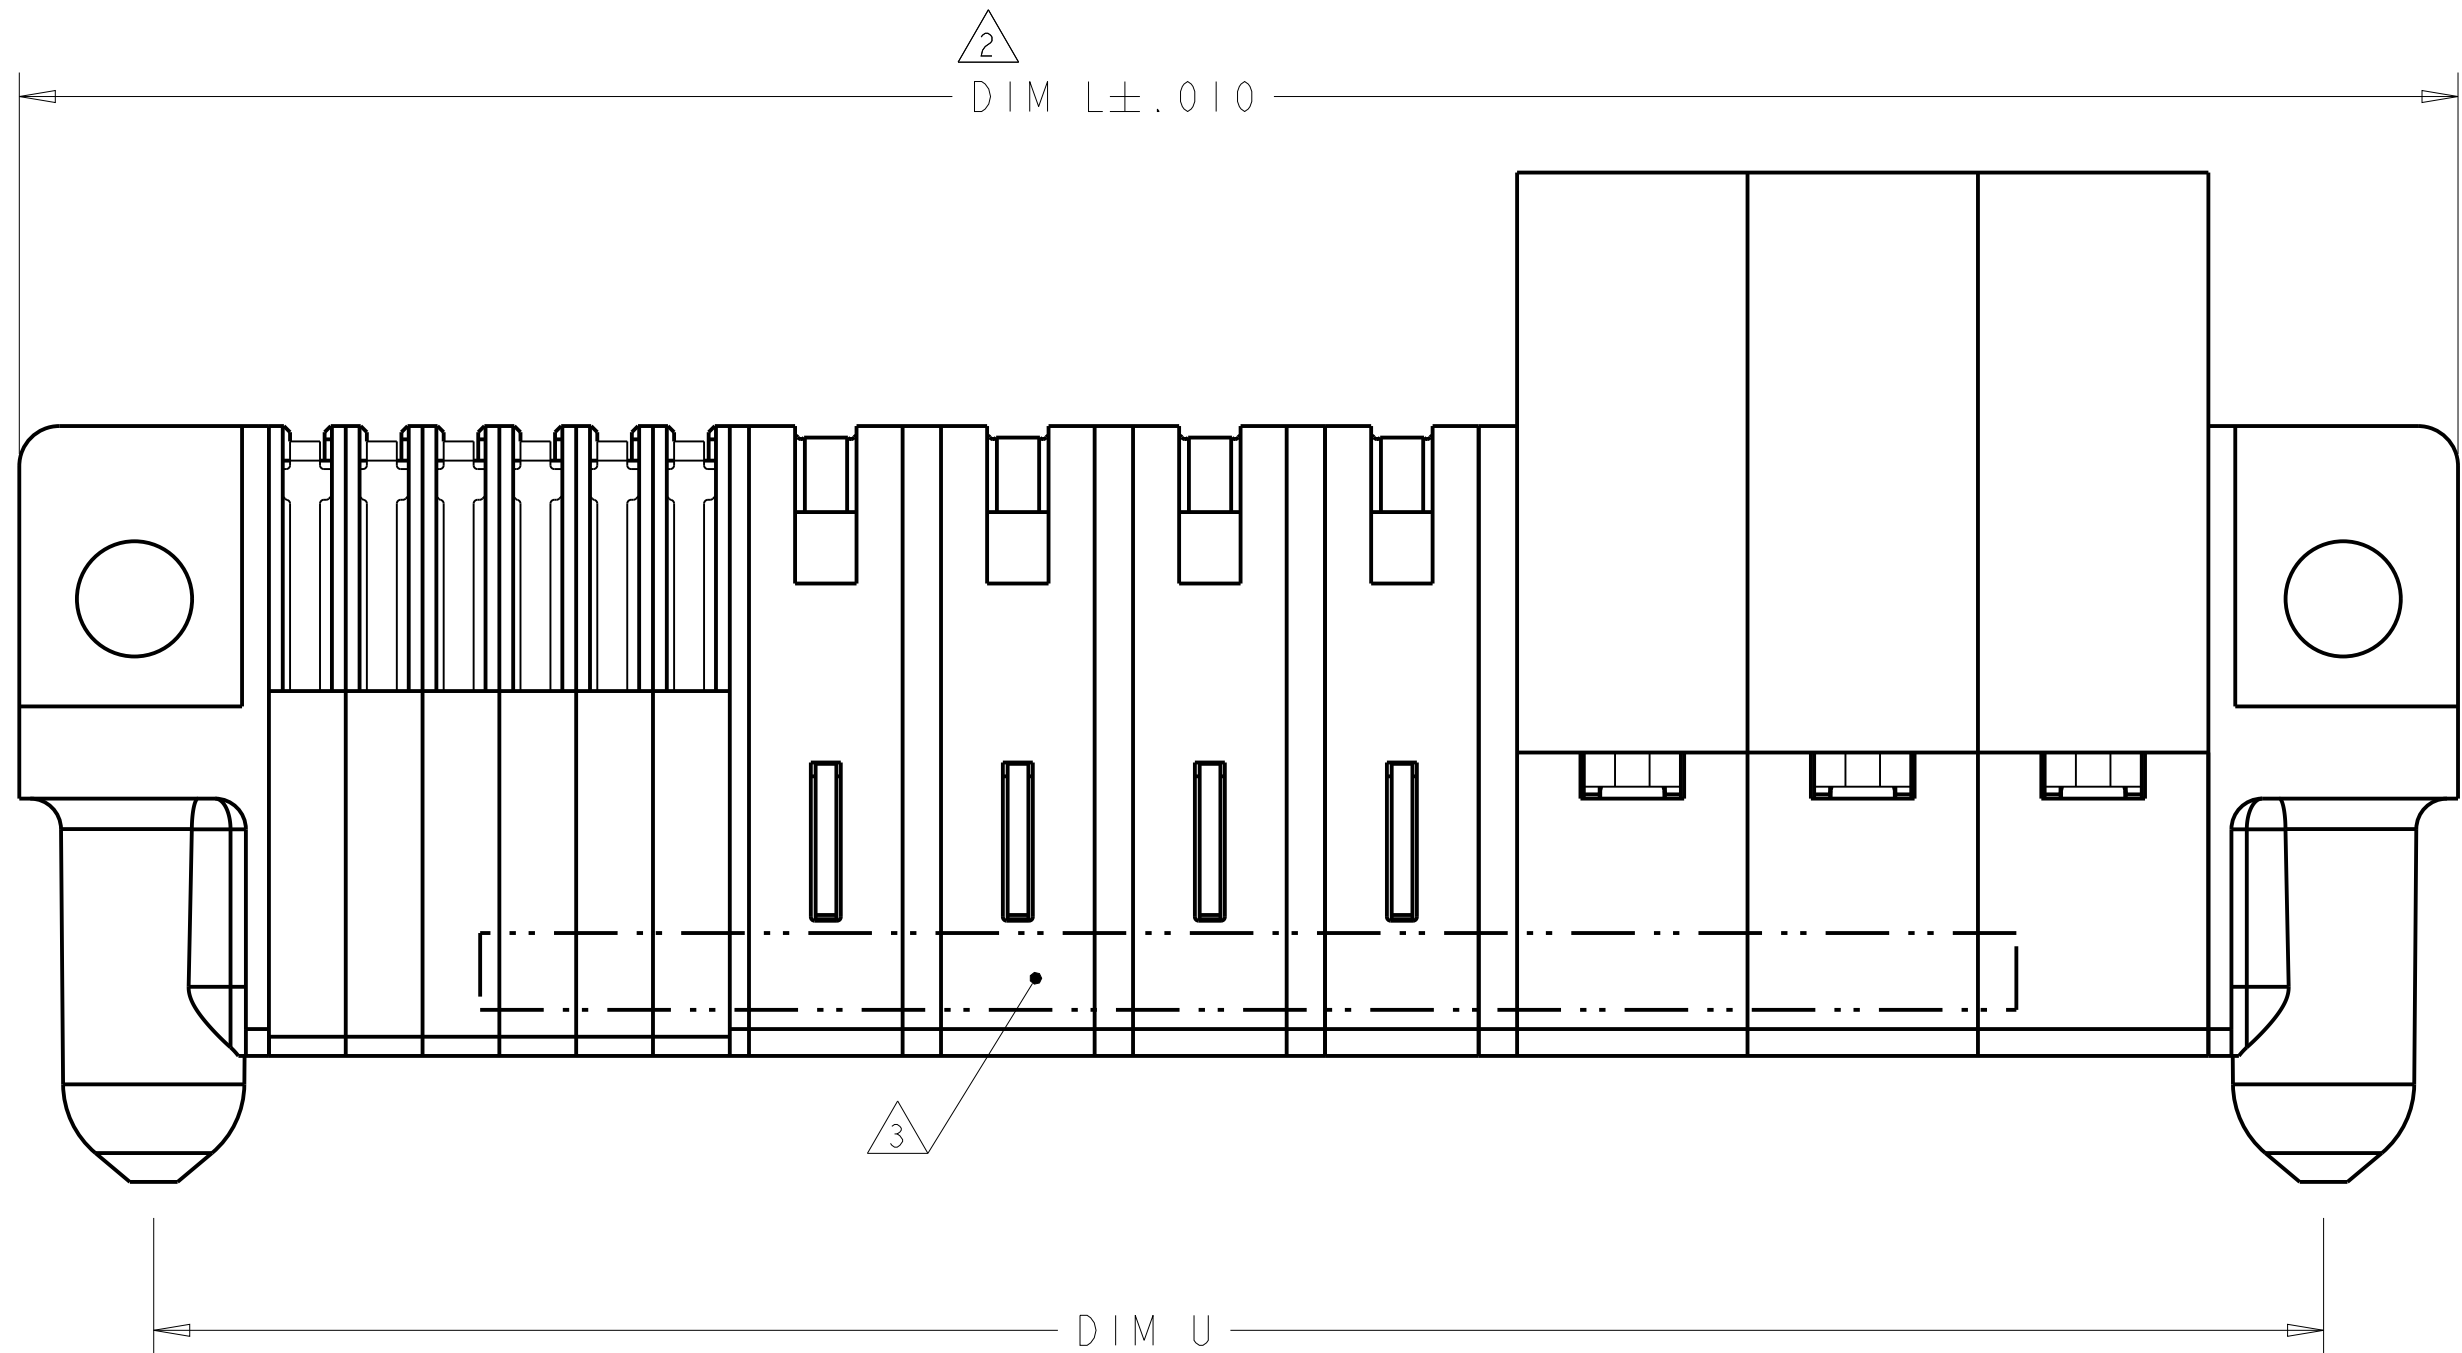
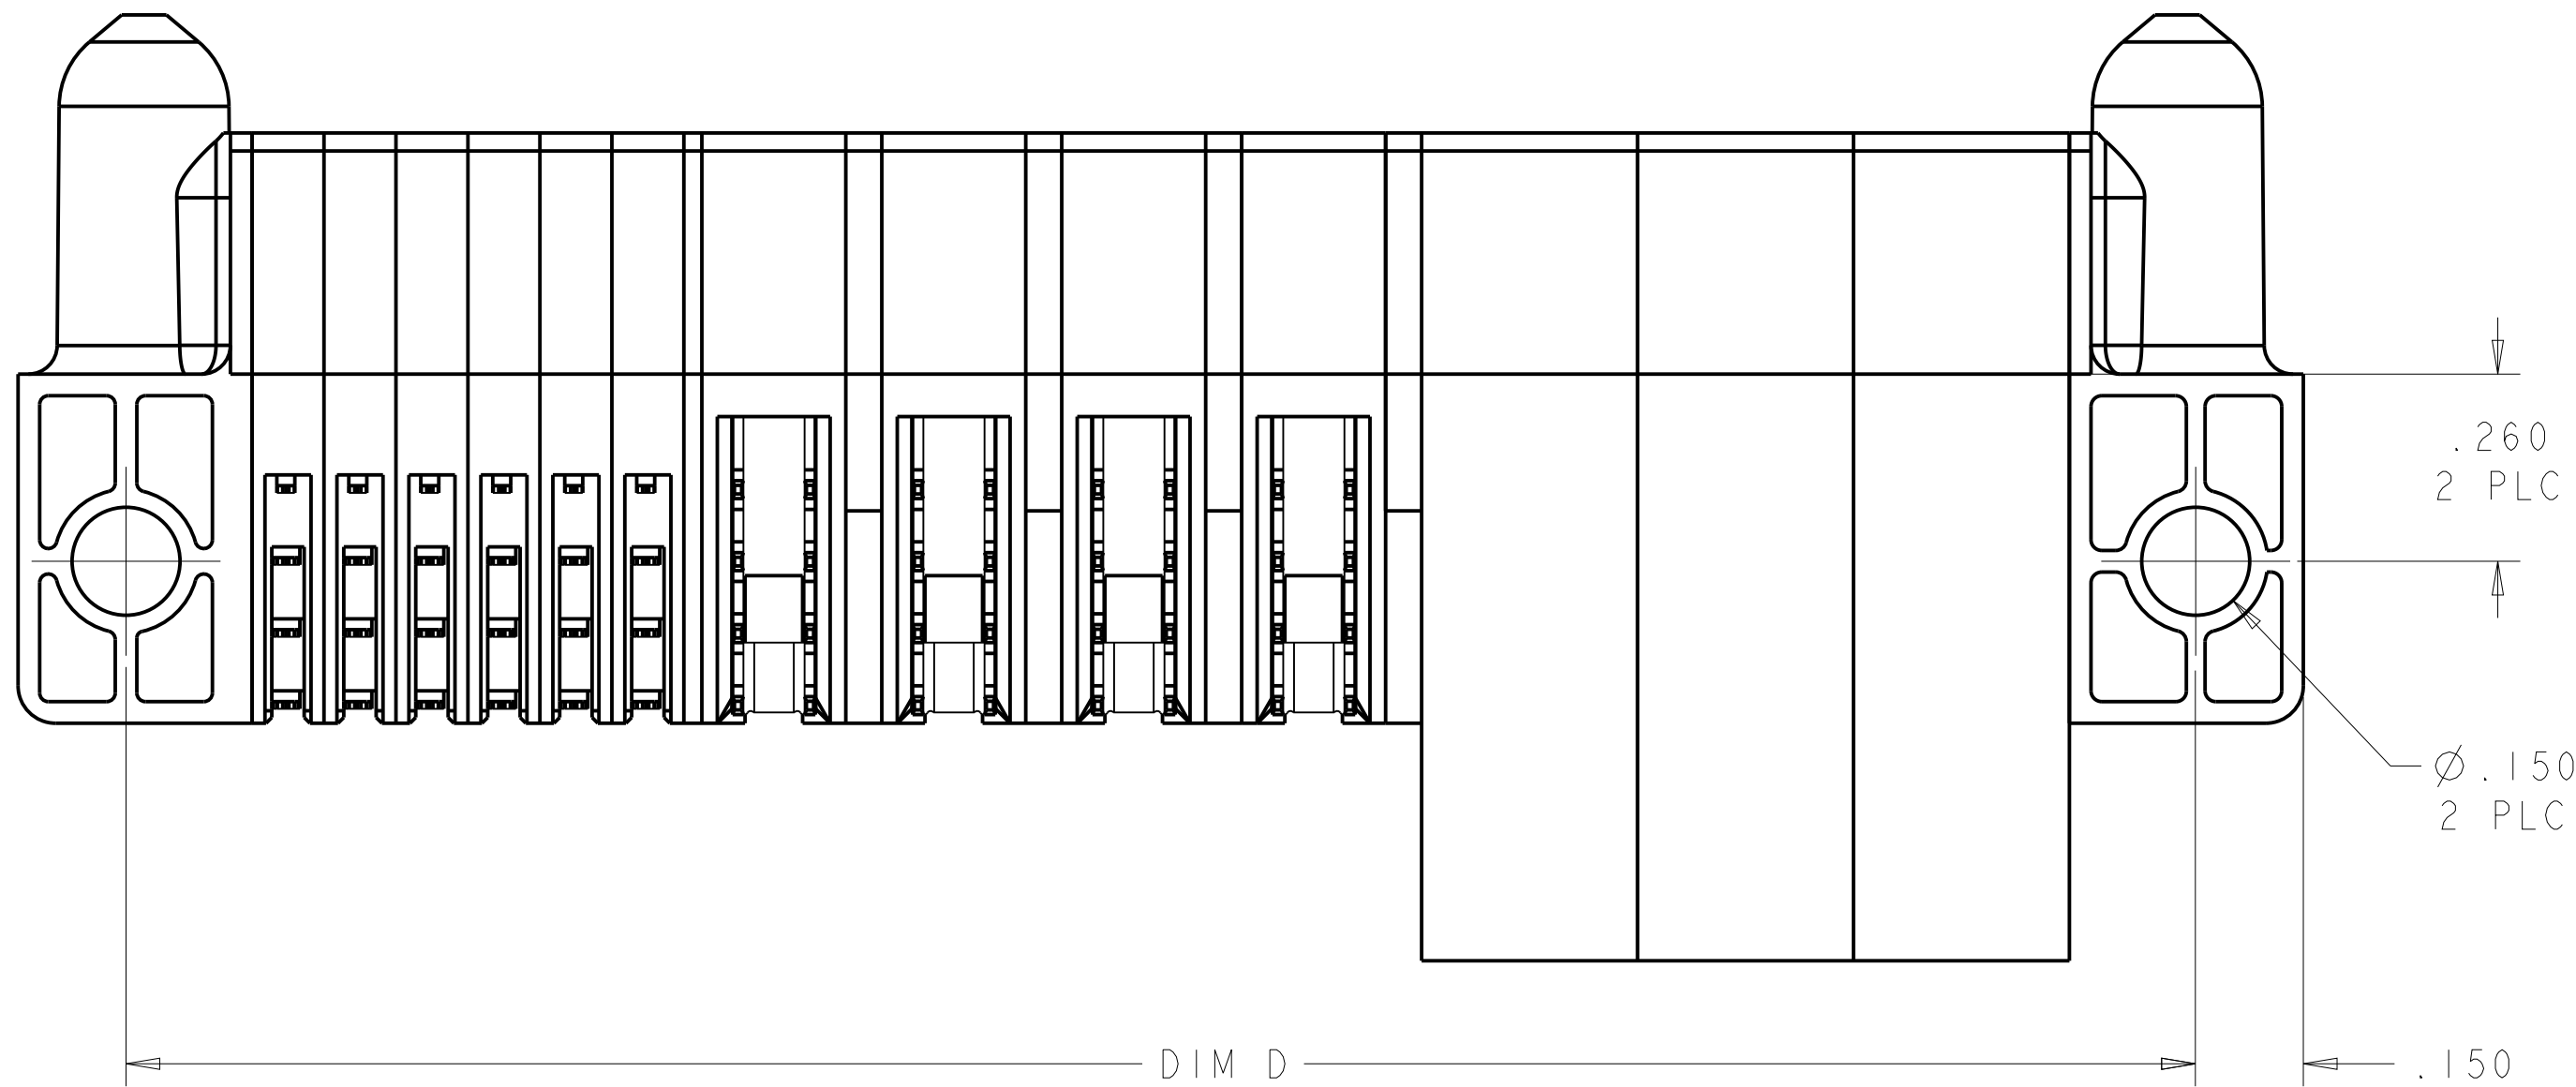


LOC		DIST		REVISIONS				
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		C6		ADDED NEW DASH NUMBER -7	29JAN2014	CZ	SZ	

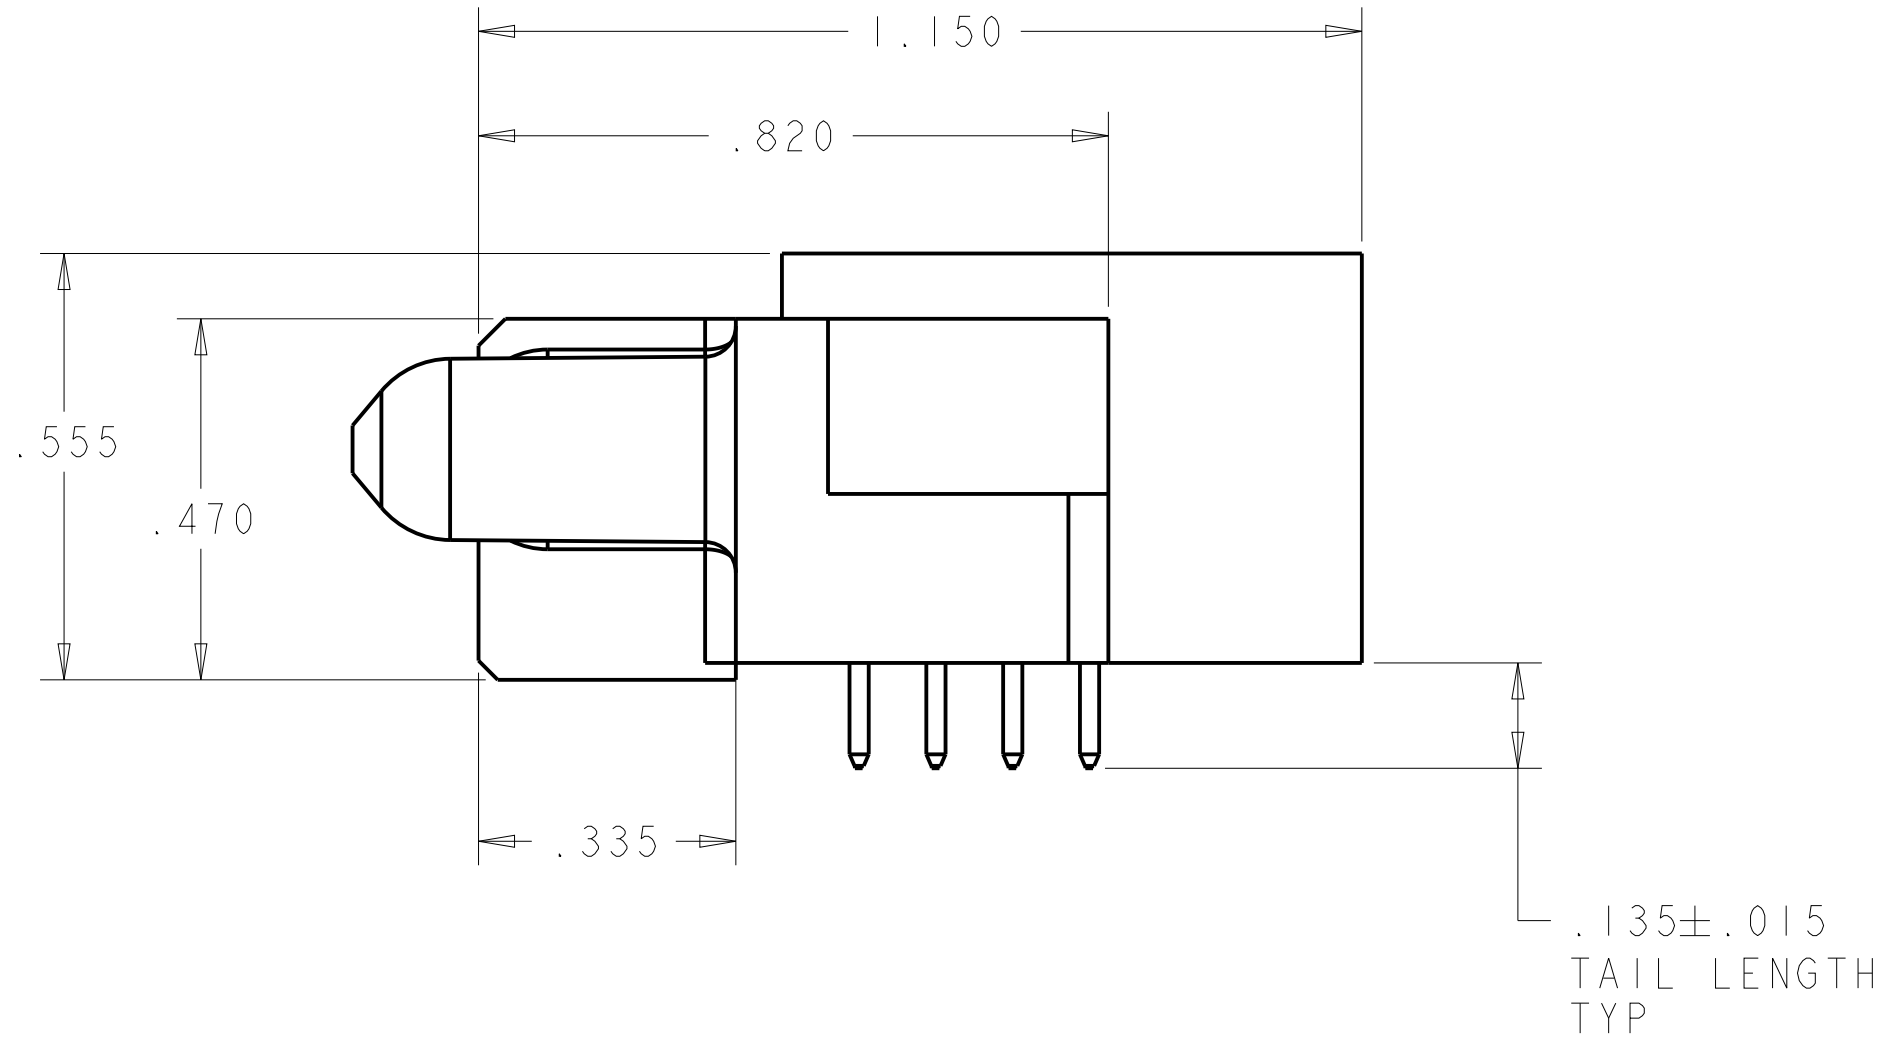

- △1 DIMENSION IS CENTERLINE SPACING OF POWER MODULES ON RIGHT SIDE OF HOUSING.
- △2 THE MAXIMUM OVERALL LENGTH OF A PART IS 8.00.
- △3 "AMP", PART NUMBER AND DATE CODE TO BE MARKED IN AREA SHOWN. PARTS UNDER 2.00 LONG MAY BE MARKED ON BOTH SIDES.
- △4 MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, UL94 V-O.
SIGNAL CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- △5 CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA OF POWER AND SIGNAL CONTACTS
- △6 MECHANICAL CONNECTOR KEEP OUT ZONE.
- △7 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- △8 PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES
- △9 PCB - .0453±.0010 DRILLED HOLES PLATED WITH .0003 MIN Sn OVER .001 TO .003 Cu PLATING TO ACHIEVE A .040 DIAMETER HOLE
- △10 A/C POWER CABLE CONTACT LOADED IN THESE CAVITIES.
- △11 VARIABLE DIMENSION SHOW ON VIEW.

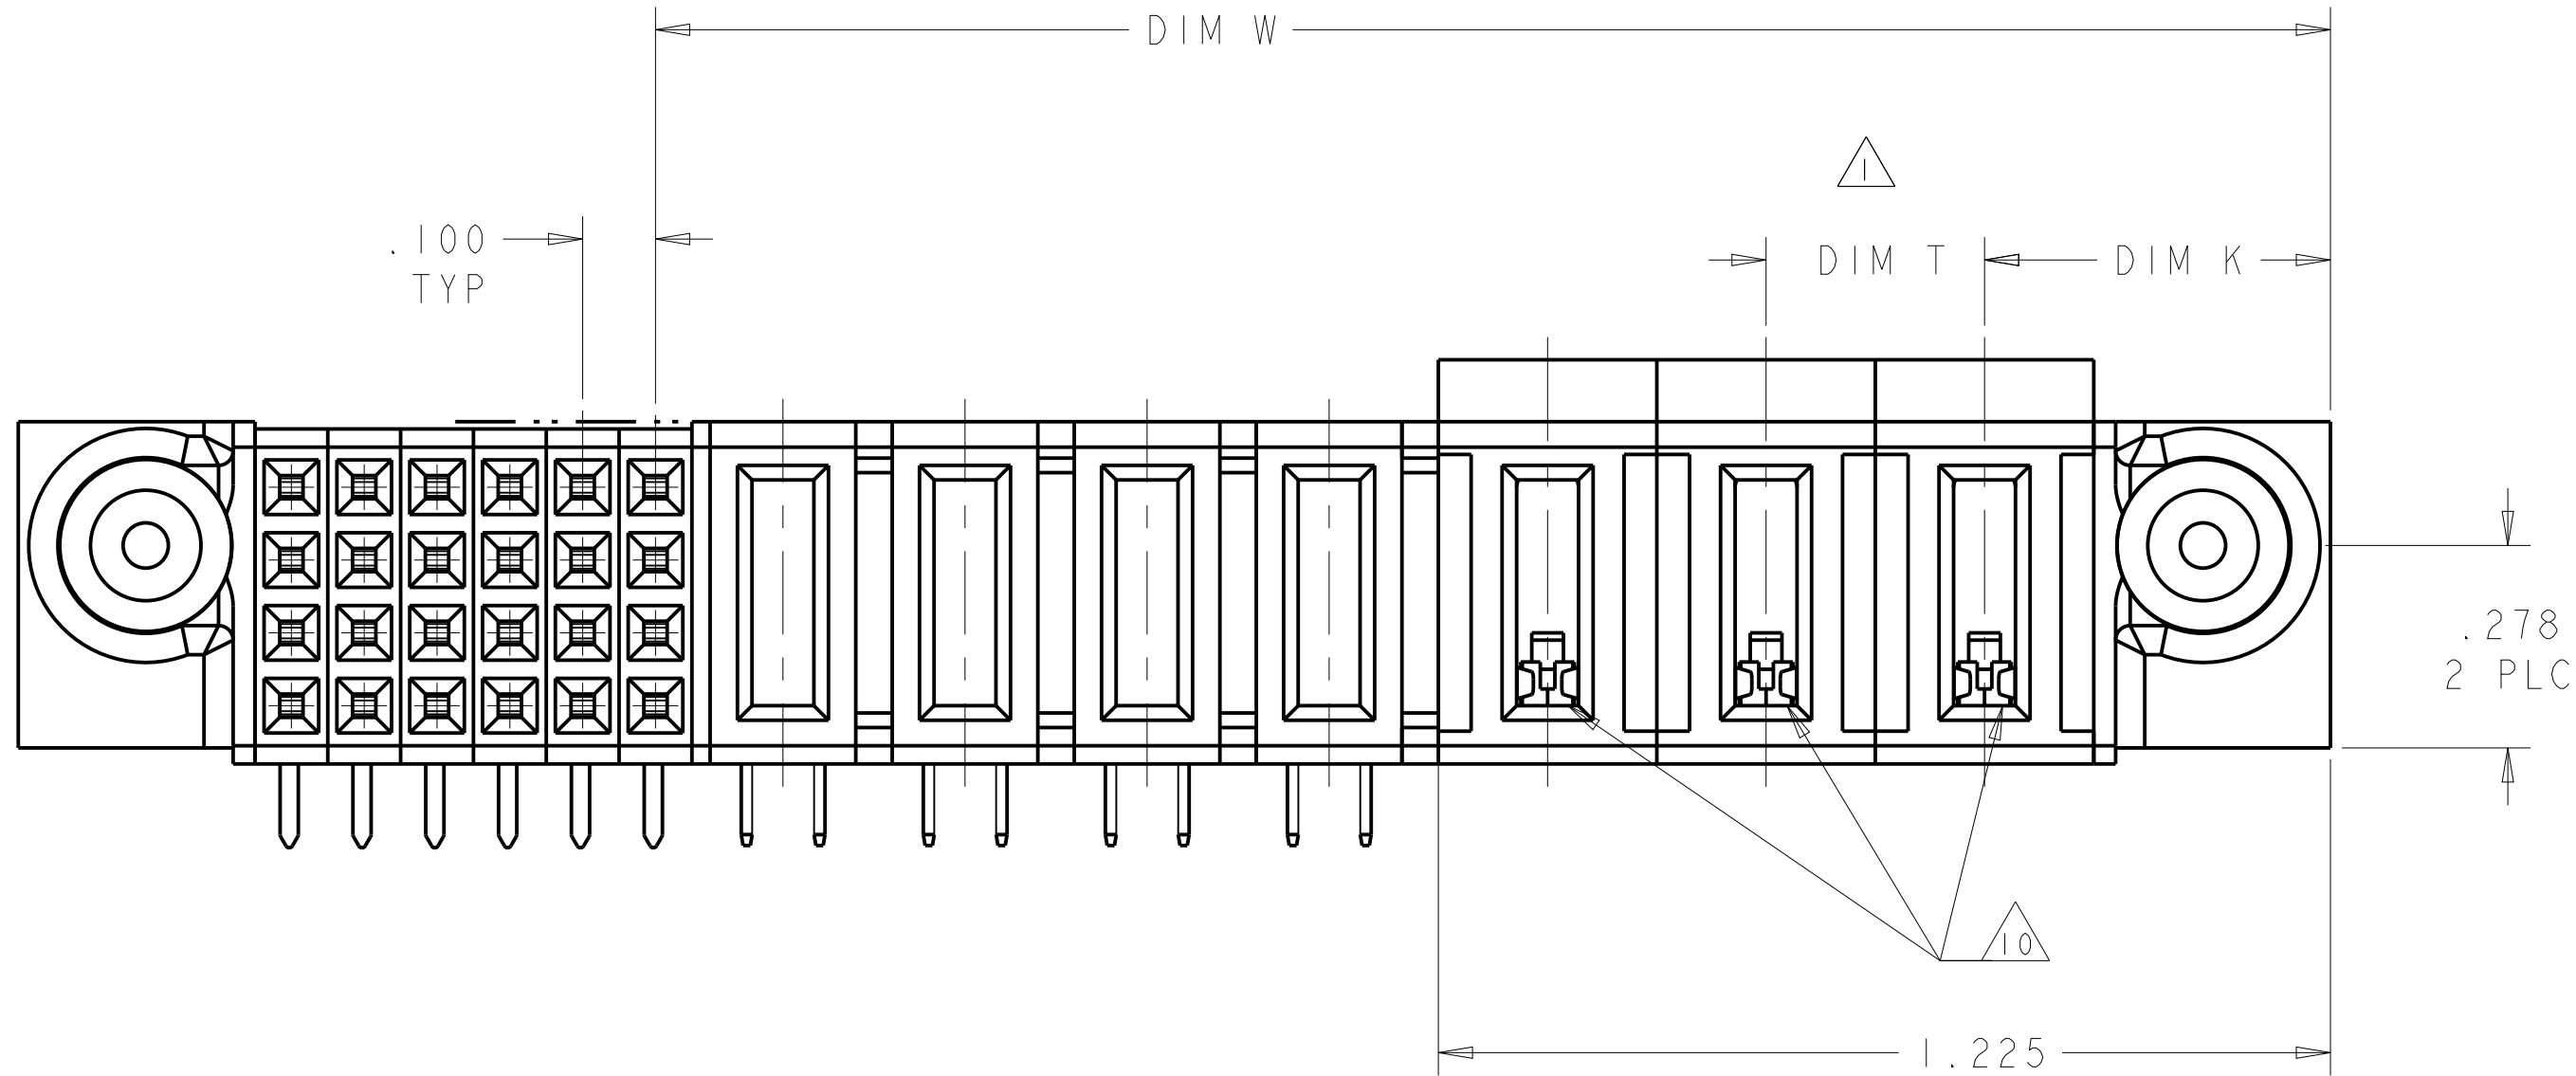

C5	△2.775	△.250	.300	1.900	4.125	4.175	4.475	.475	5ACP + 32S + 6P	6450378-7
	-	-	△.300	2.300	2.825	2.875	3.175	.475	3ACP + 4P + 24S	6450378-6
	△2.775	△.250	.300	1.900	4.125	4.175	4.475	.475	5ACP + 32S + 6P	6450378-5
	-	-	.300	1.275	1.600	1.650	1.950	.475	3ACP + 16S	6450378-4
	-	-	△.300	2.675	3.225	3.275	3.575	.525	3ACP + 6P + 24S	6450378-3
	-	-	△.300	2.300	2.825	2.875	3.175	.475	3ACP + 4P + 24S	6450378-1
	DIM R	DIM S	DIM T	DIM W	DIM U	DIM D	DIM L	DIM K	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±.2°
FINISH

DWN
D. ZHU
CHK
S. ZHAO
APVD
S. YAO

26JUN2007
26JUN2007

PRODUCT SPEC
108-1973
APPLICATION SPEC
114-13038

WEIGHT
-

CUSTOMER DRAWING

NAME
RIGHT ANGLE RECEPTACLE ASSEMBLY
A/C PASS THRU W/GUIDES
MULTI-BEAM XL

SIZE
A1

CAGE CODE
00779

DRAWING NO
6450378

RESTRICTED TO
-



SCALE
4:1

SHEET
1

OF
5

REV
C6

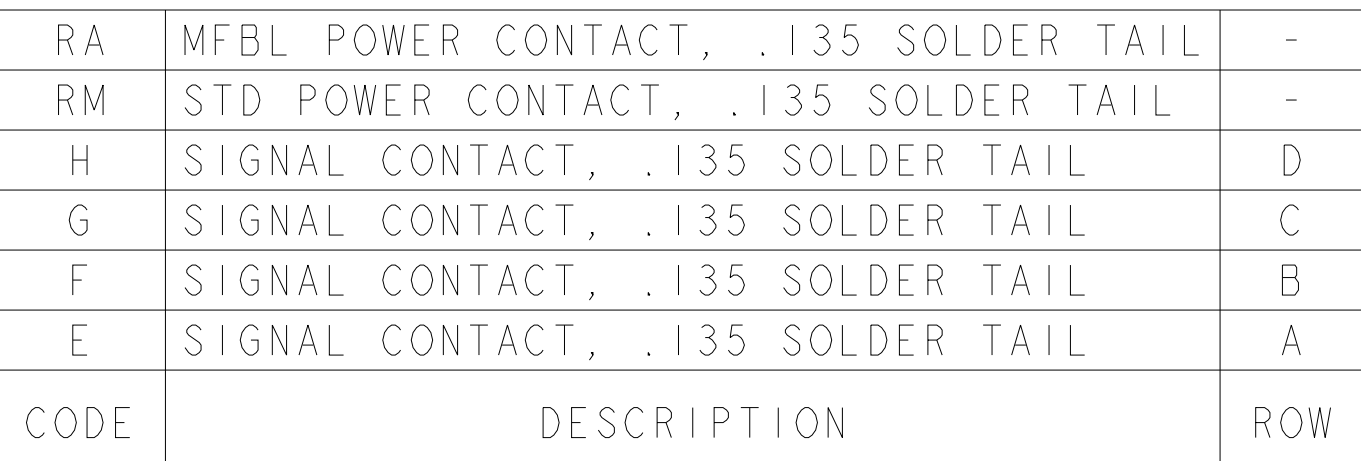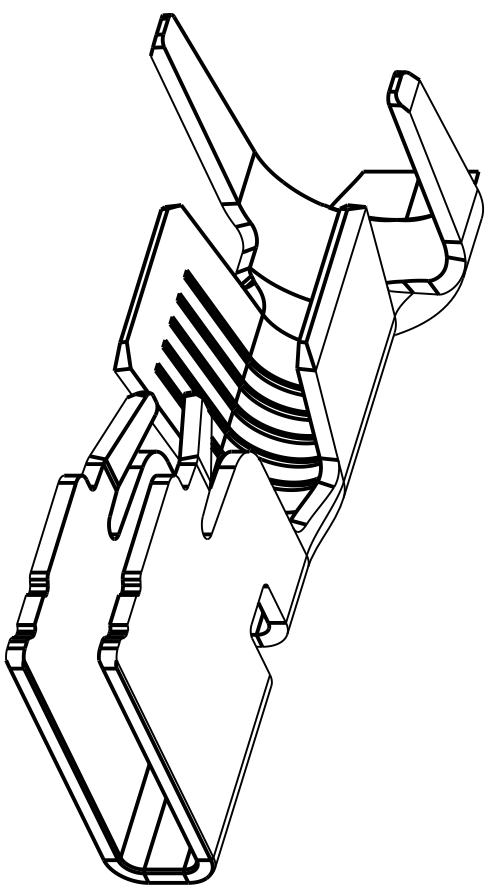


4805 (3/11)

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-


PART NUMBER	ROWS		SIGNAL						POWER									
			6	5	4	3	2	1	P9	P8	P7	P6	P5	P4	P3	P2		P1
6450378-3	D C B A		H	H	H	H	H	H	RM	RM	RM	RM	RM	RM	MFBL	STD	STD	
			G	G	G	G	G	G										
			F	F	F	F	F	F										
			E	E	E	E	E	E										
3ACP + 6P + 24S																		

.200 2PLC

.250

.200 2PLC

.300 3PLC

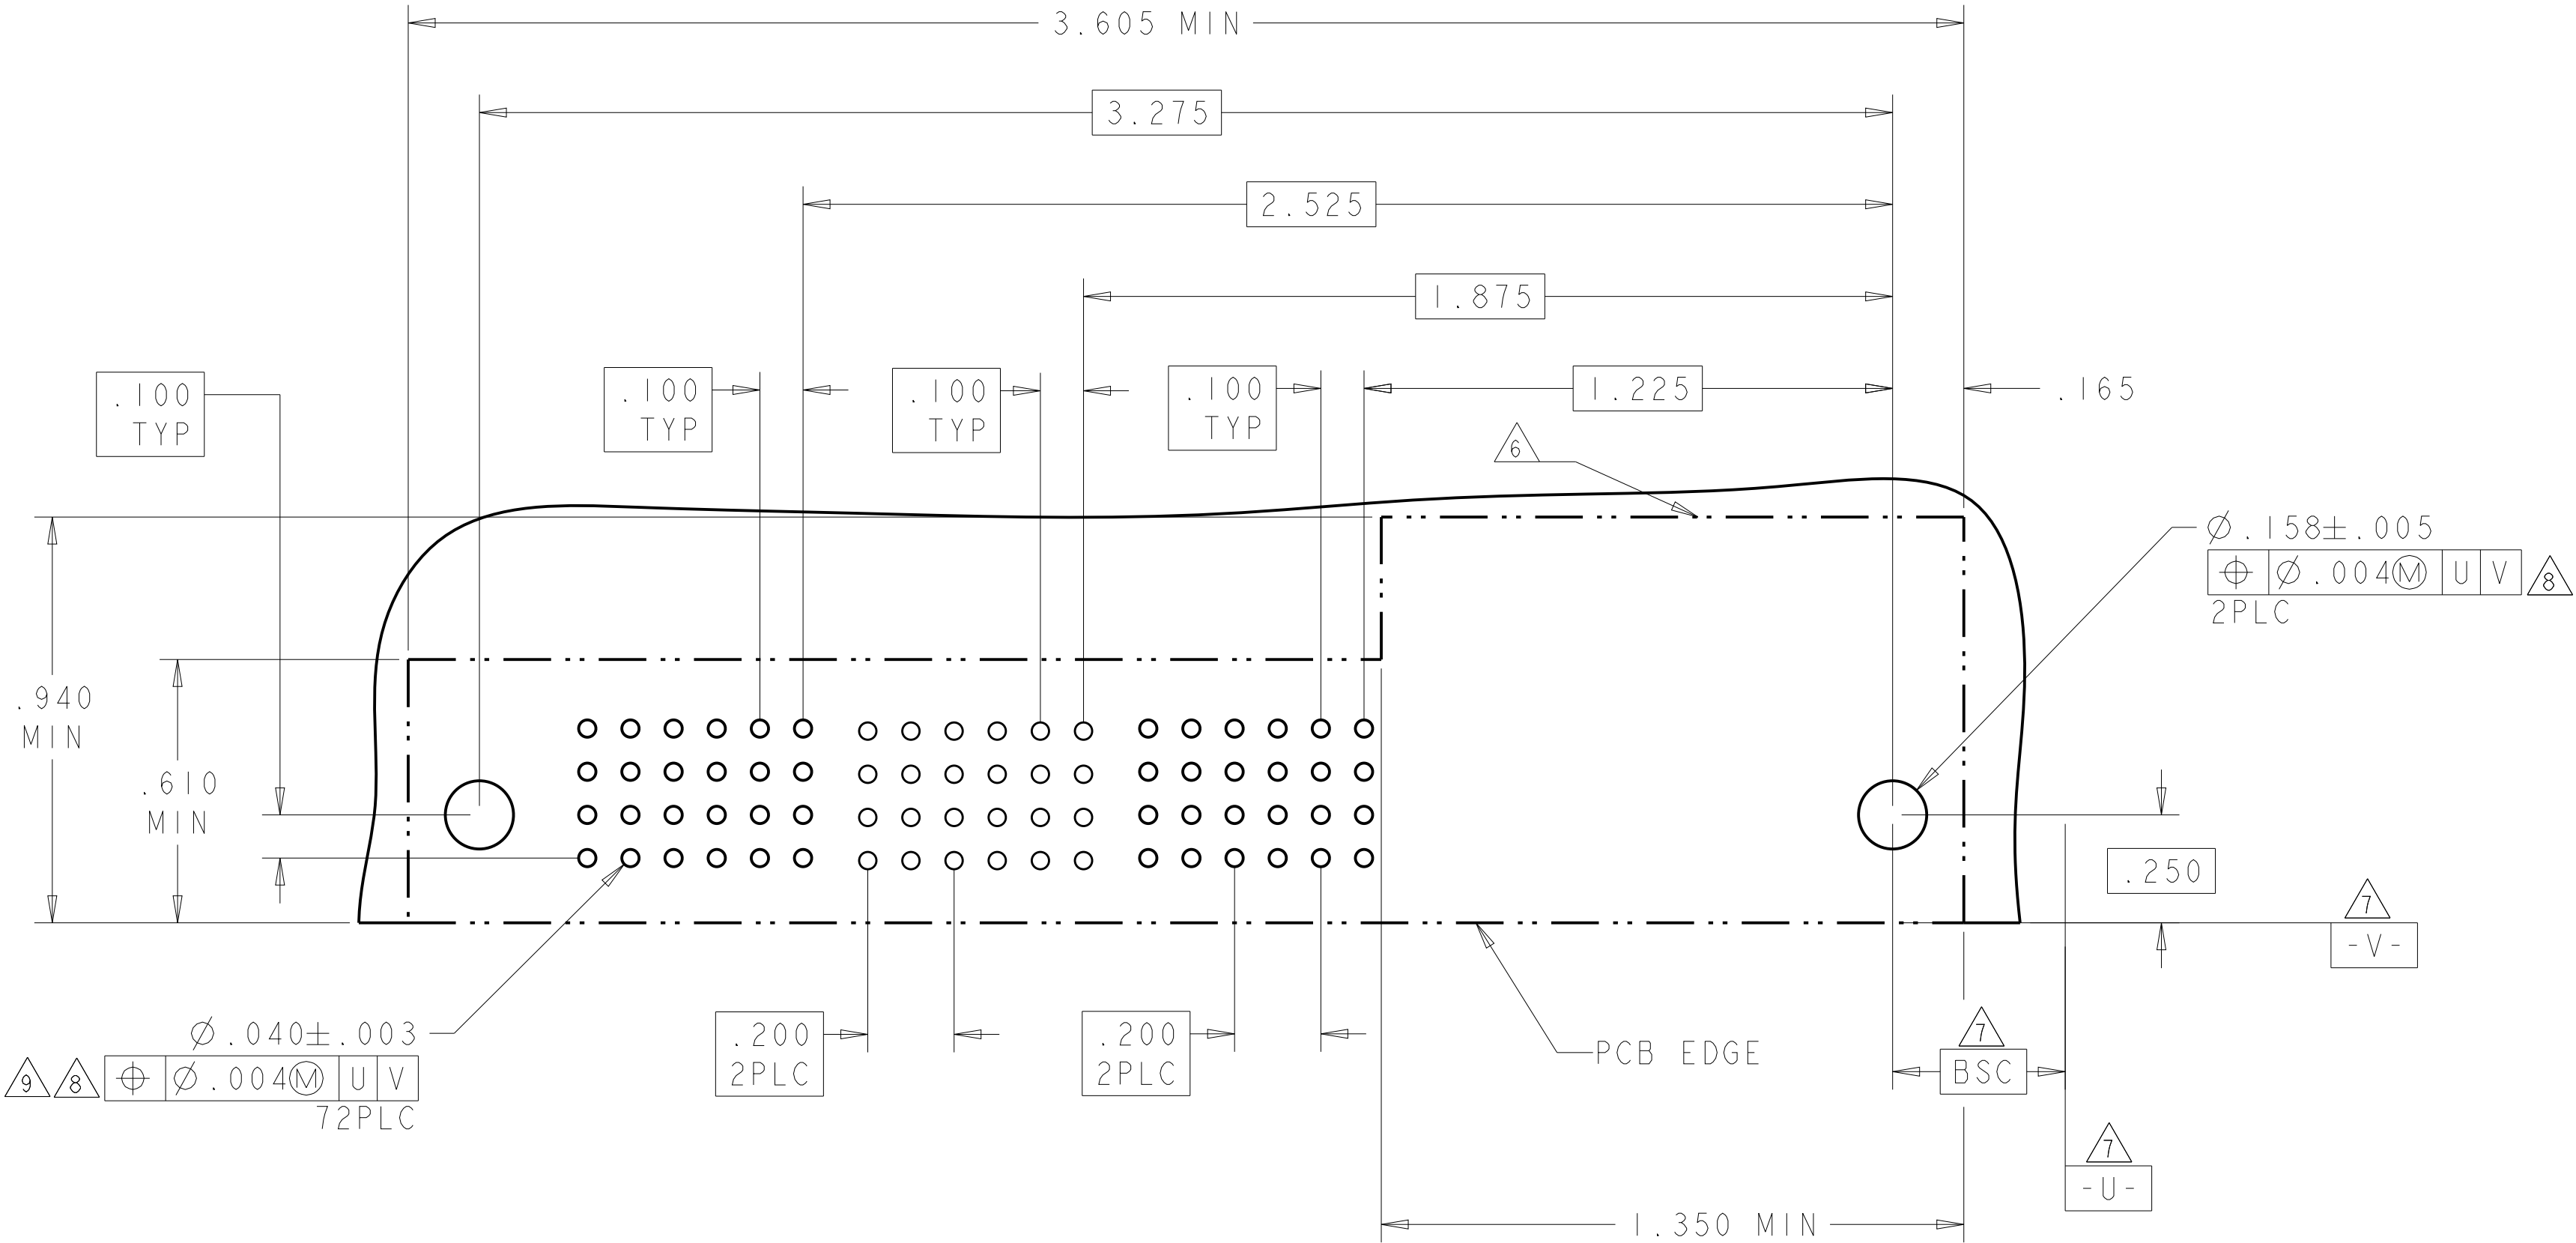

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

D. ZHU

26JUN2007

DIMENSIONS:

INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±"

1 PLC ±.01

2 PLC ±.01

3 PLC ±.005

4 PLC ±.0020

ANGLES ±2°

FINISH -

MATERIAL

-

DRAWING NO

108-1973

APPLICATION SPEC

114-13038

WEIGHT

-

CUSTOMER DRAWING

DWN

S. ZHAO

26JUN2007

CHK

S. ZHAO

26JUN2007

APVD

S. YAO

-

PRODUCT SPEC

108-1973

APPLICATION SPEC

114-13038

WEIGHT

-

CUSTOMER DRAWING

NAME

RIGHT ANGLE RECEPTACLE ASSEMBLY
A/C PASS THRU W/GUIDES
MULTI-BEAM XL

SIZE

A1

CAGE CODE

100779

DRAWING NO

6450378

RESTRICTED TO

-

SCALE

4:1

SHEET

3

OF

5

REV


C6

TE Connectivity


Technical drawing of a window blind assembly. The drawing shows a side view of the blind with various components labeled. The dimensions are indicated by arrows and text:

- DIM S TYP**: Dimension S, typical.
- DIM R**: Dimension R.
- DIM W**: Dimension W.
- DIM K**: Dimension K.

The drawing includes a detailed view of the blind's structure, showing the slats and the mounting mechanism. The slats are labeled with 'S' and 'R'.

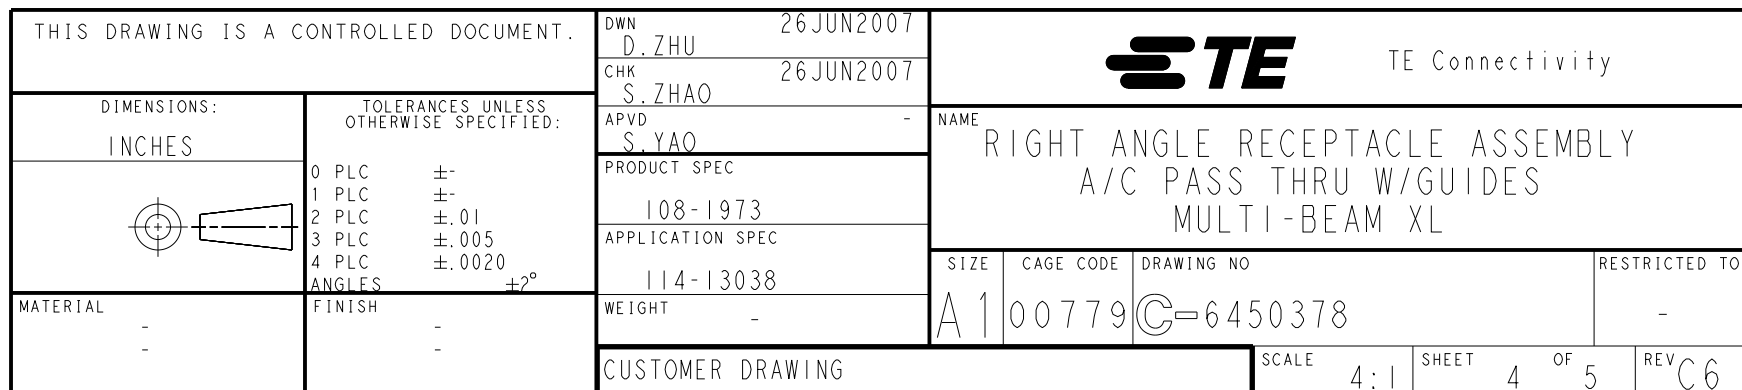-NO CONTACTS LOADED

PART NUMBER	ROWS		POWER *							SIGNAL							POWER					
			P11	P10	P9	P8	P7	P6	8	7	6	5	4	3	2	1	P5	P4	P3	P2	P1	
6450378-7	D C B A																					
5ACP + 32S + 6P																						

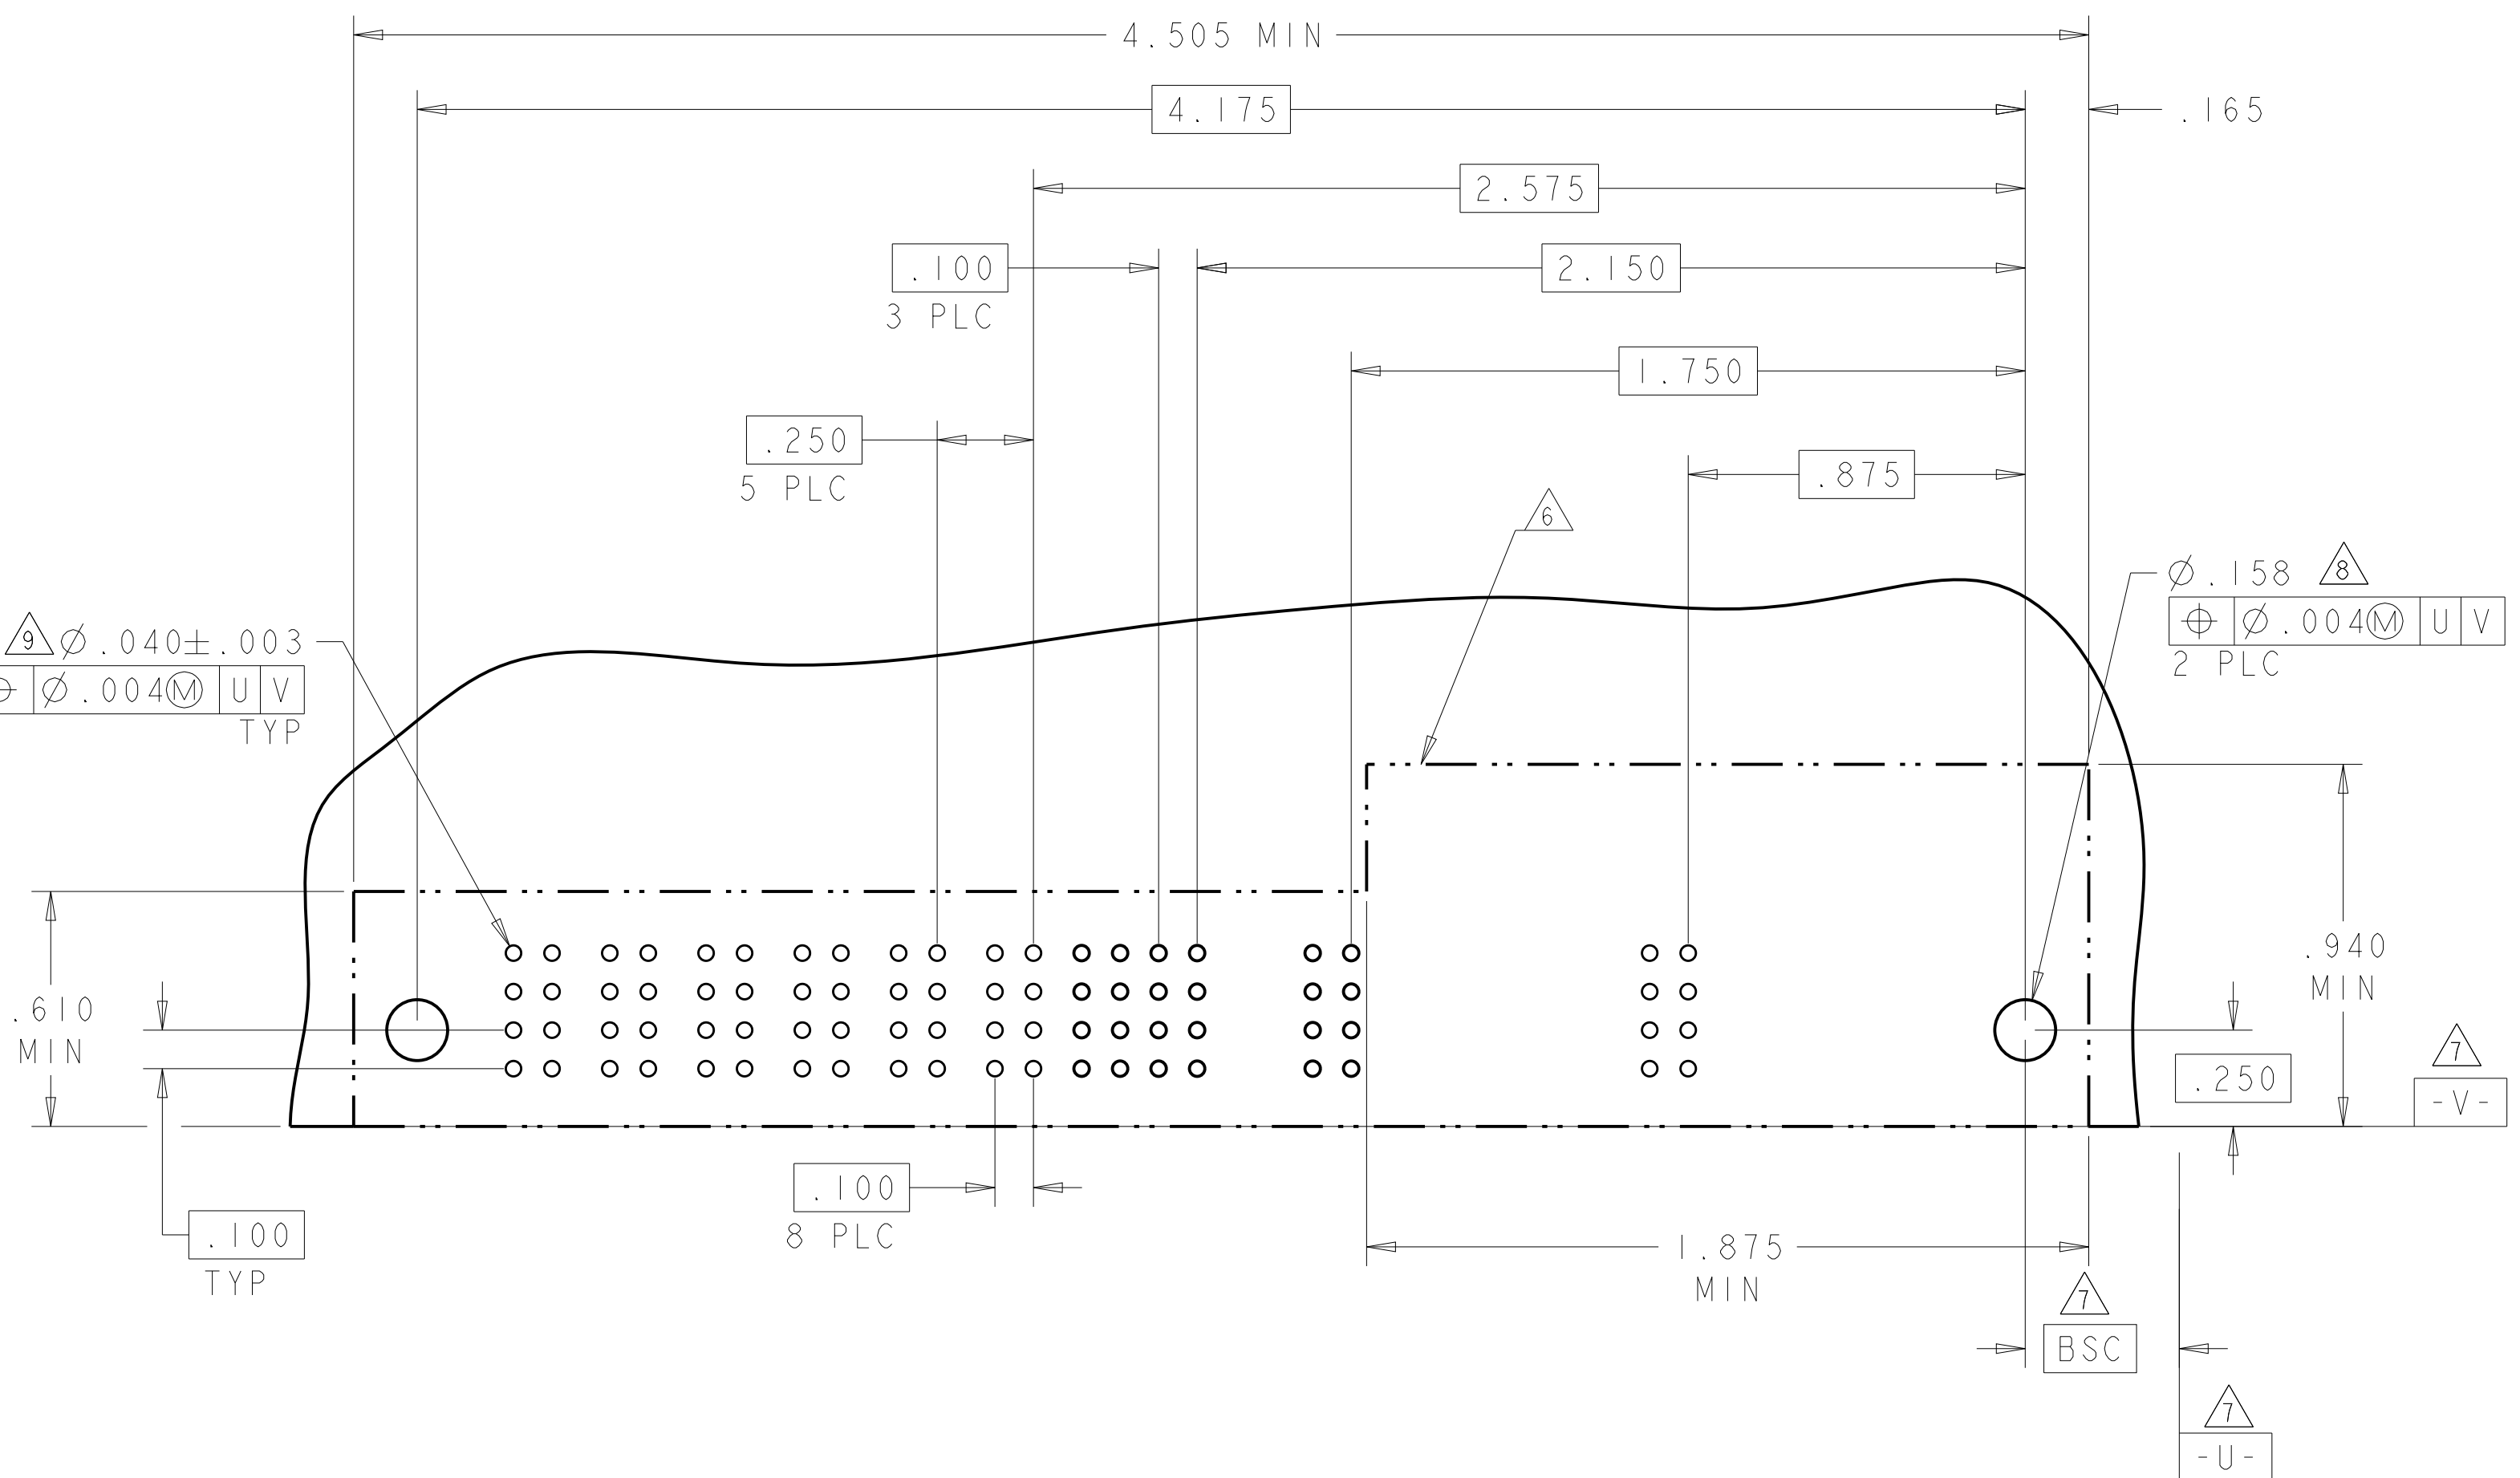4805 (3/11)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6450378-5](#)