


LOC —	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			G	CONTACT PIN MATERIAL AND PLATING CHANGE	18JUL2014	KJK	JK


POS.	L±0.3	PART NUMBER
—	—	—
2	5.08	827 730 2
3	7.62	3
4	10.16	4
5	12.70	5
6	15.24	6
7	17.78	7
8	20.32	8
9	22.86	9
10	25.40	10
11	27.94	11
12	30.48	12
13	33.02	13
14	35.56	14
15	38.10	15
16	40.64	16
17	43.18	17
18	45.72	18
19	48.26	19
20	50.80	20
21	53.34	21
22	55.88	22
23	58.42	23
24	60.96	24
25	63.50	25
26	66.04	26
27	68.58	27
28	71.12	28
29	73.66	29
30	76.20	30
31	78.74	31
32	81.28	32
33	83.82	33
34	86.36	34
35	88.90	35
36	91.44	36
37	93.98	37
38	96.52	38
39	99.06	39
40	101.60	40
41	104.14	41
42	106.68	42
43	109.22	43
44	111.76	44
45	114.30	45
46	116.84	46
47	119.38	47
48	121.92	48
49	124.46	49
50	127.00	50

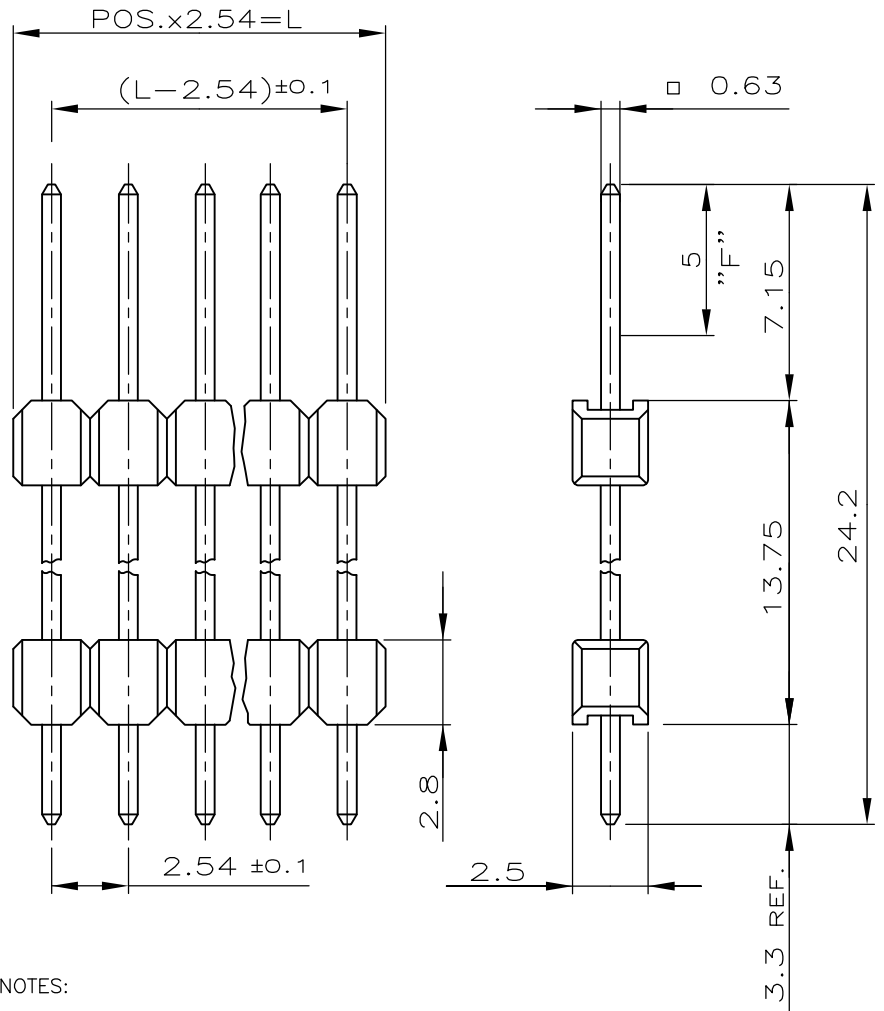

NOTES:

- 1 MATING SIDE: MIN. 0.7µm PdNi + MIN. 0.1µm GOLD FLASH BY AREA "F" OVER 1.27µm NICKEL
SOLDER SIDE: MIN. 2.5µm TIN OVER 1.27µm NICKEL
- 2 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 3 OBSOLETE

CONTACT PIN	CuZn	1
PIN HOUSING	PBT	GREEN
DESCRIPTION	MATERIAL	FINISH
		COLOR

DIMENSIONS:		DWN	31.08.89		MATERIAL		SEE TABLE		FINISH		SEE TABLE			
mm		CHK	—		TE Connectivity									
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	—											
±0.2 mm		PRODUCT SPEC		NAME										
0 PLC ± —		108—18012												
1 PLC ± —		APPLICATION SPEC		SPEC. AMPMODU II PIN HEADER SINGLE ROW										
2 PLC ± —		—												
3 PLC ± —		WEIGHT		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO				
4 PLC ± —				A4		00779		C—827730		—				
ANGLES ± —														
														
CUSTOMER DRAWING							SCALE		4:1		SHEET 1 of 1		REV G	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-827730-0](#)