


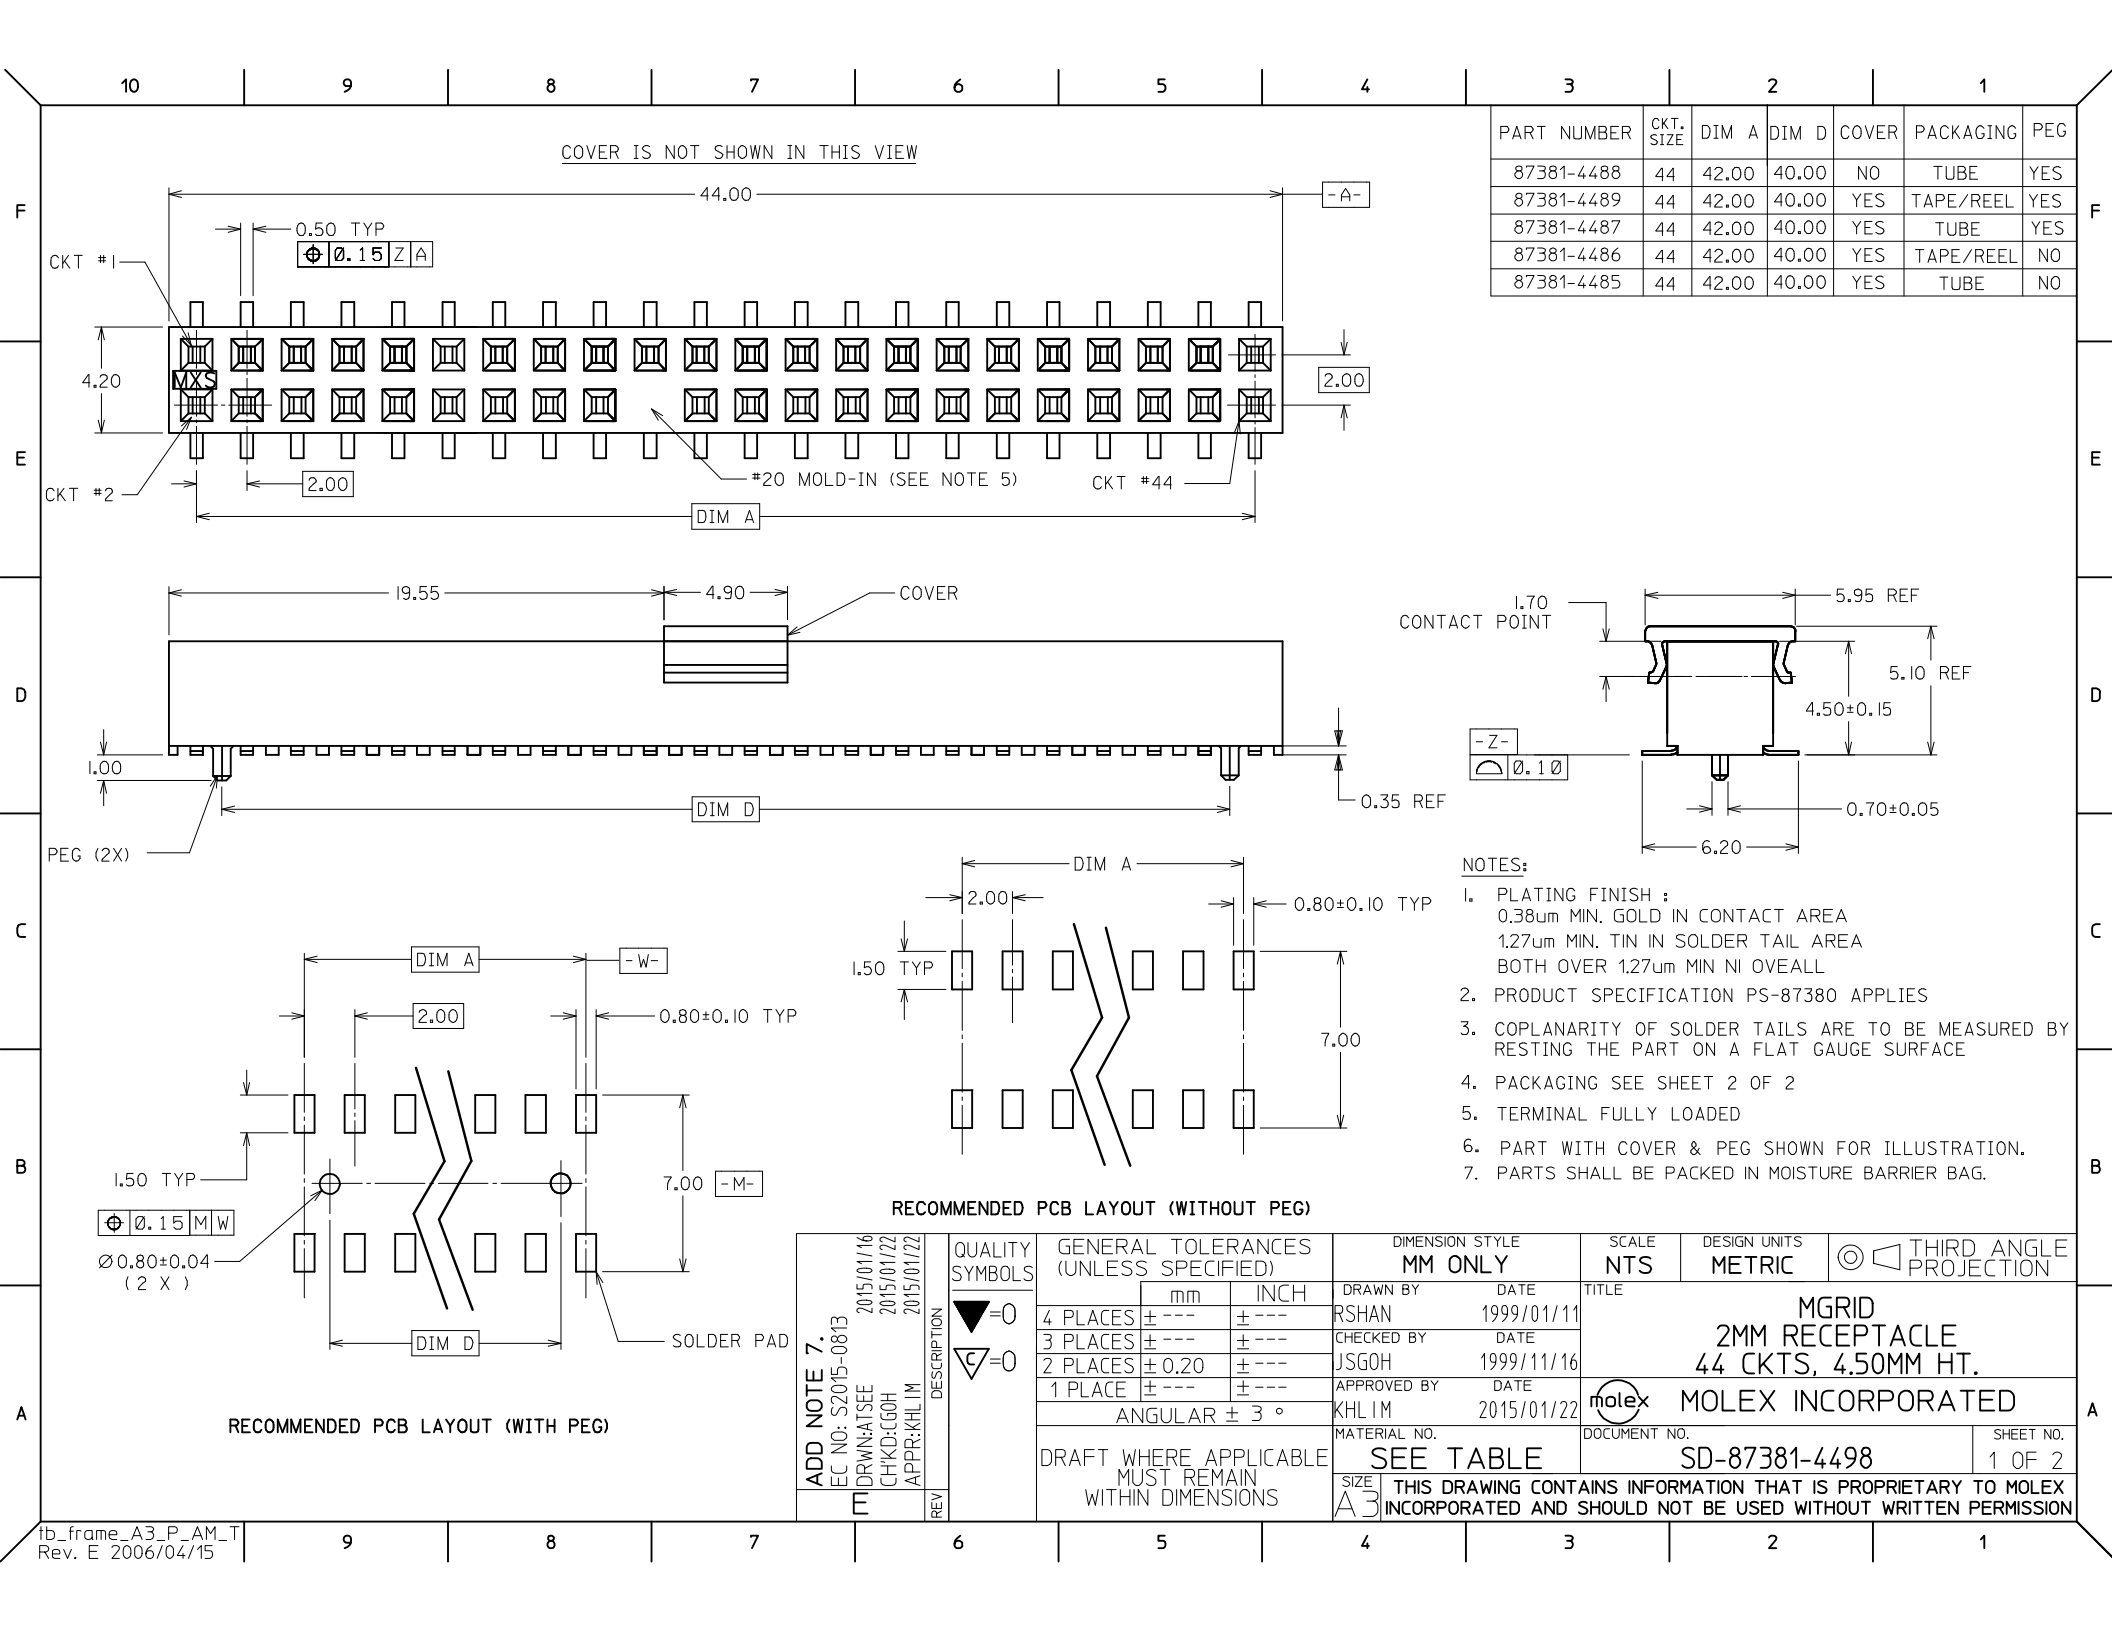

10 9 8 7 6 5 4 3 2 1

F


E

D

C

B

A

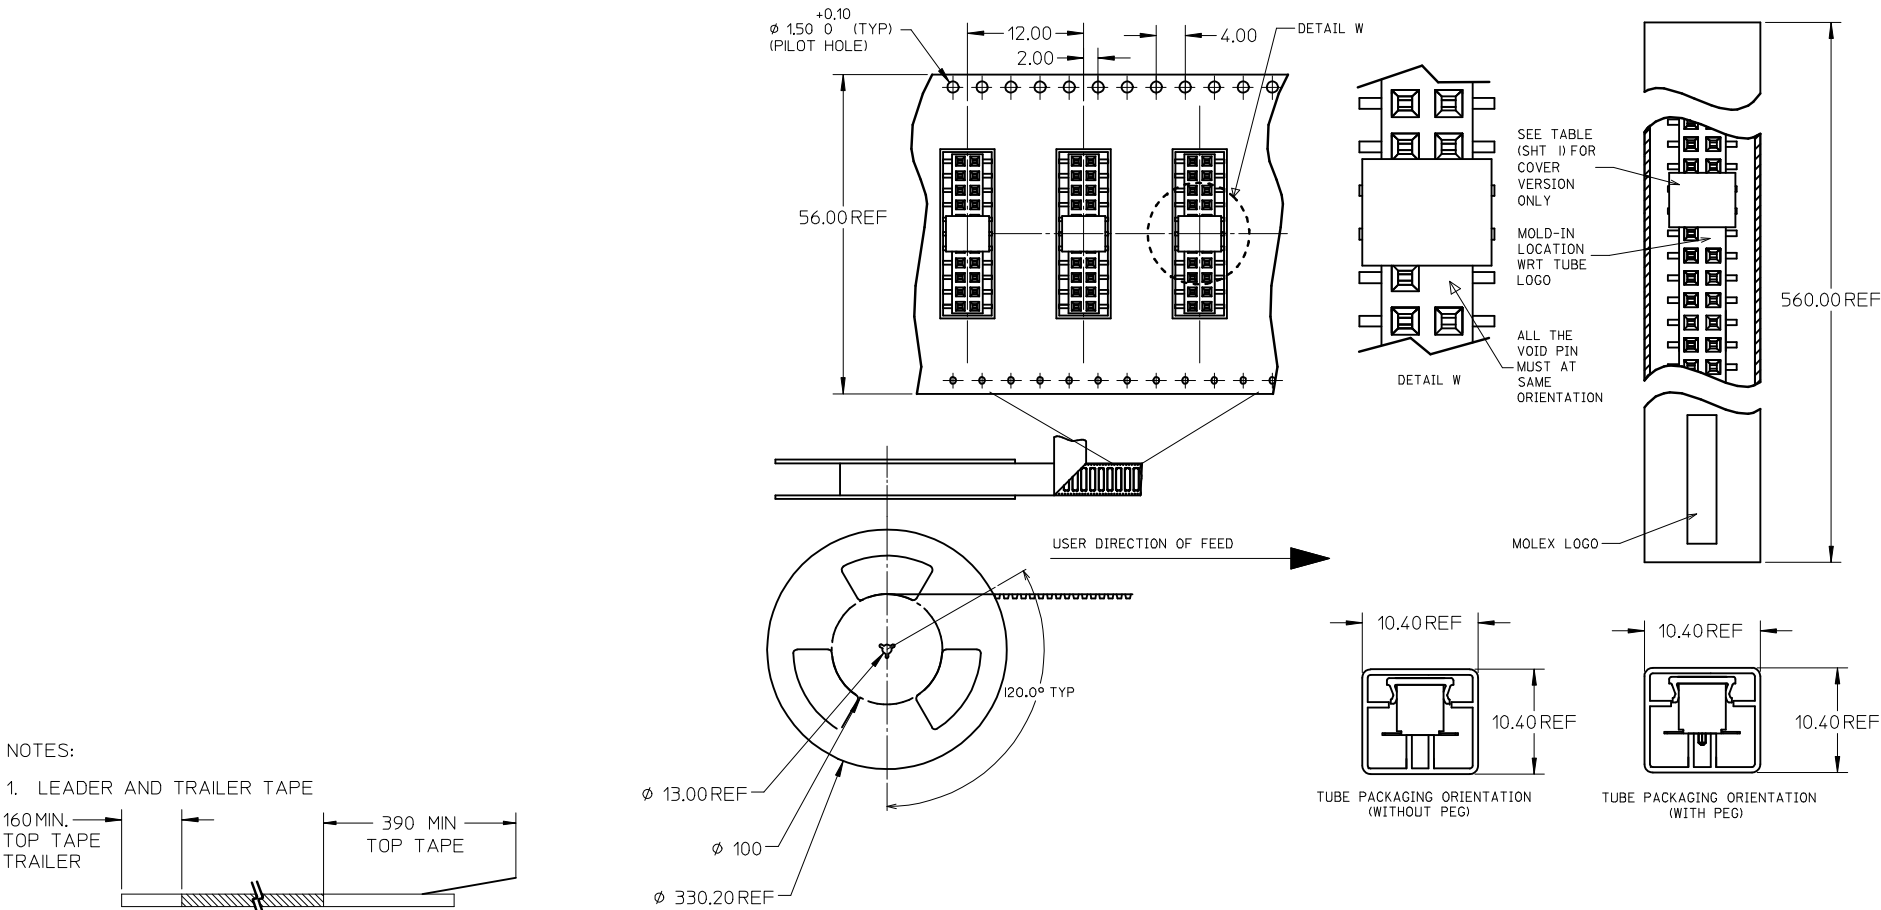

- NOTES:
- LEADER AND TRAILER TAPE
 - PEELING OFF FORCE OF THE TOP TAPE: 20-80gf.
(PEELING DIRECTION AS SHOWN IN FOLLOWING FIGURE)
 - PACKAGING STANDARD IS AS PER EIA-481.
 - TAPE & REEL QUANTITY = 800 PCS/REEL

ADD NOTE 7. EC NO: S2015-0813 DRWN:ATSEE CHKD:CGOH APPR:KHLIM 2015/01/16 2015/01/22 2015/01/22	QUALITY SYMBOLS ▽=0 ◻=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION 			
				mm	INCH	DRAWN BY RSHAN	DATE 1999/01/11	TITLE MGRID 2MM RECEPTACLE 44 CKTS, 4.50MM HT.				
			4 PLACES	± ---	± ---	CHECKED BY JSGOH	DATE 1999/11/16					
			3 PLACES	± ---	± ---	APPROVED BY KHLIM	DATE 2015/01/22	MOLEX INCORPORATED DOCUMENT NO. SD-87381-4498 SHEET NO. 2 OF 2				
			2 PLACES	± 0.20	± ---	MATERIAL NO. SEE TABLE						
			1 PLACE	± ---	± ---	SIZE A3 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						
			ANGULAR ± 3 °			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						

9 8 7 6 5 4 3 2 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

[87381-4487](#) [87381-4488](#) [87381-4489](#)